

SCHEMA ELETTRICO

TX – 32PG50D

**DE INGESLOTEN TECHNISCHE
DOCUMENTATIE EN INSTELLINGEN ZIJN
ALLEEN VAN TOEPASSING VOOR
INSTELLINGEN VAN TELEVISIE SETS OP
DE ITALIAANSE MARKT.**

ADJUSTMENT PROCEDURE

Item / Preparation	Adjustment/Confirmation
+B SET-UP 4. Receive a Window pattern. 5. Set the controls :- Brightness Minimum Contrast Minimum Volume Minimum	Confirm the following voltages. A - Board A1 Pin2 7.5 ± 0.5V IC1252 Pin2 2.5 ± 0.25V A1 Pin12 -20 ± 0.5V IC1251 Pin3 3.3 ± +0.3 / -0.2V A1 Pin16 20 ± 0.5V IC3302 Pin3 12 ± 0.6V A2 Pin15 30 ± 0.5V IC2707 Pin3 8 ± 0.4V A2 Pin6 15 ± 0.5V L2707 (IC2708) 9 ± 0.4V A3 Pin4 15 ± 0.5V L2704 (IC2706) 5 ± 0.2V A3 Pin2 -15 ± 0.5V L2716 (IC2705) 3.3 ± 0.2V L2717 (IC2709) 3.3 ± 0.2V D – Board TPD8-GND 7.5 ± 0.5V TPD9-TPD11 38.5 ± 2V TPD10-GND 15.5 ± 1V TPD13-GND 14.5 ± 1V TPD15-GND 144.8 ± 1V TPD32-GND 209 ± 10V C864-GND -15.5 ± 1V D2 Pin15-GND 31 ± 1V
CUT OFF 1. Receive a Window pattern. 2. Degauss the tube externally. 3. Set the TV into Service Mode 1. 4. Select Sub brightness mode.	To adjust Cutoff connect an oscilloscope to the Blue cathode. Adjust " Cutoff " value using the " Yellow " and " Blue " buttons until the black level is 170V ± 5V, press " STR " to store the value. Remove the oscilloscope. Select Highlight/Lowligh t mode press " 5 " to collapse the screen and adjust the screen " VR " until the display is just visible, press " 5 " to return to service mode. Using the " Yellow " and " Blue " buttons adjust until optimum picture white balance is achieved, press " STR " to store the value. Select Sub Brightness mode and adjust until optimum picture brightness is achieved.

FACTORY SETTINGS

To return customer settings to factory settings and clear owner ID of all information input by the customer, enter Self-Check mode. Press the down (-/v) button on the customer controls at the front of the TV set, at the same time pressing the **STATUS** button on the remote control. To exit Self Check, switch off the TV set at the power button.

NOTE: Self Check should only be used when refurbishing the TV set and not during normal repair work.















MEM	:	O.K.	Sum	:	****	←
GC1	:	O.K.				
GC2	:	O.K.	OPTION 1	:	01	
VDU	:	O.K.	OPTION 2	:	00	
CIP	:	O.K.	OPTION 3	:	13	
RGB	:	O.K.	OPTION 4	:	10	
AVSW	:	O.K.	OPTION 5	:	00	
Tun1	:	O.K.	OPTION 6	:	50	
Tun2	:	O.K.	OPTION 7	:	80	
DAC1	:	O.K.	OPTION 8	:	41	
MSP	:	O.K.	OPTION 9	:	83	
DOLBY	:	O.K.	OPTION 10	:	80	
CODEC	:	O.K.	OPTION 11	:	19	
DAC2	:	O.K.	OPTION 12	:	08	
DAC3	:	O.K.	OPTION 13	:	FA	
			Check	:	BA	

Factory use only

If the CCU ports have been checked and found to be incorrect or not located then " - - " will appear in place of "O.K."

WAVEFORM PATTERN TABLE

Note: All waveforms have been taken using a standard colour bar pattern.




ALIGNMENT SETTINGS

(The figures below are nominal and used for representative purposes only.)


1. Set the Bass to maximum position, set the Treble to minimum position, press the down button (- / v) on the customer controls at the front of the TV and at the same time press the **INDEX** button on the remote control, this will place the TV into the Service Mode.
2. Press the **RED / GREEN** buttons to step up / down through the functions.
3. Press the **YELLOW / BLUE** buttons to alter the function values.
4. Press the **STR** button after each adjustment has been made to store the required values.
5. To exit the Service Mode, press the **"N"** button.

Alignment Function		Settings / Special features
Horizontal Position	H – Pos 97	Optimum setting.
Vertical Position	V – Pos 111	Optimum setting.
Horizontal Amplitude	H – Amp 86	Optimum setting.
Vertical Amplitude	V – Amp 134	Optimum setting.
Parabola	Parabola 26	Optimum setting.
Trapezoid	Trapezoid 124	Optimum setting.
Horizontal Parallel	H – Parallel 13	Optimum setting.
Vertical Linearity	V – Linear 34	Optimum setting.
Top Corner	Top – Corner 20	Optimum setting.
Bottom Corner	Bottom – Corner 20	Optimum setting.
Vertical Symmetry Correction	V – S – Correct 9	Optimum setting.
Center Correction	C – Correct 10	Optimum setting.
DAF - Phase	DAF – Phase 205	Optimum setting.
Highlight Lowlight	High 0144 0126 0128 Low 0331 0340 0384	Optimum setting.
Sub-Brightness	Sub-Brightness 144	Optimum setting.
Video Gain 2	Video Gain 2 157	Optimum setting.
Splitter Gain (Tuner)	SPL. Gain 0	Optimum setting.


VIDEO BLOCK DIAGRAM

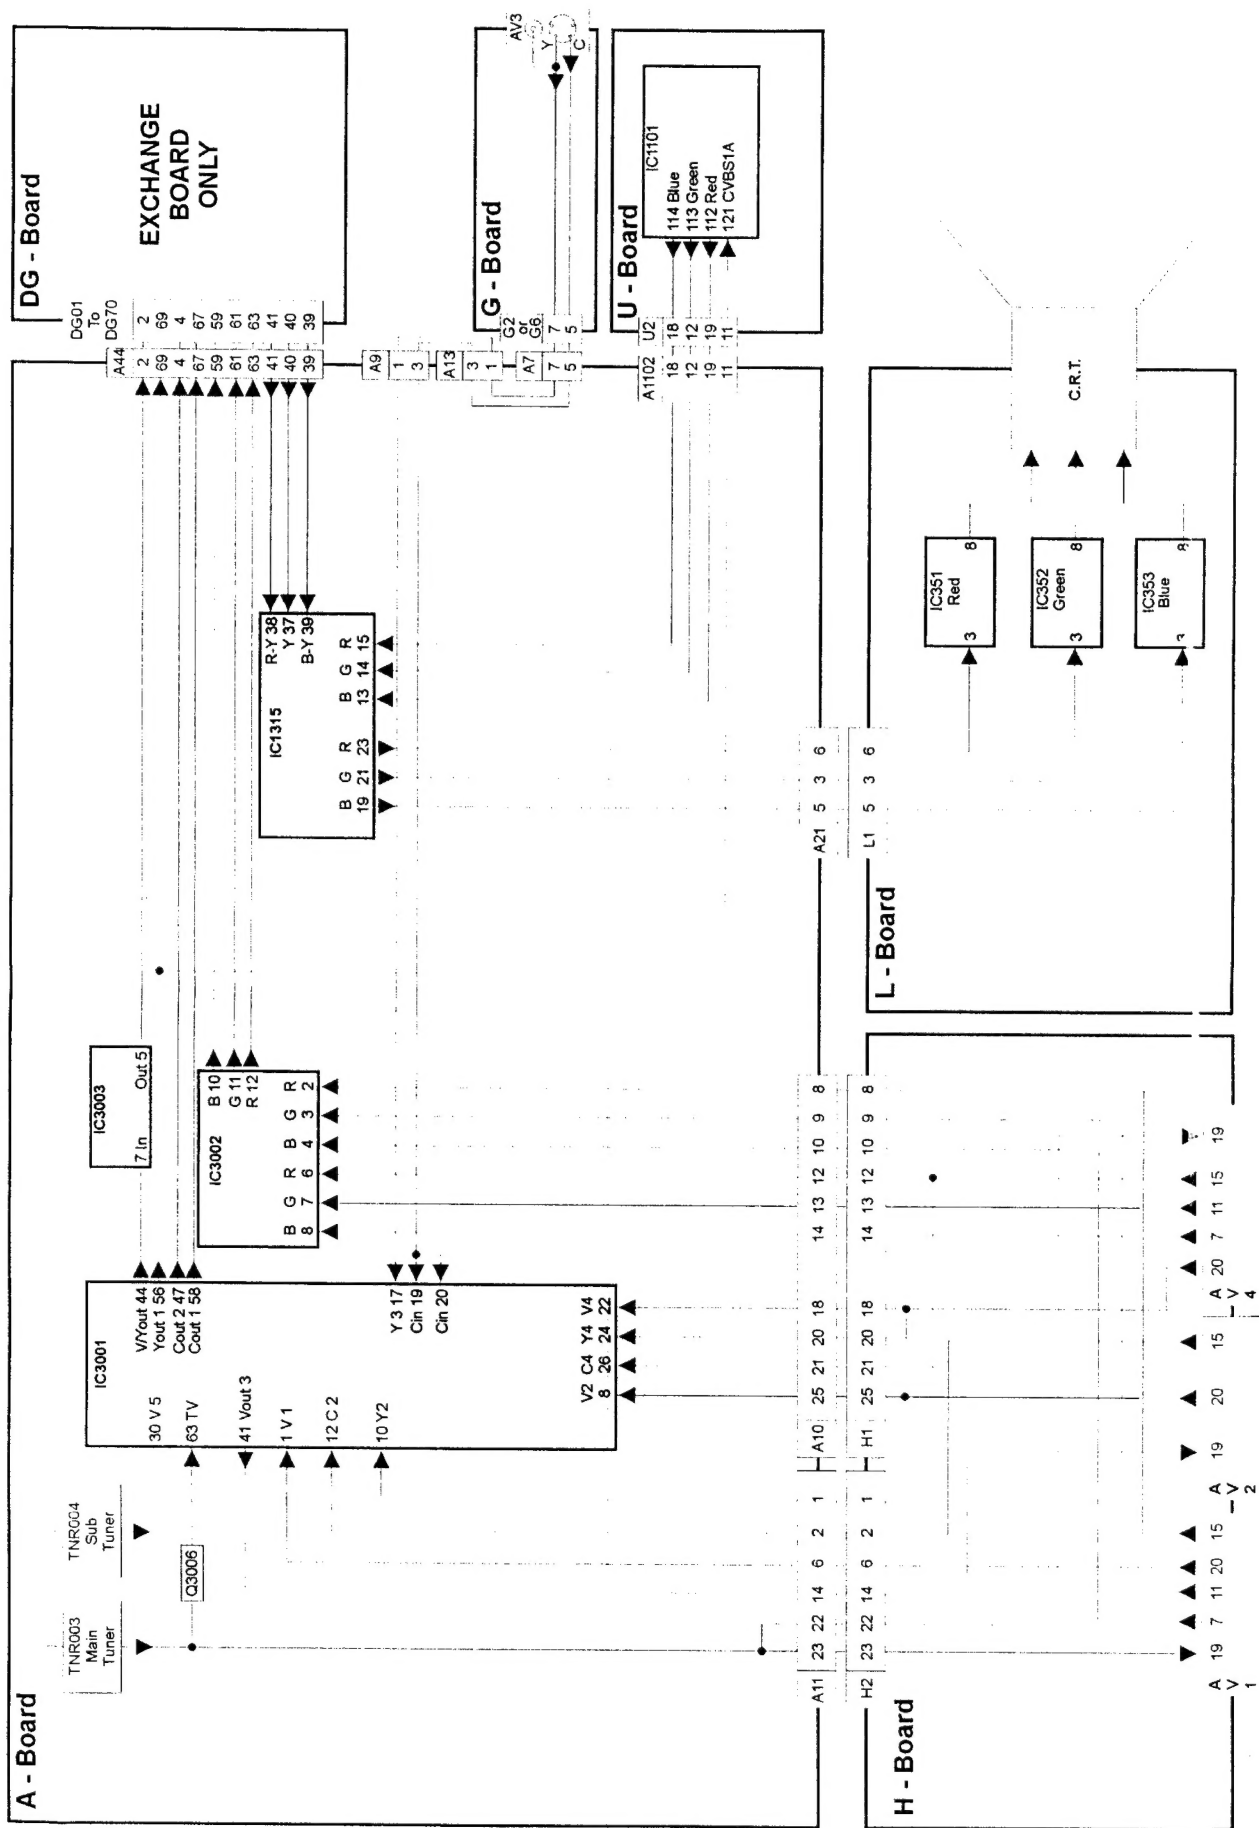


AUDIO BLOCK DIAGRAM

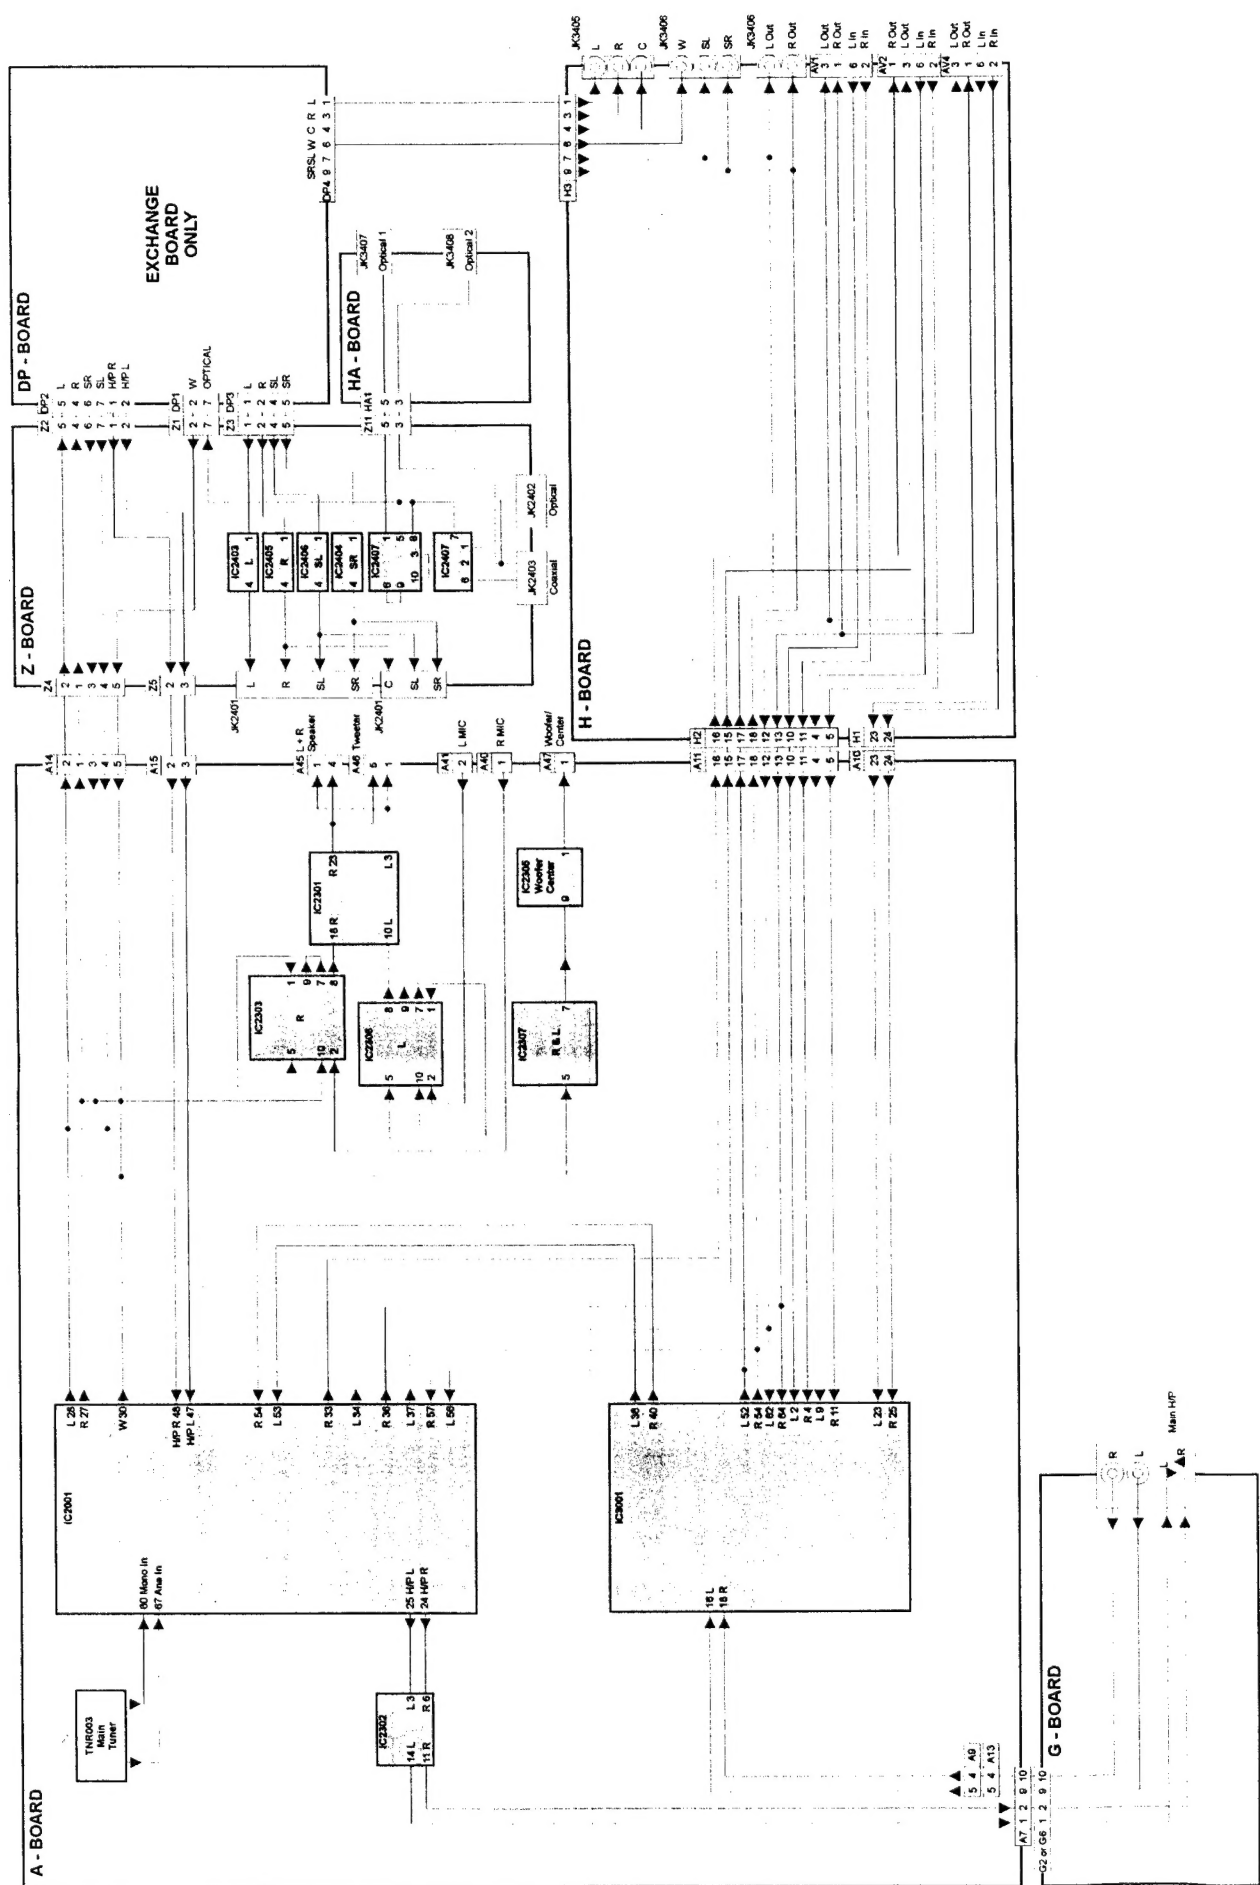


CONTROL BLOCK DIAGRAM

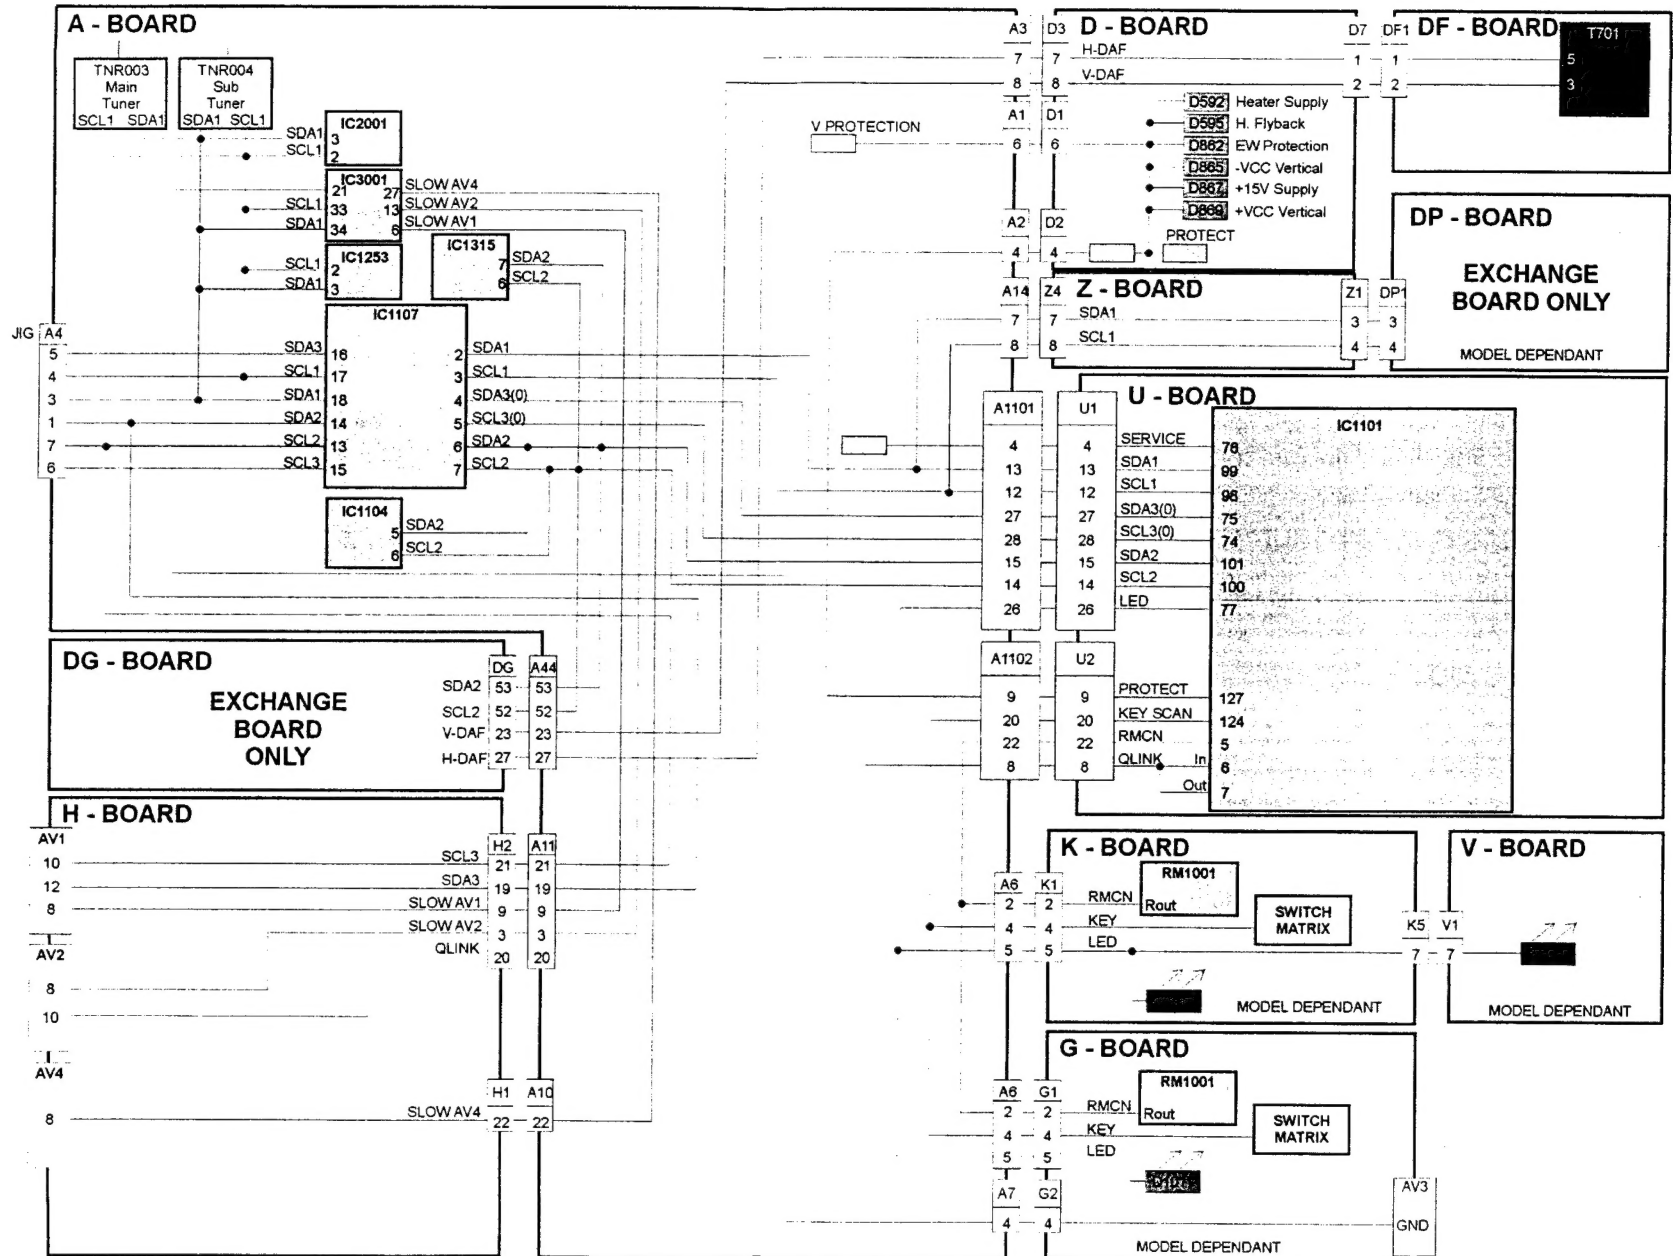

POWER SUPPLY BLOCK DIAGRAM

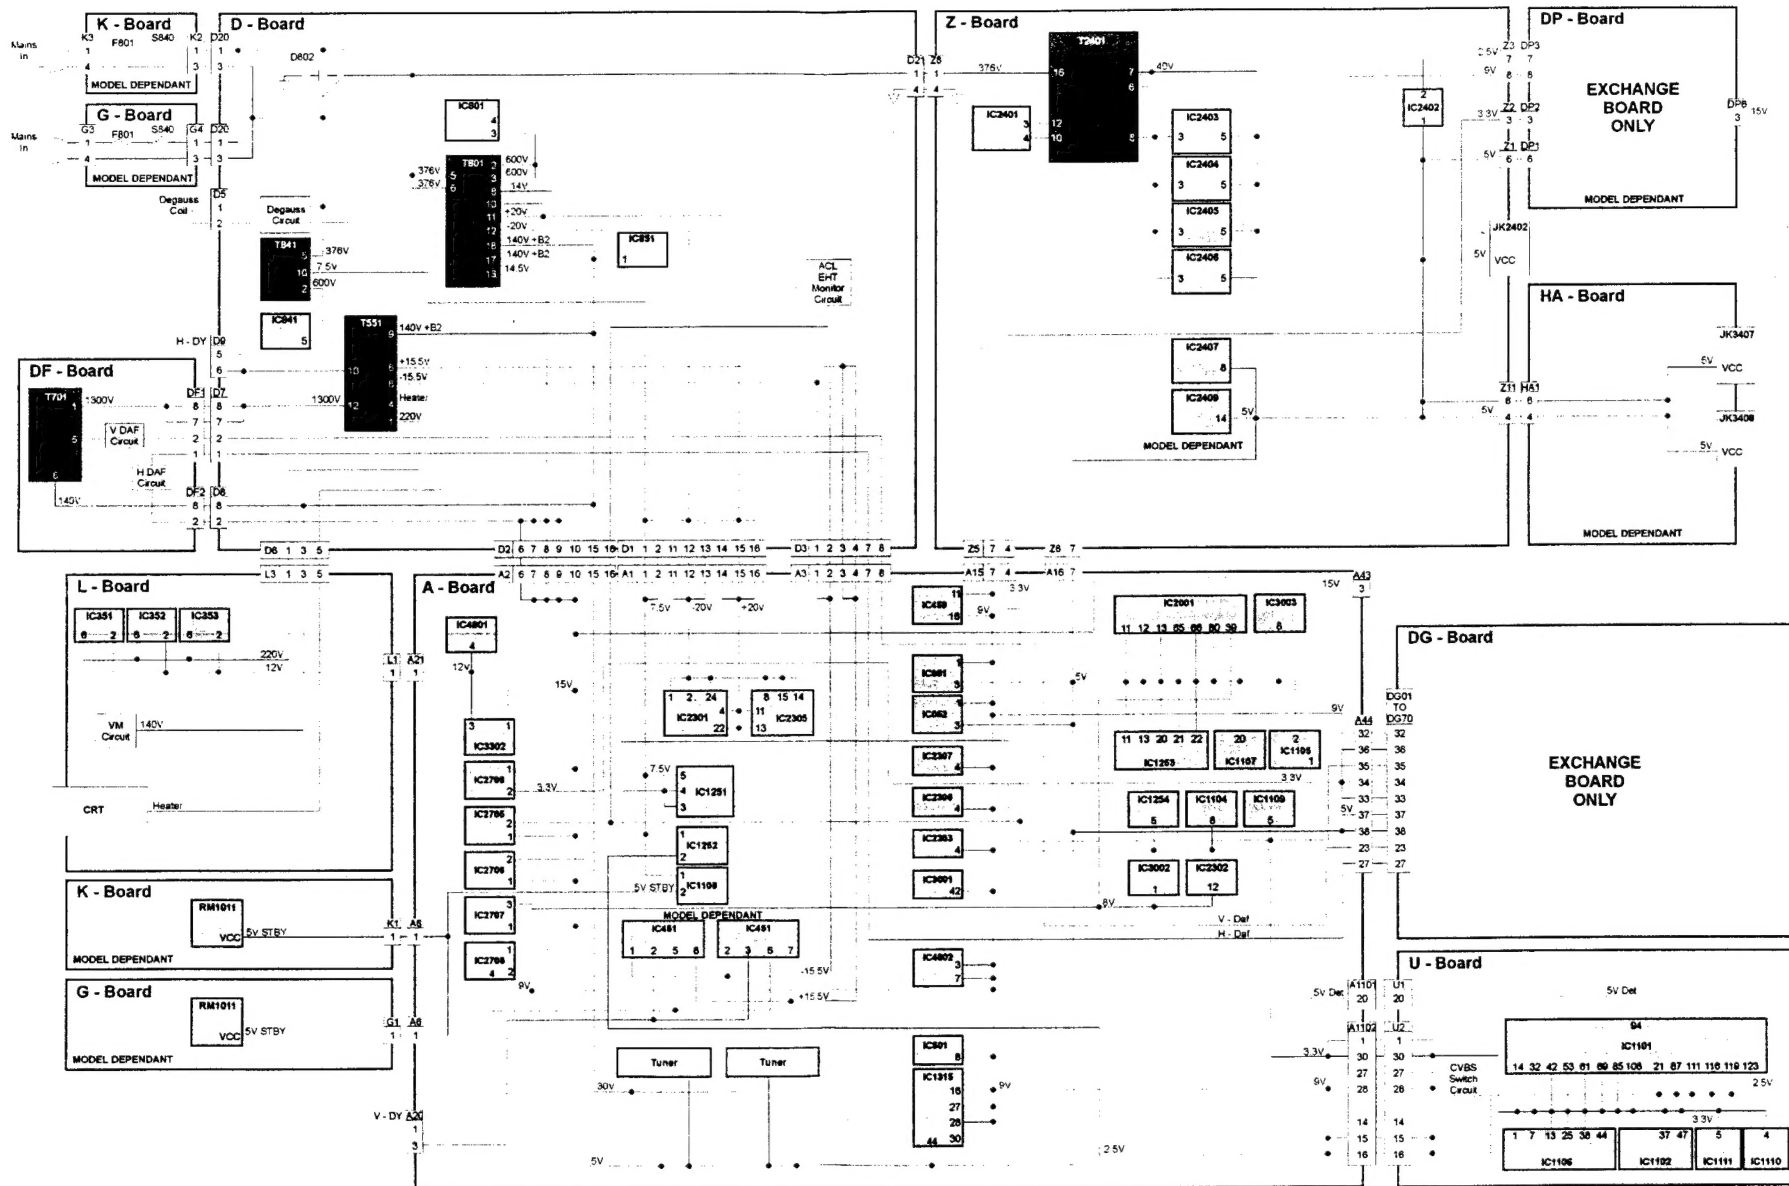


WIRING BLOCK DIAGRAM

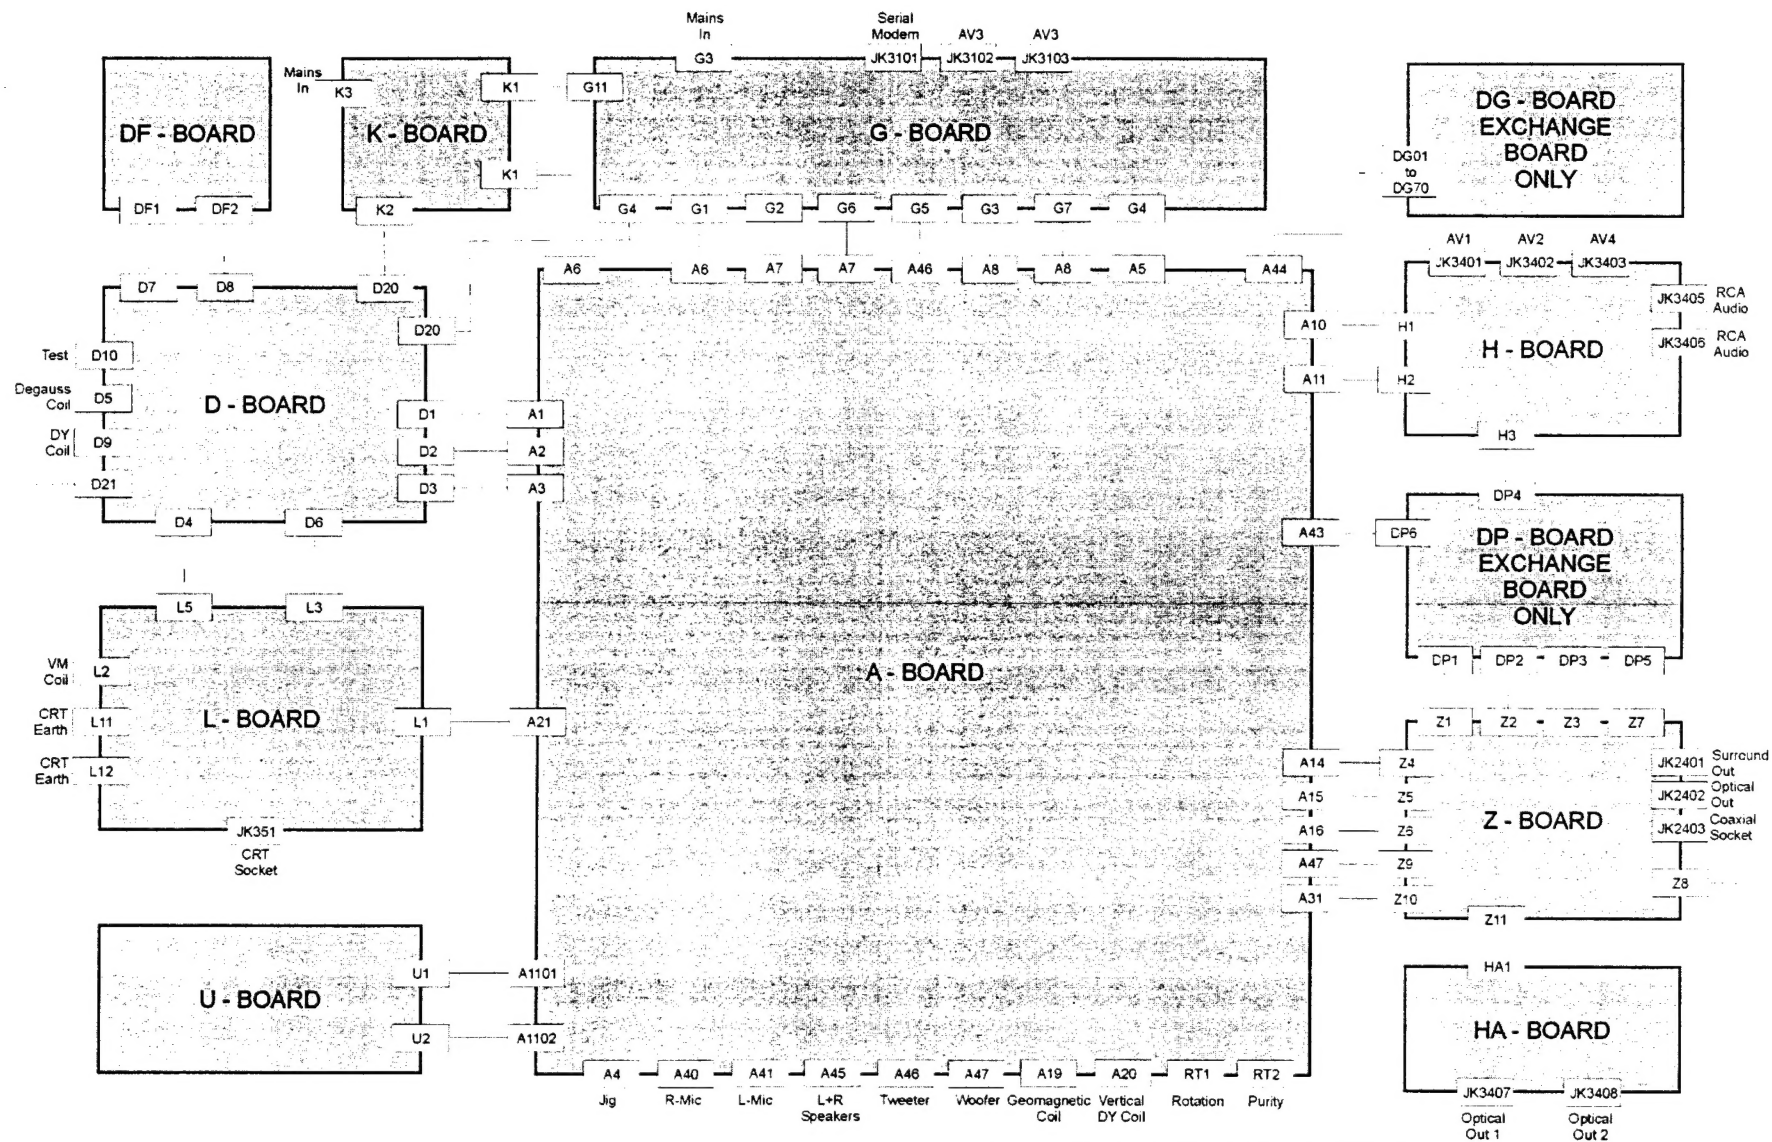

PARTS LOCATION

NOTE:

The numbers on the exploded view below refer to the mechanical section of the Replacement Parts List.

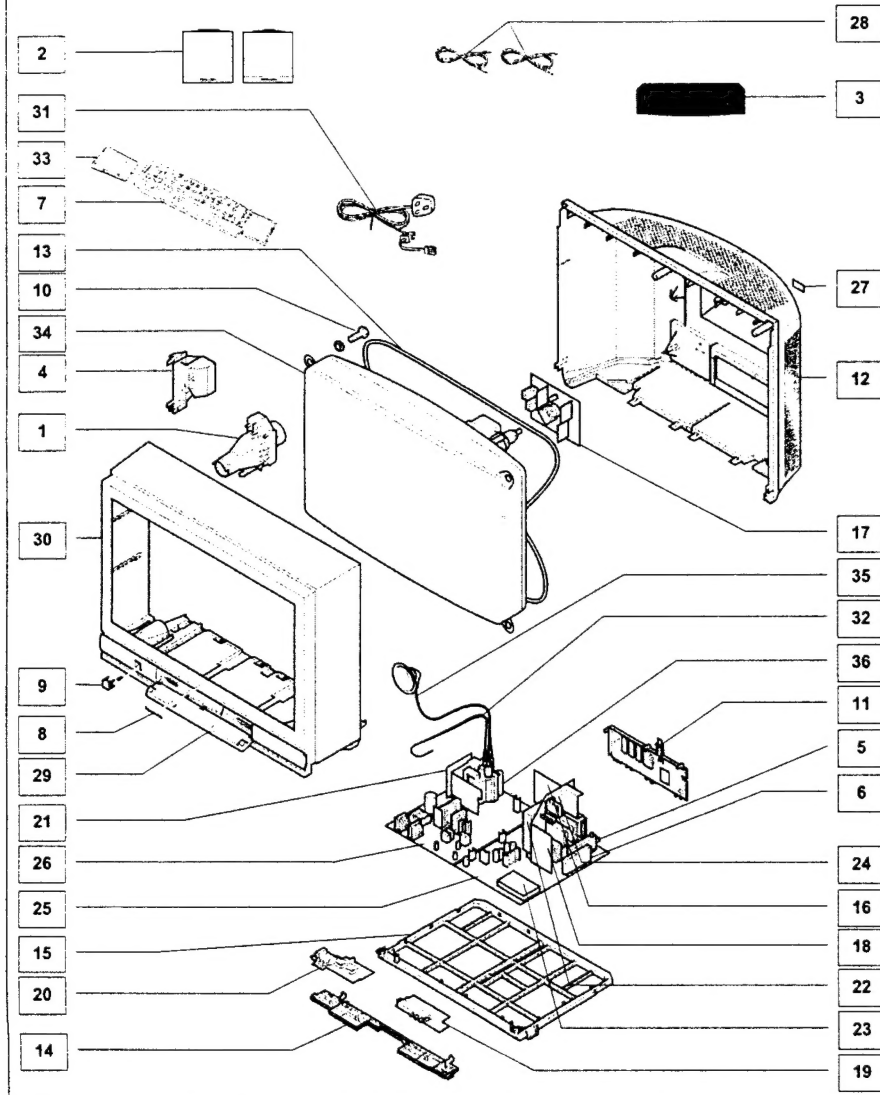

REPLACEMENT PARTS LIST

Important Safety Notice

Components identified by Δ mark have special characteristics important for safety.
* When replacing any of these components, use only manufacturers specified parts.
In case of ordering these spare parts, please always add the complete Model-Type number to your order.

Cct Ref	Parts Number	Description
EXPLODED VIEW		
1	EAB12149C2	SPEAKER (WOOFER)
2	EAS8E430-A	EXT SPEAKER
3	EAS8E440-A	CENTRE SPEAKER
4	EASG7DH08B2	SPEAKER (TWEETER)
5	ENG27510G	TUNER
6	ENG27C01G	TUNER
7	EUR511224	REMOTE CONTROL
8	TBMA059	PANASONIC BADGE
9	TBXA24302	POWER BUTTON
10	THT1062	CRT FIXING SCREW
11	TKPB61324	AV PANEL
12	TKUC08903	BACK COVER
13	TLKBE05147	DEGAUSS COIL
14	TMWAD17-1	CONTROL BRACKET
15	TMXBE050	CHASSIS FRAME
16	TNPA1724	H.P.C.B.
17	TNPA1726AE	L.P.C.B.
18	TNPA1727AB	DP P.C.B EXCHANGE UNIT
19	TNPA1728	G.P.C.B.
20	TNPA1729	K.P.C.B.
21	TNPA1806	DF P.C.B.
22	TNPA1965AB	DG P.C.B EXCHANGE UNIT
23	TNPA2042AM	U.P.C.B.
24	TNPA2270	Z.P.C.B.
25	TNPH0348AB	A.P.C.B.
26	TNPH0349	D.P.C.B.
27	TQF8E3045	MODEL LABEL
28	TSXB0015S	DOLBY SPEAKER WIRE 12M
29	TTPA0128	DOOR LID
30	TTYA0412-1	CABINET
31	TXASX01CJUG	POWER CORD
32	TXJF0C0EFG	FOCUS LEAD ASSEMBLY
33	URS1EC904A	BATTERY COVER (REMOTE)
34	WB6LPX955X07	C.R.T.
35	ZTBZAD650E	ANODE CABLE
36	ZTFM77008A	F.B.T.
MISCELLANEOUS COMPONENTS		
	EAS9099	SPEAKER DRIVE UNIT
	T2S9EV617	BAFFLE
	TBL63413	RUBBER FOOT
	TBM8E2039	AV LABEL
	TBM8E2053	LABEL
	TBMU101	LEFT PRESET LABEL
	TBMU102	RIGHT PRESET LABEL
	TEKX008	DOOR CATCHER
	TKPA36301	FRONT LEFT PANEL
	TKPA36401	FRONT RIGHT PANEL
	TKRA13110	HANDLE
	TKRA19701	HANDLE
	TMWJ019-1	LED HOLDER
	TMXBE051	POWER BUTTON JOINT

Cct Ref	Parts Number	Description
	TPC8E4842	CARTON
	TPC8E4843	CARTON BOTTOM
	TPC8E4888	OUTER CARTON
	TPD169487	CARTON HANDLE
	TPD8E734	CUSHION TOP
	TPD8E735	CUSHION BOTTOM
	TPD8E737	SUB CUSHION LHS
	TPD8E738	SUB CUSHION RHS
	TS-36PG50	VIDEO CABINET
	TZS1EK002	SERVICE PACK
	UM-3DJ-2P	BATTERY PACK
SK401	TES2298	CRT EARTH SPRING
SK402	TES2298	CRT EARTH SPRING
INSTRUCTION BOOKS		
	TQB8E3045	ENGLISH
I.C.s		
D354	TL431CLPM	REGULATOR
IC051	AN7805FLB	5V REGULATOR
IC351	TDA6111Q-N4	RGB OUTPUT
IC352	TDA6111Q-N4	RGB OUTPUT
IC353	TDA6111Q-N4	RGB OUTPUT
IC451	LA7876N	VERTICAL OUTPUT
IC459	TC74HC221AF	MULTIVIBRATOR
IC501	NJM2903MTE1	AUDIO AMPLIFIER
IC801	STRF8658LF53	POWER SUPPLY
IC841	MP0254SPSCF	POWER SUPPLY SWITCHING
IC851	SE140N	ERROR AMPLIFIER
IC1101	SDA6000-A23	MICRO PROCESSOR
IC1102	E2F0101D05	EEPROM *
IC1104	X24BR200-3AA	EAROM *
IC1105	S-80843ALY-Z	5V REGULATOR
IC1106	TVSA0395	SDRAM
IC1107	TC7M8D3245FK	CONVERTER
IC1108	AN78L05TA	5V REGULATOR
IC1109	PST9119NR	SYSTEM RESET
IC1110	PST9128NR	RESET
IC1111	TC7SH32FUEL	2 INPUT GATE
IC1251	Si-3039C	3.5V REGULATOR
IC1252	PQ30RV21B	2.5V REGULATOR
IC1253	M62392FP70BC	D/A CONVERTER
IC1254	PST9128NR	RESET
IC1315	AN5394FB	R.G.B. PROCESSOR
IC2001	MSP3410DQACS	M.S.P.
IC2301	TDA7490	AUDIO AMPLIFIER
IC2302	AN7108	H.P. AMPLIFIER
IC2303	NJM2059MTE1	QUAD AMPLIFIER
IC2305	TDA7481	AUDIO AMPLIFIER
IC2306	NJM2059MTE1	QUAD AMPLIFIER
IC2307	NJM2059MTE1	QUAD AMPLIFIER
IC2401	STR10006-N	POWER SUPPLY
IC2402	PQ30RV21B	2.5V REGULATOR
IC2404	TDA2030AV	AUDIO AMPLIFIER

Cct Ref	Parts Number	Description
IC2405	TDA2030AV	AUDIO AMPLIFIER
IC2406	TDA2030AV	AUDIO AMPLIFIER
IC2407	TC7W04FEL	BUFFER
IC2705	PQ1CG21H2RZ	REGULATOR
IC2706	PQ1CG21H2RZ	REGULATOR
IC2707	AN7808LB	8V REGULATOR
IC2708	SI-8090K	POWER SUPPLY
IC2709	PQ1CG21H2RZ	REGULATOR
IC3001	CXA2069Q-TL	SWITCHING
IC3002	TDA8601T/C1	12V REGULATOR
IC3003	CXA1211M-T4	VIDEO AMPLIFIER
IC3302	L78M12MRB	12V REGULATOR
IC4801	AN6564NS-E1	OPERATIONAL AMPLIFIER
IC4802	PUB4301	GEOMAGNETIC CORRECTION
RM1001	RPM6937-S	LED RECEIVER

FUSES

F801-2	EYF52BC	FUSE HOLDER
F801-1	EYF52BC	FUSE HOLDER
F801	XBA2C50TH15	FUSE

DIODES

D003	MA3150HTX	DIODE
D004	MA3150HTX	DIODE
D010	MA152KTX	DIODE
D053	MA152KTX	DIODE
D351	ERA15-04V3	DIODE
D352	ERA15-04V3	DIODE
D353	MA3110LTX	DIODE
D355	ERA15-04V3	DIODE
D356	ERA15-04V3	DIODE
D358	MA151ATX	DIODE
D360	ERA15-02V3	DIODE
D361	MA151ATX	DIODE
D362	MA151ATX	DIODE
D363	MA151ATX	DIODE
D364	MA3130MTX	DIODE
D365	MA3130MTX	DIODE
D366	MA3130MTX	DIODE
D367	MA3051HTX	DIODE
D368	MA3051HTX	DIODE
D369	MA3051HTX	DIODE
D383	ERA15-04V3	DIODE
D385	ERA22-04V3	DIODE
D386	ERA15-04V3	DIODE
D389	ERA15-04V3	DIODE
D450	EU02AV1	DIODE
D452	MA152KTX	DIODE
D453	EU02AV1	DIODE
D454	MA152KTX	DIODE
D455	MA152KTX	DIODE
D456	ERA22-02V3	DIODE
D465	MA3039HTX	DIODE
D502	MA4150TA	DIODE
D503	ERA81C04V3	DIODE
D504	D1NL40V70	DIODE
D521	AU02AV0	DIODE
D522	AU02AV0	DIODE
D523	MA165TA5	DIODE
D524	MA165TA5	DIODE
D525	RP1HLFA5	DIODE
D526	RP1HLFA5	DIODE
D553	MA167TA5	DIODE
D554	EU02	DIODE
D555	RH3GLF102	DIODE
D557	MA1033MTA	DIODE
D558	AU02V0	DIODE
D559	FMV3GULF730	DIODE

Cct Ref	Parts Number	Description
D580	MA165TA5	DIODE
D562	MA182TA	DIODE
D570	RU3ANV1	DIODE
D580	MA4360	DIODE
D591	MA165TA5	DIODE
D592	MA4104	DIODE
D593	ERA15-02V3	DIODE
D594	MA165TA5	DIODE
D595	MA4360MTA	DIODE
D701	D1NL40V70	DIODE
D802	D6SB80LF-8	DIODE
D805	MA2240-BLFS	DIODE
D809	MA2082-ALFS	DIODE
D811	MA2082-ALFS	DIODE
D819	ERA22-04V3	DIODE
D820	ERA22-04V3	DIODE
D821	ERA22-04V3	DIODE
D823	PC123FY2	DIODE
D825	232266296706	THERMISTOR
D826	232266296706	THERMISTOR
D843	ERC0510V1	DIODE
D844	TVSSR2KL	DIODE
D845	RY24V1	DIODE
D847	ERA22-10	DIODE
D848	PC123FY2	DIODE
D851	FMGG26S	DIODE
D852	MA4030LTA	DIODE
D853	RU2AMLFA1	DIODE
D854	RU2AMLFA1	DIODE
D855	FMGG2CS	DIODE
D856	EU02	DIODE
D857	FMGG26S	DIODE
D858	MA165TA5	DIODE
D859	MA165TA5	DIODE
D861	MA165TA5	DIODE
D862	MA4360MTA	DIODE
D865	MA165TA5	DIODE
D867	MA165TA5	DIODE
D869	MA165TA5	DIODE
D881	MA165TA5	DIODE
D885	MA4056HTA	DIODE
D886	MA165TA5	DIODE
D887	MA165TA5	DIODE
D888	EU02	DIODE
D953	R2KNLFA1	DIODE
D961	MA152KTX	DIODE
D1011	LNH201RFCC4	L.E.D.
D1152	MA152KTX	DIODE
D1153	MA152KTX	DIODE
D1302	MA152KTX	DIODE
D1306	MA3062MTX	DIODE
D1307	MA3091MTX	DIODE
D1308	MA152KTX	DIODE
D1309	MA152KTX	DIODE
D1310	MA3062MTX	DIODE
D1311	MA3062MTX	DIODE
D1312	MA3062MTX	DIODE
D1313	MA3043MTX	DIODE
D1315	MA3043MTX	DIODE
D2040	MA152KTX	DIODE
D2041	MA152KTX	DIODE
D2048	MA152KTX	DIODE
D2301	TVSRM28V1	DIODE
D2302	MTZJT-775.6B	DIODE
D2305	MA3047MTX	DIODE
D2306	MA29TA5	DIODE

Cct Ref	Parts Number	Description
D2311	MA1180HTA	DIODE
D2312	MA3130MTX	DIODE
D2313	MA152KTX	DIODE
D2314	MA152KTX	DIODE
D2316	MA152KTX	DIODE
D2401	MA4200MTA	DIODE
D2402	D5L80F4015	DIODE
D2403	TVSEH1LF-F7	DIODE
D2404	MTZJT-778.2A	DIODE
D2405	EU02	DIODE
D2406	EU02	DIODE
D2407	EG01CV0	DIODE
D2410	EU02	DIODE
D2411	FMGG26S	DIODE
D2432	MA167TA5	DIODE
D2433	MA167TA5	DIODE
D2434	MA167TA5	DIODE
D2436	MA167TA5	DIODE
D2437	MA167TA5	DIODE
D2438	MA167TA5	DIODE
D2711	RK34LFC4	DIODE
D2712	AK04V0	DIODE
D2713	RK34LFC4	DIODE
D2714	RK34LFC4	DIODE
D2715	MA29TA5	DIODE
D3003	MA3091LTX	DIODE
D3004	MA3091LTX	DIODE
D3103	MA165TA5	DIODE
D3104	MA165TA5	DIODE
D3401	MA165TA5	DIODE
D3402	MA165TA5	DIODE

TRANSISTORS

Q002	BC857B	TRANSISTOR
Q052	BC857B	TRANSISTOR
Q369	BC857B	TRANSISTOR
Q451	BC847B	TRANSISTOR
Q460	BC847B	TRANSISTOR
Q461	BC847B	TRANSISTOR
Q462	BC847B	TRANSISTOR
Q463	BC847B	TRANSISTOR
Q501	2SK2962TPE6	TRANSISTOR
Q521	2SK1006RF122	TRANSISTOR
Q522	2SC3311ATA	TRANSISTOR
Q523	2SC3311ATA	TRANSISTOR
Q524	2SC5460LB	TRANSISTOR
Q525	2SC3311ATA	TRANSISTOR
Q551	2SC5591000RK	TRANSISTOR
Q552	2SC1473ATA	TRANSISTOR
Q703	2SK2538000LB	TRANSISTOR
Q805	2SK2123000LB	TRANSISTOR
Q851	2SA1018QTA	TRANSISTOR
Q854	2SC3311ATA	TRANSISTOR
Q874	2SA684R	TRANSISTOR
Q875	2SA720-RS	TRANSISTOR
Q881	2SC3311ATA	TRANSISTOR
Q882	2SC3311ATA	TRANSISTOR
Q883	2SC1317-TA	TRANSISTOR
Q902	BC847B	TRANSISTOR
Q903	BC847B	TRANSISTOR
Q908	BC847B	TRANSISTOR
Q951	BC857B	TRANSISTOR
Q952	BC847B	TRANSISTOR
Q953	BC847B	TRANSISTOR
Q954	BC857B	TRANSISTOR
Q955	2SA1535ARLB	TRANSISTOR
Q956	2SC3944ARLB	TRANSISTOR

Cct Ref	Parts Number	Description
Q1003	2SC3311ATA	TRANSISTOR
Q1107	BC847B	TRANSISTOR
Q1108	BC847B	TRANSISTOR
Q1109	BC847B	TRANSISTOR
Q1110	BC847B	TRANSISTOR
Q1111	BC847B	TRANSISTOR
Q1112	BC847B	TRANSISTOR
Q1113	BC847B	TRANSISTOR
Q1114	BC847B	TRANSISTOR
Q1115	BC847B	TRANSISTOR
Q1121	BC847B	TRANSISTOR
Q1122	BC847B	TRANSISTOR
Q1123	BC847B	TRANSISTOR
Q1125	BC847B	TRANSISTOR
Q1301	BC847B	TRANSISTOR
Q1302	BC847B	TRANSISTOR
Q1336	BC857B	TRANSISTOR
Q1340	BC847B	TRANSISTOR
Q2002	BC857B	TRANSISTOR
Q2003	BC857B	TRANSISTOR
Q2004	BC857B	TRANSISTOR
Q2005	BC857B	TRANSISTOR
Q2040	BC847B	TRANSISTOR
Q2041	BC847B	TRANSISTOR
Q2042	BC847B	TRANSISTOR
Q2043	BC847B	TRANSISTOR
Q2213	BC847B	TRANSISTOR
Q2214	BC847B	TRANSISTOR
Q2215	BC847B	TRANSISTOR
Q2216	BC847B	TRANSISTOR
Q2301	BC847B	TRANSISTOR
Q2302	BC847B	TRANSISTOR
Q2303	BC847B	TRANSISTOR
Q2307	BC847B	TRANSISTOR
Q2308	BC857B	TRANSISTOR
Q2309	BC847B	TRANSISTOR
Q2310	BC847B	TRANSISTOR
Q2311	BC847B	TRANSISTOR
Q2402	2SA684R	TRANSISTOR
Q2403	2SA720-RS	TRANSISTOR
Q2432	BC847B	TRANSISTOR
Q2433	BC847B	TRANSISTOR
Q2434	BC847B	TRANSISTOR
Q2435	BC847B	TRANSISTOR
Q2438	2SK198RTX	TRANSISTOR
Q2439	2SK198RTX	TRANSISTOR
Q2440	2SK198RTX	TRANSISTOR
Q2441	BC857B	TRANSISTOR
Q2506	BC847B	TRANSISTOR
Q2507	BC847B	TRANSISTOR
Q2508	BC847B	TRANSISTOR
Q2509	BC847B	TRANSISTOR
Q2512	BC847B	TRANSISTOR
Q2513	BC847B	TRANSISTOR
Q3001	BC847B	TRANSISTOR
Q3002	BC847B	TRANSISTOR
Q3006	BC857B	TRANSISTOR
Q3007	BC847B	TRANSISTOR
Q3011	BC847B	TRANSISTOR
Q3071	BC847B	TRANSISTOR
Q3072	BC847B	TRANSISTOR
Q3130	BC847B	TRANSISTOR
Q3131	BC857B	TRANSISTOR
Q3132	BC847B	TRANSISTOR
Q3401	BC857B	TRANSISTOR
Q3807	BC847B	TRANSISTOR

Cct Ref	Parts Number	Description
Q3808	BC847B	TRANSISTOR
TRANSFORMERS		
L810	ETQR45T001A	TRANSFORMER
T501	ETH19Y187AY	TRANSFORMER
T701	ETF18L101A	TRANSFORMER
T801	ETS39AG296AC	TRANSFORMER
T841	ETS19AB1G6AG	TRANSFORMER
T2401	ETS35AA457AD	TRANSFORMER

COILS		
L002	ELESN2R2KA	COIL
L003	ELESN2R2KA	COIL
L004	EXCELD35V	COIL
L008	EXCELD35V	COIL
L009	EXCELD35V	COIL
L053	EXCELD35V	COIL
L055	ELESN2R2KA	COIL
L056	ELESN2R2KA	COIL
L351	EXCELSA24T	COIL
L381	ELESN6R8JA	COIL
L382	ELESN4R7KA	COIL
L383	ELESN4R7KA	COIL
L387	EXCELD35V	COIL
L521	TALL13T182JB	COIL
L559	EXCELD35C	COIL
L560	EXCELD35V	COIL
L561	EXCELD35C	COIL
L563	EXCELSA39V	COIL
L568	EXCELD35C	COIL
L571	EXCELD35C	COIL
L574	ELH5L7701	LINEARITY COIL
L575	ELHKL8071B	COIL
L576	ELC18B331E	COIL
L701	TALFF15B152K	COIL
L702	ELC18B331E	COIL
L703	EXCELSA35T	COIL
L704	EXCELD35V	COIL
L812	EXCELSA39V	COIL
L815	EXCELSA39V	COIL
L818	EXCELSA39V	COIL
L860	TALL08T100KA	COIL
L862	TALL08T680KA	COIL
L874	EXCELSA35T	COIL
L877	EXCELSA35T	COIL
L883	TALL08T181KA	COIL
L890	ELF18D486D	COIL
L891	ELF18D486D	COIL
L895	EXCELSA35T	COIL
L904	TLT560K991R	COIL
L953	EXCELSA35T	COIL
L954	EXCELSA35T	COIL
L956	EXCELSA35T	COIL
L1103	TALC325T4R7M	COIL
L1104	TALC325T4R7M	COIL
L1106	ELESN4R7KA	COIL
L1107	TALC325T4R7M	COIL
L1108	TALC325T4R7M	COIL
L1109	TALC325T4R7M	COIL
L1110	TALC325T4R7M	COIL
L1111	ELESN4R7KA	COIL
L1112	EXCELD35V	COIL
L1115	TALC325T3R3M	COIL
L1116	TALC325T4R7M	COIL
L1312	EXCELD35V	COIL
L1322	EXCELD35V	COIL
L2001	EXCELD35V	COIL
L2002	EXCELD35V	COIL

Cct Ref	Parts Number	Description
L2004	TLT068K991R	COIL
L2005	EXCELD35V	COIL
L2007	EXCELD35V	COIL
L2008	EXCELD35V	COIL
L2009	TALC325T4R7M	COIL
L2010	TALC325T4R7M	COIL
L2278	EXCELSA35T	COIL
L2301	TALL08T100KA	COIL
L2302	TALL08T100KA	COIL
L2303	TAL10RP390LB	COIL
L2305	TAL10RP390LB	COIL
L2308	TALL08T270KA	COIL
L2309	TAL10RP390LB	COIL
L2311	ELESN101KA	COIL
L2312	TALL08T100KA	COIL
L2313	TALL08T100KA	COIL
L2314	EXCELD35V	COIL
L2316	EXCELD35V	COIL
L2318	EXCELD35V	COIL
L2320	EXCELD35V	COIL
L2321	EXCELD35V	COIL
L2322	EXCELD35V	COIL
L2323	EXCELD35V	COIL
L2324	EXCELD35V	COIL
L2325	EXCELD35V	COIL
L2407	EXCELSA35T	COIL
L2409	EXCELSA35T	COIL
L2410	EXCELSA35T	COIL
L2412	EXCELSA35T	COIL
L2414	EXCELD35C	COIL
L2415	EXCELD25V	COIL
L2431	TALL08T270KA	COIL
L2433	TALL08T270KA	COIL
L2435	TALL08T270KA	COIL
L2436	TALL08T270KA	COIL
L2437	TALL08T270KA	COIL
L2438	TALL08T270KA	COIL
L2439	TLTACT100K	COIL
L2440	EXCEMT271BT	COIL
L2523	ELESN6R8KA	COIL
L2524	ELESN6R8KA	COIL
L2527	EXCELSA35T	COIL
L2703	EXCELD35V	COIL
L2704	TALL08T330KA	COIL
L2705	EXCELD35V	COIL
L2706	TAL10RP151LB	COIL
L2707	EXCELD35V	COIL
L2708	EXCELD35V	COIL
L2709	TLPP095	COIL
L2710	EXCELD35V	COIL
L2712	TAL10RP151LB	COIL
L2713	EXCELD35V	COIL
L2714	EXCELD35V	COIL
L2715	EXCELD35V	COIL
L2716	TALL08T330KA	COIL
L2717	TALL08T330KA	COIL
L2718	TLPP095	COIL
L2719	TLPP095	COIL
L2722	EXCELD35V	COIL
L2724	EXCELD35V	COIL
L2725	EXCELD35V	COIL
L2727	EXCELD35V	COIL
L2729	EXCELD35V	COIL
L2730	EXCELD35V	COIL
L2732	EXCELD35V	COIL
L2734	EXCELD35V	COIL

Cct Ref	Parts Number	Description
L2735	EXCELD35V	COIL
L3004	ELESN4R7KA	COIL
L3050	ELESN221KA	COIL
L3401	EXCELSA35T	COIL
L3402	EXCELSA35T	COIL
L3403	EXCELD35V	COIL
L3404	EXCELD35V	COIL
L3405	EXCELD35V	COIL
L3406	EXCELD35V	COIL
L3407	EXCELD35V	COIL
L3408	EXCELD35V	COIL
L3409	EXCELD35V	COIL
L3410	EXCELD35V	COIL
L3411	EXCELD35V	COIL
L3412	EXCELD35V	COIL
L3413	EXCELD35V	COIL
L3414	EXCELD35V	COIL
L3415	EXCELD35V	COIL
L3416	EXCELSA35T	COIL
L3417	EXCELSA35T	COIL
L3418	EXCELSA35T	COIL
L3419	EXCELSA35T	COIL
L3420	ELESN4R7KA	COIL
L3424	EXCELD25V	COIL
L4801	EXCELD35V	COIL
L4802	EXCELD35V	COIL
L4803	EXCELD35V	COIL
L4804	EXCELD35V	COIL
LC1101	TLK212T256AL	COIL
LC1102	TLK212T256AL	COIL
LC1104	TLK212T256AL	COIL
LC1105	TLK212T256AL	COIL
LC1106	TLK212T256AL	COIL
LC1110	TLK212T256AL	COIL
LC1111	TLK212T256AL	COIL
LC1112	TLK212T256AL	COIL
LC1113	TLK212T256AL	COIL
LC1114	TLK20LFA224M	COIL
LC1115	TLK20LFA103M	COIL
LC1116	TLK20LFA103M	COIL
LC1117	TLK20LFA103M	COIL
LC1118	TLK20LFA103M	COIL
LC1119	TLK20LFA103M	COIL
LC1120	TLK20LFA103M	COIL
LC1121	TLK20LFA224M	COIL
LC1122	TLK20LFA224M	COIL
LC1123	TLK20LFA224M	COIL
LC1124	TLK20LFA224M	COIL
LC1125	TLK20LFA103M	COIL
LC1126	TLK20LFA103M	COIL
LC1127	TLK20LFA103M	COIL
LC1128	TLK20LFA103M	COIL
LC1130	TLK20LFA103M	COIL
LC1131	TLK20LFA103M	COIL
LC1132	TLK20LFA103M	COIL
LC1133	TLK20LFA103M	COIL
LC1134	TLK20LFA103M	COIL
LC1135	TLK212T256AL	COIL
LC1136	TLK20LFA103M	COIL
LC1137	TLK20LFA103M	COIL
LC1138	TLK20LFA103M	COIL
LC1139	TLK20LFA103M	COIL
LC1140	TLK212T256AL	COIL
LC1141	TLK20LFA103M	COIL
LC1142	TLK20LFA103M	COIL
LC1143	TLK20LFA103M	COIL

Cct Ref	Parts Number	Description
LC1144	TLK212T256AL	COIL
LC1145	TLK212T256AL	COIL
LC1146	TLK212T256AL	COIL

FILTERS		
L893	ELF24V032B	FILTER
L894	ELF24V034A	FILTER
LC1107	ELKE103FA	FILTER
LC1108	ELKE103FA	FILTER
LC1109	ELKE103FA	FILTER
LC1147	ELKE103FA	FILTER

CRYSTALS		
X2101	TSSA128	CRYSTAL
X2501	TSSA172	CRYSTAL
X3501	H0J600400006	CRYSTAL

RESISTORS		
C025	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
D842	ERZV10D621CS	VARISTOR 10W 20% 620 0
JA1	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA2	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA3	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA4	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA5	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA6	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA7	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA8	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA9	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA10	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA11	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA12	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA13	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA14	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA15	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA16	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA17	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA18	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA19	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA20	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA21	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA22	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA23	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA24	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA25	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA26	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA27	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA28	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA29	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA30	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA31	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA32	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA33	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA34	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA35	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA36	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA37	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA38	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA39	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA40	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA41	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA42	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA43	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA44	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA45	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA46	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA47	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA48	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA49	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0
JA50	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 0

Cct Ref	Parts Number	Description				
JSA21	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA22	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA27	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA28	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA31	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA33	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA34	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA35	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA36	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA42	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA45	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA46	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA47	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA48	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA52	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA53	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA55	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA57	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA59	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA62	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA64	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA65	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA66	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA67	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA69	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA71	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA74	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA75	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA84	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA89	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA90	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSA101	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSH1	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSH2	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSH3	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSH7	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSH8	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSH9	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSL10	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSL14	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSU1	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSU3	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSZ7	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
JSZ18	ERJ8GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
L1101	ERD25TC0T	CARBON	0.25W	5%	0 Ω	
L1307	ERD25TC0T	CARBON	0.25W	5%	0 Ω	
L2307	ERD25TC0T	CARBON	0.25W	5%	0 Ω	
L2315	ERD25TC0T	CARBON	0.25W	5%	0 Ω	
L2317	ERD25TC0T	CARBON	0.25W	5%	0 Ω	
L2318	ERD25TC0T	CARBON	0.25W	5%	0 Ω	
L3002	ERD25TC0T	CARBON	0.25W	5%	0 Ω	
L3003	ERD25TC0T	CARBON	0.25W	5%	0 Ω	
LC1343	QJT1090	JUMPER	0.1W	5%	0 Ω	
LC1344	QJT1090	JUMPER	0.1W	5%	0 Ω	
R001	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R002	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω	
R003	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω	
R005	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R008	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω	
R052	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω	
R053	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω	
R055	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R056	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R057	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R059	ERJ6ENF5600	S.M.CARB	0.1W	1%	560 Ω	
R060	ERJ6ENF5600	S.M.CARB	0.1W	1%	560 Ω	

Cct Ref	Parts Number	Description				
R064	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω	
R351	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820 Ω	
R352	ERJ6ENF1801	S.M.CARB	0.1W	1%	1.8K Ω	
R353	ERJ6ENF1331	S.M.CARB	0.1W	1%	330 Ω	
R354	ERG3FJ5823	METAL	3W	5%	82K Ω	
R355	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R356	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω	
R357	ERC12GK471C	SOLID	0.5W	5%	470 Ω	
R360	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560 Ω	
R361	ERJ6ENF1801	S.M.CARB	0.1W	1%	1.8K Ω	
R362	ERG3FJ5823	METAL	3W	5%	82K Ω	
R363	ERJ6ENF1331	S.M.CARB	0.1W	1%	330 Ω	
R364	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R365	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω	
R366	ERC12GK561	SOLID	0.5W	10%	560 Ω	
R370	ERJ6GEYJ271	S.M.CARB	0.1W	5%	270 Ω	
R371	ERJ6ENF1801	S.M.CARB	0.1W	1%	1.8K Ω	
R372	ERJ6ENF1331	S.M.CARB	0.1W	1%	330 Ω	
R373	ERG3FJ823	METAL	3W	5%	82K Ω	
R374	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R375	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω	
R376	ERC12GK561	SOLID	0.5W	10%	560 Ω	
R382	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R385	ERJ6GEYJ184	S.M.CARB	0.1W	5%	180K Ω	
R387	ERD51TJ471	CARBON	0.5W	5%	470 Ω	
R451	ERD51TJ3R3	CARBON	0.5W	5%	3R3 Ω	
R452	ERD51TJ3R3	CARBON	0.5W	5%	3R3 Ω	
R453	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39K Ω	
R454	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω	
R455	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R456	ERG3FJ221	METAL	3W	5%	220 Ω	
R457	ERJ6ENF7151	S.M.CARB	0.1W	1%	7K15 Ω	
R458	ERJ6ENF3481	S.M.CARB	0.1W	1%	3K48 Ω	
R459	ERJ6ENF5311	S.M.CARB	0.1W	1%	9K53 Ω	
R460	ERJ6ENF3011	S.M.CARB	0.1W	1%	300 Ω	
R461	ERD51FJ1R0	CARBON	0.5W	5%	1 Ω	
R462	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R463	ERJ6GEYJ563	S.M.CARB	0.1W	5%	56K Ω	
R464	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R465	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R467	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω	
R468	ERJ6GEYJ224	S.M.CARB	0.1W	5%	220K Ω	
R469	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω	
R470	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R471	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R472	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7 Ω	
R473	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω	
R474	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R475	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R507	ERD52TJ104T	CARBON	2W	5%	100K Ω	
R508	ERD25TJ271	CARBON	0.25W	5%	270 Ω	
R509	ERX3FJ1R0	METAL	3W	5%	1 Ω	
R510	ERG1FJ561	METAL	1W	5%	560 Ω	
R511	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R512	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω	
R513	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R514	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R520	ERD25TJ153	CARBON	0.25W	5%	15K Ω	
R521	ERG2FJ5123	METAL	2W	5%	12K Ω	
R522	ERD25TJ101	CARBON	0.25W	5%	100 Ω	
R523	ERD25TJ103	CARBON	0.25W	5%	10K Ω	
R524	ERD25TJ103	CARBON	0.25W	5%	10K Ω	
R525	ERD25TJ102	CARBON	0.25W	5%	1K Ω	
R526	ERC14GK184	SOLID	0.25W	5%	180K Ω	
R527	ERC14GK224	SOLID	1/4W	5%	220K Ω	
R530	ERD25TJ101	CARBON	0.25W	5%	100 Ω	

Cct Ref	Parts Number	Description				
R531	ERC14GK334	SOLID	0.25W	10%	330K Ω	
R532	ERD25TJ473	CARBON	0.25W	5%	47K Ω	
R533	ERG3FJ5821	METAL	3W	5%	820 Ω	
R534	ERD52TJ333T	CARBON	2W	5%	33K Ω	
R535	ERG1FJ5332	METAL	1W	5%	3R3K Ω	
R536	ERG3FJ5821	METAL	3W	5%	820 Ω	
R537	ERC12GK104V	SOLID	0.5W	10%	100K Ω	
R538	ERC14GK225	SOLID	1/4W	5%	2.2M Ω	
R540	ERD25TJ560	CARBON	0.25W	5%	56 Ω	
R551	ERD25TJ103	CARBON	0.25W	5%	10K Ω	
R552	ERD52TJ223T	CARBON	2W	5%	22K Ω	
R555	ERO25TKF4702	METAL	0.25W	1%	47K Ω	
R556	ERF2AKR18P	WOUND	2W	1%	R18 Ω	
R557	ERD50PKF2802	METAL	0.5W	1%	8K Ω	Δ
R558	ERD52TKF2202	METAL	0.25W	10%	22K Ω	
R559	ERD52TKF1502	METAL	2W	1%	15K Ω	
R560	ERD52TKF3902	METAL	0.25W	10%	39K Ω	
R564	ERD25CKF1002	METAL	0.25W	1%	10K Ω	Δ
R566	ERD52TJ222T	CARBON	0.5W	5%	2K2 Ω	
R569	ERD52TJ222T	CARBON	0.5W	5%	2K2 Ω	
R570	ERD52TJ222T	CARBON	0.5W	5%	2K2 Ω	
R572	ERD25TJ153	CARBON	0.25W	5%	15K Ω	
R577	ERG3FJ331	METAL	3W	5%	330 Ω	Δ
R578	ERG3FJ331	METAL	3W	5%	330 Ω	Δ
R580	ERD52TJ223T	CARBON	2W	5%	22K Ω	
R581	ERD52TJ154	CARBON	2W	5%	150K Ω	
R582	ERD25TJ274	CARBON	0.25W	5%	270K Ω	
R583	ERD25TJ822	CARBON	0.25W	5%	8K2 Ω	
R584	ERD25TJ272F	CARBON	0.25W	5%	2K7 Ω	
R586	ERQ2CJP2R2	METAL	2W	5%	2R2 Ω	Δ
R591	ERD25TKF9311	METAL	0.25W	1%	9K31 Ω	
R592	ERD25TKF1132	METAL	0.25W	1%	1K13 Ω	
R593	ERQ14AJW100	FUSIBLE	0.25W	5%	10 Ω	Δ
R594	ERD25TJ334	CARBON	0.25W	5%	330K Ω	
R647	ERJ6GEYJ680	S.M.CARB	0.1W	5%	68 Ω	
R652	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω	
R653	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω	
R654	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R655	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R656	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R657	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R658	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω	
R705	ERF5ZJ471	WOUND	5W	5%	470 Ω	
R714	ERD51FJ680	CARBON	0.5W	5%	68 Ω	
R719	ERF5AK4R7	WOUND	5W	1%	4R7 Ω	
R779	ERJ6ENF1152	S.M.CARB	0.1W	1%	1K5 Ω	
R780	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω	
R781	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R782	ERD52TJ391T	CARBON	2W	5%	390 Ω	
R783	ERJ6GEYJ682	S.M.CARB	0.1W	5%	6K8 Ω	
R801	ERF7ZK2R7	WOUND	7W	20%	2R7 Ω	
R803	ERG3FJ5183	METAL	3W	5%	18K Ω	
R804	ERG3FJ5183	METAL	3W	5%	18K Ω	
R806	ERX12SZJR12	METAL	0.5W	5%	R12 Ω	
R807	ERC14GK824C	SOLID	0.25W	10%	820K Ω	
R810	ERX12SZJR12	METAL	0.5W	5%	R12 Ω	
R815	ERD51TJ151	CARBON	0.5W	5%	150 Ω	
R819	ERD25TJ681	CARBON	0.25W	5%	680 Ω	
R820	ERD52TJ562	CARBON	2W	5%	5.6K Ω	
R836	ERD52TJ152T	CARBON	0.5W	5%	1K5 Ω	
R837	ERD52TJ152T	CARBON	0.5W	5%	1K5 Ω	
R839	ERD75TAJ825	CARBON	0.75W	5%	8M2 Ω	Δ
R841	ERF2AJ560	WOUND	2W	5%	56 Ω	
R842	ERG1FJ5104	METAL	1W	5%	100K Ω	
R843	ERD25TJ101	CARBON	0.25W	5%	100 Ω	
R851	ERD52TJ153	CARBON	0.5W	5%	15K Ω	

Cct Ref	Parts Number	Description					
R1084	ERD25TJ101	CARBON	0.25W	5%	100 Ω		
R1101	ERJ3GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω		
R1102	ERJ3GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω		
R1103	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω		
R1104	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R1105	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω		
R1106	ERJ3GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω		
R1107	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7 Ω		
R1108	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7 Ω		
R1109	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7 Ω		
R1110	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7 Ω		
R1111	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R1112	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R1113	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω		
R1114	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω		
R1115	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R1116	ERJ3GEYJ153V	S.M.CARB	0.1W	5%	15K Ω		
R1117	ERJ3GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω		
R1118	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R1119	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R1120	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R1121	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R1122	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω		
R1123	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω		
R1124	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω		
R1125	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω		
R1126	ERJ3GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω		
R1127	ERJ3GEYOR00	S.M.CARB	0.1W	5%	0 Ω		
R1128	ERJ3GEYJ273	S.M.CARB	0.1W	5%	27K Ω		
R1129	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R1131	ERJ3GEYOR00	S.M.CARB	0.1W	5%	0 Ω		
R1132	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R1134	ERJ3GEYJ473V	S.M.CARB	0.1W	5%	47K Ω		
R1135	ERJ3GEYJ224V	S.M.CARB	0.1W	5%	220K Ω		
R1136	ERJ3GEYJ473V	S.M.CARB	0.1W	5%	47K Ω		
R1137	ERJ3GEYJ104V	S.M.CARB	0.1W	5%	100K Ω		
R1138	ERJ3GEYJ223V	S.M.CARB	0.1W	5%	22K Ω		
R1139	ERJ3GEYJ104V	S.M.CARB	0.1W	5%	100K Ω		
R1140	ERJ6GEYJ225	S.M.CARB	0.1W	5%	2M2 Ω		
R1141	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R1142	ERJ3GEYJ221	S.M.CARB	0.1W	5%	220 Ω		
R1144	ERJ3GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω		
R1145	ERJ3GEYJ331	S.M.CARB	0.1W	5%	330 Ω		
R1146	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω		
R1147	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R1148	ERJ3GEYJ273	S.M.CARB	0.1W	5%	27K Ω		
R1149	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω		
R1150	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω		
R1153	ERJ3GEYJ563V	S.M.CARB	0.1W	5%	56K Ω		
R1154	ERJ3GEYJ102	S.M.CARB	0.1W	5%	1K Ω		
R1155	ERJ3GEYJ223V	S.M.CARB	0.1W	5%	22K Ω		
R1156	ERJ3GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω		
R1157	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R1158	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R1160	ERJ3GEYJ182V	S.M.CARB	0.1W	5%	1K8 Ω		
R1161	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω		
R1162	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω		
R1163	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω		
R1164	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω		
R1166	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω		
R1168	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω		
R1169	ERJ3GEYOR00	S.M.CARB	0.1W	5%	0 Ω		
R1170	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω		
R1172	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω		
R1177	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω		
R1178	ERJ3GEYOR00	S.M.CARB	0.1W	5%	0 Ω		

Cct Ref	Parts Number	Description					
R1179	ERJ3GEYJ682	S.M.CARB	0.1W	5%	6K8 Ω		
R1180	ERJ3GEYJ392V	S.M.CARB	0.1W	5%	3K9 Ω		
R1181	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω		
R1188	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R1189	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R1190	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R1191	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R1192	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R1193	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R1194	ERJ3GEYJ220	S.M.CARB	0.1W	5%	22 Ω		
R1195	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R1196	EXB38V680JV	CHIP	0.063	5%	680 Ω	Δ	
R1202	EXB38V680JV	CHIP	0.063	5%	680 Ω	Δ	
R1205	EXB38V680JV	CHIP	0.063	5%	680 Ω	Δ	
R1209	EXB38V680JV	CHIP	0.063	5%	680 Ω	Δ	
R1214	EXB38V680JV	CHIP	0.063	5%	680 Ω	Δ	
R1217	EXB38V680JV	CHIP	0.063	5%	680 Ω	Δ	
R1221	EXB38V680JV	CHIP	0.063	5%	680 Ω	Δ	
R1225	EXB38V680JV	CHIP	0.063	5%	680 Ω	Δ	
R1232	EXB38V680JV	CHIP	0.063	5%	680 Ω	Δ	
R1233	EXB38V680JV	CHIP	0.063	5%	680 Ω	Δ	
R1236	EXB38V680JV	CHIP	0.063	5%	680 Ω	Δ	
R1239	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω		
R1240	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω		
R1241	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω		
R1242	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0 Ω		
R1243	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω		
R1249	ERJ3GEYOR00	S.M.CARB	0.1W	5%	0 Ω		
R1250	ERJ3GEYOR00	S.M.CARB	0.1W	5%	0 Ω		
R1251	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω		
R1253	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0 Ω		
R1255	ERJ3GEYJ392V	S.M.CARB	0.1W	5%	3K9 Ω		
R1256	ERJ3GEYJ473V	S.M.CARB	0.1W	5%	47K Ω		
R1257	ERJ3GEYOR00	S.M.CARB	0.1W	5%	0 Ω		
R1258	ERJ3GEYJ223V	S.M.CARB	0.1W	5%	22K Ω		
R1264	ERJ3GEYJ471	S.M.CARB	0.1W	5%	470 Ω		
R1293	ERJ6ENF3901	S.M.CARB	0.1W	1%	3K9 Ω		
R1294	ERJ6ENF3901	S.M.CARB	0.1W	1%	3K9 Ω		
R1317	ERJ3GEYOR00	S.M.CARB	0.1W	5%	0 Ω		
R1340	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω		
R1341	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω		
R1411	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω		
R1413	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω		
R1423	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω		
R1434	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0 Ω		
R1435	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0 Ω		
R1438	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω		
R1439	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R1446	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω		
R1457	ERJ6GEYJ224	S.M.CARB	0.1W	5%	220K Ω		
R1458	ERJ6ENF6201V	S.M.CARB	0.1W	1%	6K2 Ω		
R1459	ERJ6ENF4751	S.M.CARB	0.1W	1%	4K75 Ω		
R1460	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω		
R1473	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω		
R1474	ERJ6GEYJ274	S.M.CARB	0.1W	5%	270K Ω		
R1482	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω		
R1529	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10 Ω		
R1531	ERJ6GEYJ222	S.M.CARB	0.1W	5%	10 Ω		
R1543	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10 Ω		
R2004	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω		
R2006	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω		
R2007	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω		
R2008	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω		
R2015	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω		
R2019	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω		
R2025	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω		

Cct Ref	Parts Number	Description				
R2026	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω	
R2030	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R2031	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R2033	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0 Ω	
R2034	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0 Ω	
R2035	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0 Ω	
R2036	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0 Ω	
R2039	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R2040	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R2041	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2042	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R2043	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2044	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2050	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R2051	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R2052	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2251	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R2252	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R2253	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω	
R2254	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω	
R2255	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R2256	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω	
R2257	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω	
R2258	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R2301	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2303	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0 Ω	
R2304	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2305	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R2306	ERJ6ENF5232	S.M.CARB	0.1W	1%	52K3 Ω	
R2307	ERJ6ENF4701	S.M.CARB	0.1W	1%	4K7 Ω	
R2308	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15K Ω	
R2309	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω	
R2310	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R2311	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9 Ω	
R2312	ERJ6GEYJ134	S.M.CARB	0.1W	5%	130K Ω	
R2315	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R2316	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5 Ω	
R2317	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2318	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0 Ω	
R2319	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω	
R2321	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω	
R2322	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω	
R2323	ERJ6ENF4701	S.M.CARB	0.1W	1%	4K7 Ω	
R2324	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0 Ω	
R2325	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0 Ω	
R2326	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0 Ω	
R2327	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2328	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5 Ω	
R2329	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9 Ω	
R2330	ERD25TJ101	CARBON	0.25W	5%	100 Ω	
R2331	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R2332	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R2334	ERJ6ENF5232	S.M.CARB	0.1W	1%	52K3 Ω	
R2335	ERJ6ENF6802V	S.M.CARB	0.1W	1%	68K Ω	
R2336	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2337	ERJ6ENF1202	S.M.CARB	0.1W	1%	1K2 Ω	
R2338	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω	
R2339	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω	
R2340	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2341	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2342	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2345	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω	
R2346	ERJ6GEYJ303	S.M.CARB	0.1W	5%	30K Ω	
R2348	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω	
R2349	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω	
R2350	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω	

Cct Ref	Parts Number	Description				
R2442	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K	Q
R2443	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470	Q
R2444	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K	Q
R2447	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K	Q
R2448	ERJ6GEYJ182	S.M.CARB	0.1W	5%	1K8	Q
R2449	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K	Q
R2450	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9	Q
R2451	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K	Q
R2452	ERJ6GEYJ182	S.M.CARB	0.1W	5%	1K8	Q
R2454	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0	Q
R2455	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0	Q
R2456	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0	Q
R2458	ERX12SJ1R0	METAL	0.5W	5%	1	Q
R2459	ERX12SJ1R0	METAL	0.5W	5%	1	Q
R2460	ERX12SJ1R0	METAL	0.5W	5%	1	Q
R2461	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100	Q
R2463	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75	Q
R2464	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560	Q
R2465	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150	Q
R2466	ERJ6GEYJ154	S.M.CARB	0.1W	5%	150K	Q
R2467	ERJ6GEYJ154	S.M.CARB	0.1W	5%	150K	Q
R2468	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150	Q
R2469	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560	Q
R2470	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39K	Q
R2471	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39K	Q
R2472	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2	Q
R2473	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2	Q
R2474	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150	Q
R2475	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5	Q
R2476	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5	Q
R2477	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150	Q
R2478	ERJ6GEYJ154	S.M.CARB	0.1W	5%	150K	Q
R2479	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2	Q
R2480	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2	Q
R2481	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K	Q
R2482	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7	Q
R2487	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K	Q
R2488	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220	Q
R2489	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18K	Q
R2490	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K	Q
R2491	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K	Q
R2492	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K	Q
R2495	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K	Q
R2496	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K	Q
R2497	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K	Q
R2498	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0	Q
R2499	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K	Q
R2502	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K	Q
R2550	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820	Q
R2551	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K	Q
R2552	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820	Q
R2553	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K	Q
R2554	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820	Q
R2555	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K	Q
R2556	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820	Q
R2557	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K	Q
R2558	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820	Q
R2559	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K	Q
R2560	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820	Q
R2561	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K	Q
R2568	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0	Q
R2569	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0	Q
R2570	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0	Q
R2571	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0	Q
R2572	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0	Q
R2573	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0	Q

Cct Ref	Parts Number	Description				
R2623	ERJ6GEYJ334	S.M.CARB	0.1W	5%	330K	Q
R2624	ERJ6GEYJ105	S.M.CARB	0.1W	5%	1M	Q
R2625	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K	Q
R2626	ERJ6GEYJ334	S.M.CARB	0.1W	5%	330K	Q
R2627	ERJ6GEYJ105	S.M.CARB	0.1W	5%	1M	Q
R2628	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K	Q
R2629	ERJ6GEYJ334	S.M.CARB	0.1W	5%	330K	Q
R2630	ERJ6GEYJ105	S.M.CARB	0.1W	5%	1M	Q
R2631	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K	Q
R2632	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K	Q
R2633	ERJ6GEYJ224	S.M.CARB	0.1W	5%	220K	Q
R2717	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K	Q
R2718	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K	Q
R2719	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0	Q
R2720	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K	Q
R2723	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3	Q
R2724	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K	Q
R2725	ERJ6ENF1301	S.M.CARB	0.1W	1%	1K3	Q
R2726	ERJ6ENF4121	S.M.CARB	0.1W	1%	4K12	Q
R2727	ERJ6ENF2151	S.M.CARB	0.1W	1%	2K15	Q
R2728	ERJ6ENF1201	S.M.CARB	0.1W	1%	1K2	Q
R2731	ERJ6ENF2151	S.M.CARB	0.1W	1%	2K15	Q
R2732	ERJ6ENF1201	S.M.CARB	0.1W	1%	1K2	Q
R3001	ERJ6GEYJ680	S.M.CARB	0.125W	5%	68	Q
R3002	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K	Q
R3003	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220	Q
R3004	ERJ6GEYJ680	S.M.CARB	0.125W	5%	68	Q
R3005	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K	Q
R3006	ERJ6GEYJ680	S.M.CARB	0.125W	5%	68	Q
R3007	ERJ6GEYJ680	S.M.CARB	0.125W	5%	68	Q
R3008	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K	Q
R3009	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3	Q
R3010	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220	Q
R3012	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220	Q
R3013	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220	Q
R3014	ERJ6ENF75R0	S.M.CARB	0.1W	1%	75	Q
R3015	ERJ6GEYJ184	S.M.CARB	0.1W	5%	180K	Q
R3017	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220	Q
R3018	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220	Q
R3019	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220	Q
R3020	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220	Q
R3021	ERJ6GEYJ184	S.M.CARB	0.1W	5%	180K	Q
R3022	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220	Q
R3023	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220	Q
R3025	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220	Q
R3026	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220	Q
R3027	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220	Q
R3028	ERJ6ENF75R0	S.M.CARB	0.1W	1%	75	Q
R3029	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0	Q
R3030	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0	Q
R3031	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K	Q
R3034	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220	Q
R3035	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K	Q
R3036	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K	Q
R3037	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K	Q
R3044	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330	Q
R3049	ERJ6ENF5600	S.M.CARB	0.1W	1%	560	Q
R3050	ERJ6ENF5600	S.M.CARB	0.1W	1%	560	Q
R3051	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560	Q
R3053	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220	Q
R3054	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330	Q
R3059	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560	Q
R3062	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330	Q
R3064	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0	Q
R3066	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0	Q
R3069	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0	Q

Cct Ref	Parts Number	Description				
R3071	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220	Q
R3073	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330	Q
R3074	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100	Q
R3076	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K	Q
R3077	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6	Q
R3078	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6	Q
R3079	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6	Q
R3084	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6	Q
R3085	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6	Q
R3086	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6	Q
R3087	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6	Q
R3088	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6	Q
R3089	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6	Q
R3090	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6	Q
R3116	ERD25TJ103	CARBON	0.25W	5%	10K	Q
R3122	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K	Q
R3123	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K	Q
R3124	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680	Q
R3125	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100	Q
R3126	ERJ6GEYJ121	S.M.CARB	0.1W	5%	120	Q
R3127	ERJ6GEYJ390	S.M.CARB	0.1W	5%	39	Q
R3128	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330	Q
R3129	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560	Q
R3130	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560	Q
R3326	ERJ6ENF2202	S.M.CARB	0.1W	1%	22K	Q
R3401	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100	Q
R3402	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K	Q
R3403	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100	Q
R3404	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K	Q
R3405	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K	Q
R3406	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K	Q
R3407	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K	Q
R3408	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K	Q
R3409	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100	Q
R3410	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100	Q
R3411	ERJ6ENF75R0	S.M.CARB	0.1W	1%	75	Q
R3412	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K	Q
R3413	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100	Q
R3414	ERJ6ENF75R0	S.M.CARB	0.1W	1%	75	Q
R3415	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100	Q
R3416	ERJ6ENF75R0	S.M.CARB	0.1W	1%	75	Q
R3417	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75	Q
R3418	ERJ6ENF75R0	S.M.CARB	0.1W	1%	75	Q
R3419	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K	Q
R3420	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K	Q
R3421	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K	Q
R3422	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K	Q
R3423	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100	Q
R3424	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100	Q
R3425	ERJ6ENF75R0	S.M.CARB	0.1W	1%	75	Q
R3426	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K	Q
R3427	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100	Q
R3428	ERJ6ENF75R0	S.M.CARB	0.1W	1%	75	Q
R3429	ERJ6ENF75R0	S.M.CARB	0.1W	1%	75	Q
R3430	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75	Q
R3431	ERJ6ENF75R0	S.M.CARB	0.1W	1%	75	Q
R3432	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K	Q
R3433	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K	Q
R3434	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K	Q
R3435	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K	Q
R3436	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100	Q
R3437	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100	Q
R3438	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K	Q
R3439	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75	Q
R3440	ERJ6ENF75R0	S.M.CARB	0.1W	1%	75	Q
R3441	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K	Q

Cct Ref	Parts Number	Description		
C376	ECKC2H122J	CERAMIC	500V	1.2μF
C377	ECA2EM100B	ELECT	250V	10μF
C380	ECEA1HU101	ELECT	50V	100pF
C382	ECA1CM221GB	ELECT	16V	220pF
C383	ECA1CM222GB	ELECT	16V	2200pF
C388	ECJ2VB1H183K	CERAMIC	50V	18nF
C390	ECA1HM100GB	ELECT	50V	10μF
C391	ECKC3D332J	CERAMIC	2KV	3.3pF
C450	ECA1VM102GB	ELECT	35V	1nF
C451	ECA1VM470B	ELECT	35V	47μF
C452	ECEA1HU471	ELECT	50V	470pF
C455	ECEA1CN220	ELECT	16V	22μF
C457	ECA1VHG102B	ELECT	35V	1pF
C459	ECA1HM100GB	ELECT	50V	10μF
C460	ECOB1224KFW	FILM	100V	220nF
C462	ECQV1H104J	FILM	50V	100nF
C463	ECJ2VF1H103Z	CERAMIC	50V	10nF
C473	ECQV1H104J	FILM	50V	100nF
C474	ECJ2VF1H103Z	CERAMIC	50V	10nF
C475	ECJ2VC1H220J	CERAMIC	50V	22pF
C476	ECHS1H102FZ3	FILM	100V	100nF
C482	ECA1CM102B	ELECT	16V	1000pF
C490	ECJ2VF1H103Z	CERAMIC	50V	10nF
C504	ECA1VM101GB	ELECT	35V	100pF
C505	ECQV1H104J	FILM	50V	100nF
C508	ECA1EM102GB	ELECT	25V	100pF
C510	ECJ2VF1C104Z	CERAMIC	16V	470nF
C521	ECKC3A152J	CERAMIC	1KV	1500pF
C522	ECKC3A272J	CERAMIC	1KV	2.7μF
C523	ECKC3A151J	CERAMIC	1KV	150pF
C524	ECQM6223JZW	FILM	600V	22nF
C525	ECQM4223JZW	FILM	400V	22nF
C526	ECKC3D101J	CERAMIC	2KV	100pF
C527	ECA1HM010GB	ELECT	50V	1pF
C528	ECKC3D471JB	CERAMIC	2KV	470pF
C529	ECA1HM100GB	ELECT	50V	10μF
C530	ECKC3A681J	CERAMIC	1KV	680pF
C531	ECKC3D102J	CERAMIC	2KV	1nF
C551	ECKC3A821J	CERAMIC	1KV	820pF
C554	ECKC3D561J	CERAMIC	2KV	560pF
C555	ECQP1223JZW	FILM	100V	22nF
C556	ECWH20102JVY	FILM	200V	1pF
C558	ECWH20562JVB	FILM	200V	5.6nF
C559	ECQF4103JZH	FILM	400V	10nF
C560	ECEA2CNR47SB	ELECT	160V	0.47μF
C561	ECWH20562JVB	FILM	200V	5.6nF
C562	ECQF4822JZH	FILM	400V	8.2nF
C565	ECQE2155JFB	FILM	250V	1.5μF
C569	ECA2EM330B	ELECT	250V	33μF
C571	ECKC1H472J	CERAMIC	50V	4.7nF
C573	ECQM4223JZW	FILM	400V	22nF
C576	ECKC3A182J	CERAMIC	1KV	1800pF
C577	ECWFF4304JBP	FILM	400V	300nF
C578	ECWFF4334JBB	FILM	400V	330nF
C579	ECWFF4564JBB	FILM	400V	560nF
C580	ECWFF4684JBB	FILM	400V	680nF
C583	ECQB1H223K	FILM	50V	22nF
C584	ECKC3D681J	CERAMIC	2KV	680pF
C585	ECKC3D681J	CERAMIC	2KV	680pF
C591	ECA1HM100GB	ELECT	50V	10μF
C705	ECQM2562JZB	FILM	200V	5.6μF
C708	ECQE2334KFB	FILM	200V	330nF
C709	ECQE1335KFB	FILM	100V	3.3pF
C710	ECQE1335KFB	FILM	100V	3.3pF
C711	ECQE1335KFB	FILM	100V	3.3pF
C715	ECKC3D271J	CERAMIC	2KV	270pF

Cct Ref	Parts Number	Description		
C801	ECKRAE4722E	CERAMIC	10V	4.7μF
C802	ECKRAE4722E	CERAMIC	10V	4.7μF
C803	ECKRAE4722E	CERAMIC	10V	4.7μF
C804	ECKRAE4722E	CERAMIC	10V	4.7μF
C808	ECA1VHG221B	ELECT	35V	220pF
C817	ECKC3D681J	CERAMIC	2KV	680pF
C819	ECKC2H471J	CERAMIC	500V	470pF
C820	ECOS2GP471DB	ELECT	200V	470pF
C823	ECQF4123JZH	FILM	400V	12nF
C824	ECQE6823KFB	FILM	600V	82nF
C828	ECKC3D152J	CERAMIC	2KV	1.5nF
C829	ECQB1H681JF3	FILM	50V	680pF
C831	ECKCNA471MB8	CERAMIC	10V	47μF
C841	ECKRAE4722E	CERAMIC	10V	4.7μF
C843	ECQV1H104J	FILM	50V	100nF
C844	ECKC3D392J	CERAMIC	2KV	3900pF
C845	ECKC1H101J	CERAMIC	50V	100pF
C847	ECA2WM100E	ELECT	450V	10μF
C851	ECQB1H104JF3	FILM	100V	100nF
C852	ECQB1H104JF3	FILM	100V	100nF
C853	ECEA1HU102	ELECT	50V	1000μF
C854	ECKC2H561J	CERAMIC	500V	560pF
C855	ECQB1H103J	FILM	50V	10nF
C858	ECKC3D182JB	CERAMIC	2KV	1.8nF
C861	ECA1EHG331B	ELECT	50V	330pF
C862	ECA1EHG222B	ELECT	50V	2.2pF
C864	ECA1EM222GB	ELECT	25V	2200μF
C865	ECA1EM222GB	ELECT	25V	2200μF
C866	ECOS2CA561B8	ELECT	160V	560μF
C868	ECA160V33UB	ELECT	160V	33μF
C869	ECA1EM472E	ELECT	50V	4.7pF
C871	ECA1HMG100B	ELECT	50V	10μF
C883	ECA1HM100GB	ELECT	50V	10μF
C885	ECA1VM470B	ELECT	35V	47μF
C888	ECA1CM471GB	ELECT	16V	470μF
C889	ECA1CM222GB	ELECT	16V	2200μF
C892	ECQU2A224MN	FILM	250V	220nF
C893	ECQU2A224MN	FILM	250V	220nF
C894	ECQU2A683MNB	FILM	100V	68nF
C895	ECKCNA152ME7	CERAMIC	10V	1.5μF
C897	ECKCNA152ME7	CERAMIC	10V	1.5μF
C898	ECQU2A224MN	FILM	250V	220nF
C899	ECQU2A224MN	FILM	250V	220nF
C901	EEANA1E100B	CERAMIC	25V	10μF
C902	ECA1HM101GB	ELECT	50V	100μF
C905	ECA1VM101GB	ELECT	35V	100μF
C907	ECJ2VC1H151J	CERAMIC	50V	150pF
C955	ECQB1103J	FILM	100V	10nF
C958	ECA2CM100B	ELECT	160V	10μF
C959	ECQB1103J	FILM	100V	10nF
C960	ECJ2VC1H221J	CERAMIC	50V	220pF
C961	ECA2CM100B	ELECT	160V	10μF
C962	ECQM4472RJZ	FILM	400V	4.7μF
C963	ECJ2VC1H221J	CERAMIC	50V	220pF
C964	ECA1CHG101	ELECT	16V	100μF
C966	ECA1HM101GB	ELECT	50V	100μF
C967	ECA1CHG471B	ELECT	16V	470μF
C974	ECA1VM101GB	ELECT	35V	100μF
C1040	ECQB1H223K	FILM	50V	22nF
C1041	ECA1HM470GB	ELECT	50V	47μF
C1043	ECKC1H101J	CERAMIC	50V	100pF
C1101	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1102	EEVHB0J101P	CERAMIC	10V	100pF
C1103	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1104	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1105	ECJ2VF1C104Z	CERAMIC	16V	470nF

Cct Ref	Parts Number	Description		
C1108	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1107	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1108	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1109	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1112	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1115	ECJ2VB1C104K	CERAMIC	16V	100nF
C1116	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1117	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1118	ECJ2VB1H472K	CERAMIC	50V	4.7nF
C1119	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1120	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1121	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1122	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1123	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1124	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1125	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1126	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1127	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1128	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1129	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1130	EEVHB0G221P	CERAMIC	16V	220pF
C1131	ECJ2VC1H220J	CERAMIC	50V	22pF
C1132	ECJ2VC1H220J	CERAMIC	50V	22pF
C1133	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1134	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1135	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1136	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1137	EEVHB0G221P	CERAMIC	16V	220pF
C1138	ECJ2VC1H221J	CERAMIC	50V	220pF
C1139	ECJ2VC1H221J	CERAMIC	50V	220pF
C1140	ECJ2VB1E104K	CERAMIC	25V	100nF
C1142	ECJ2VC1H151J	CERAMIC	50V	150pF
C1144	ECJ2VC1H101J	CERAMIC	50V	100pF
C1146	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1147	ECA1CM471GB	ELECT	16V	470μF
C1148	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1150	ECJ2VB1C104K	CERAMIC	16V	100nF
C1151	ECJ2VB1C104K	CERAMIC	16V	100nF
C1152	ECJ2VB1H103K	CERAMIC	50V	10nF
C1153	ECJ2VB1H103K	CERAMIC	50V	10nF
C1154	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1156	ECA1HM100GB	ELECT	50V	10μF
C1157	TACCN0J335KT	CERAMIC	6.3V	3.3pF
C1158	TACCN0J335KT	CERAMIC	6.3V	3.3pF
C1159	EEVHB1C100R	CERAMIC	16V	10pF
C1160	EEVHB1C100R	CERAMIC	16V	10pF
C1161	EEVHB0G221P	CERAMIC	16V	220pF
C1162	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1163	EEVHB0J101P	CERAMIC	10V	100pF
C1164	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1165	ECJ2VF1C105Z	CERAMIC	16V	1pF
C1166	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1167	EEVHB1C101P	CERAMIC	16V	100pF
C1168	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1170	ECEA1EKN100B	ELECT	50V	10μF
C1251	ECA1HM101GB	ELECT	50V	100μF
C1252	ECA1HM100GB	ELECT	50V	10μF
C1253	ECJ2VB1C104K	CERAMIC	16V	100nF
C1254	ECJ2VB1C104K	CERAMIC	16V	100nF
C1255	ECA1HM100GB	ELECT	50V	10μF
C1290	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1292	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1293	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1294	ECA1HM101GB	ELECT	50V	100μF
C1295	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1296	ECA0JM471GB	ELECT	6.3V	470μF

Cct Ref	Parts Number	Description		
C1405	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1455	ECJ2VB1C104K	CERAMIC	16V	100nF
C1456	ECJ2VB1C104K	CERAMIC	16V	100nF
C1457	ECJ2VB1C104K	CERAMIC	16V	100nF
C1459	ECJ3VB1C474K	CERAMIC	16V	470nF
C1474	ECJ2VB1C104K	CERAMIC	16V	100nF
C1475	ECJ2VB1C104K	CERAMIC	16V	100nF
C1477	ECJ2VB1C104K	CERAMIC	16V	100nF
C1509	ECA1HM100GB	ELECT	50V	10μF
C1510	ECJ2VB1C104K	CERAMIC	16V	100nF
C1511	ECJ2VB1C104K	CERAMIC	16V	100nF
C1513	ECJ2VB1C104K	CERAMIC	16V	100nF
C1514	ECJ2VB1C104K	CERAMIC	16V	100nF
C1515	ECJ2VB1C104K	CERAMIC	16V	100nF
C1516	ECJ2VB1C104K	CERAMIC	16V	100nF
C1544	ECA1HM101GB	ELECT	50V	100μF
C1550	ECA1HM101GB	ELECT	50V	100μF
C1551	ECA1HM101GB	ELECT	50V	100μF
C1563	ECA1CM470GB	ELECT	16V	47μF
C1564	ECA1HMR7GB	ELECT	50V	4.7μF
C1565	ECA1HMR7GB	ELECT	50V	4.7μF
C1566	ECA1HM220GB	ELECT	50V	22μF
C2007	ECJ2VC1H560J	CERAMIC	50V	56pF
C2008	ECJ2VC1H470J	CERAMIC	50V	47pF
C2009	ECJ2VC1H470J	CERAMIC	50V	47pF
C2010	ECJ2VC1H560J	CERAMIC	50V	56pF
C2011	ECJ2VC1H070D	CERAMIC	50V	7pF
C2014	ECJ2VC1H010Z	CERAMIC	50V	1pF
C2015	ECJ2VF1C104Z	CERAMIC	16V	470nF
C2016	ECA1HM101GB	ELECT	50V	100μF
C2017	ECJ2VC1H010Z	CERAMIC	50V	1pF
C2022	TACCN0J105KT	CERAMIC	6.3V	1pF
C2023	TACCN0J105KT	CERAMIC	6.3V	1pF
C2024	ECJ3VB1C474K	CERAMIC	16V	470nF
C2025	ECJ2VF1C104Z	CERAMIC	16V	470nF
C2027	ECA1HM100GB	ELECT	50V	10μF
C2028	ECJ2VF1C104Z	CERAMIC	16V	470nF
C2030	ECJ2VF1C104Z	CERAMIC	16V	470nF
C2031	ECA1HM101GB	ELECT	50V	100μF
C2032	TACCN0J105KT	CERAMIC	6.3V	1pF
C2033	ECA1HM100GB	ELECT	50V	10μF
C2034	ECJ2VF1H103Z	CERAMIC	50V	10μF
C2035	ECJ2VF1H103Z	CERAMIC	50V	10nF
C2036	ECJ2VF1H103Z	CERAMIC	50V	10nF
C2037	TACCN0J105KT	CERAMIC	6.3V	1pF
C2038	ECA1HM100GB	ELECT	50V	10μF
C2039	ECA1HM101GB	ELECT	50V	100μF
C2040	ECJ2VF1C104Z	CERAMIC	16V	470nF
C2041	ECA1HMR3GB	ELECT	50V	33μF
C2042	ECJ2VB1H102K	CERAMIC	50V	1nF
C2043	ECJ2VB1H102K	CERAMIC	50V	1nF
C2044	ECJ2VB1H102K	CERAMIC	50V	1nF
C2045	ECJ2VB1H102K	CERAMIC	50V	1nF
C2047	ECJ2VF1H103Z	CERAMIC	50V	10nF
C2222	ECEA1HKA100	ELECT	50V	10pF
C2223	ECEA1HKA100	ELECT	50V	10pF
C2224	ECEA1HKA100	ELECT	50V	10pF
C2225	ECEA1HKA100	ELECT	50V	10pF
C2226	ECEA1HKA100	ELECT	50V	10pF
C2227	ECEA1HKA100	ELECT	50V	10pF
C2301	ECA1VMG222E	ELECT	35V	2.2pF
C2302	ECQV1H684J	FILM	50V	680nF
C2303	ECJ3VB1H104K	CERAMIC	3.5KV	100nF
C2304	ECA1VM222GE	ELECT	35V	2200μF
C2305	ECJ2VB1H333K	CERAMIC	50V	33nF
C2306	ECJ2VB1H561K	CERAMIC	50V	56pF

Cct Ref	Parts Number	Description		
C2307	ECJ2VB1H471K	CERAMIC	50V	470pF
C2308	ECJ2VC1H270J	CERAMIC	50V	27pF
C2309	ECJ2VB1H471K	CERAMIC	50V	470pF
C2310	ECJ2VB1H331K	CERAMIC	50V	330nF
C2311	ECEA1HNR33	ELECT	50V	330pF
C2312	ECJ3VB1H104K	CERAMIC	3.5KV	100nF
C2313	ECJ2VB1H103K	CERAMIC	50V	10nF
C2314	ECJ2VB1H331K	CERAMIC	50V	330nF
C2315	ECJ3VB1H104K	CERAMIC	3.5KV	100nF
C2316	ECJ2VB1H471K	CERAMIC	50V	470pF
C2317	ECA1HMR7GB	ELECT	50V	4.7uF
C2318	ECEA1HNR33	ELECT	50V	330pF
C2319	ECJ2VB1H102K	CERAMIC	50V	1nF
C2320	ECJ2VB1H681K	CERAMIC	50V	680pF
C2321	ECA1CM471GB	ELECT	16V	470pF
C2322	ECJ2VB1H471K	CERAMIC	50V	470pF
C2323	ECQV1H684J	FILM	50V	680nF
C2324	ECJ2VB1H103K	CERAMIC	50V	10nF
C2325	ECA1HMR7GB	ELECT	50V	4.7uF
C2326	ECA1HM101GB	ELECT	50V	100uF
C2327	ECJ2VB1H102K	CERAMIC	50V	1nF
C2328	ECA1HM101GB	ELECT	50V	100uF
C2329	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2330	ECJ2VB1H561K	CERAMIC	50V	560pF
C2331	ECJ3VB1H104K	CERAMIC	3.5KV	100nF
C2332	ECJ2VB1H104K	CERAMIC	50V	100nF
C2333	ECJ2VB1H333K	CERAMIC	50V	33nF
C2334	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2335	ECJ2VC1H101J	CERAMIC	50V	100pF
C2336	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2337	ECA1CM470GB	ELECT	16V	47uF
C2338	ECEA1HU221	ELECT	50V	220uF
C2339	ECEA1HU221	ELECT	50V	220uF
C2340	ECA1HM101GB	ELECT	50V	100uF
C2341	ECA1HM330B	ELECT	50V	33uF
C2342	ECA1HM101GB	ELECT	50V	100uF
C2343	ECA1HM100GB	ELECT	50V	10uF
C2344	ECJ2VB1H472K	CERAMIC	50V	4.7nF
C2345	ECJ2VB1H472K	CERAMIC	50V	4.7nF
C2346	ECJ2VC1H101J	CERAMIC	50V	100pF
C2347	EEUFC1H102E	CERAMIC	50V	1uF
C2348	ECJ2VB1H681K	CERAMIC	50V	680pF
C2350	ECJ2VB1H471K	CERAMIC	50V	470pF
C2352	ECEA1HN2R2UB	ELECT	50V	2.2uF
C2353	ECJ2VB1E563K	CERAMIC	25V	56nF
C2357	ECQV1H154J	FILM	50V	150nF
C2359	ECJ2VB1E563K	CERAMIC	25V	56nF
C2360	ECJ2VB1E563K	CERAMIC	25V	56nF
C2361	ECJ2VB1H102K	CERAMIC	50V	1nF
C2362	ECJ2VB1H332K	CERAMIC	50V	3.3nF
C2363	ECQV1H684J	FILM	50V	680nF
C2365	ECA1HM330B	ELECT	50V	33uF
C2366	EEANA1E1R0B	CERAMIC	35V	0R1uF
C2367	ECJ2VC1H561J	CERAMIC	50V	560pF
C2368	ECJ3VB1H104K	CERAMIC	3.5KV	100nF
C2369	ECJ2VB1H103K	CERAMIC	50V	10nF
C2370	ECA1HM100GB	ELECT	50V	10uF
C2372	ECEA1CN100	ELECT	16V	10uF
C2373	ECJ2VB1H102K	CERAMIC	50V	1nF
C2374	ECJ2VB1H102K	CERAMIC	50V	1nF
C2375	ECJ2VB1H102K	CERAMIC	50V	1nF
C2376	ECJ2VF1C104Z	CERAMIC	16V	470nF
C2377	ECJ2VB1H102K	CERAMIC	50V	1nF
C2378	ECA0JM222GB	ELECT	6.3V	2.2nF
C2380	ECJ2VB1H472K	CERAMIC	50V	4.7nF
C2383	ECJ2VC1H101J	CERAMIC	50V	100pF

Cct Ref	Parts Number	Description		
C2386	ECJ2VB1H681K	CERAMIC	50V	680pF
C2387	ECJ3VB1H104K	CERAMIC	3.5KV	100nF
C2388	ECJ2VB1E563K	CERAMIC	25V	56nF
C2390	ECQV1H334JL3	FILM	50V	330nF
C2391	ECJ2VB1E563K	CERAMIC	25V	56nF
C2392	ECJ2VB1E563K	CERAMIC	25V	56nF
C2393	ECJ2VB1H562K	CERAMIC	50V	5.6nF
C2394	ECJ2VB1H102K	CERAMIC	50V	1nF
C2395	ECJ2VB1H332K	CERAMIC	50V	3.3nF
C2396	ECA1HMR2GB	ELECT	50V	2.2uF
C2397	EEANA1E1R0B	CERAMIC	35V	0R1uF
C2398	ECA1CM102B	ELECT	16V	1000uF
C2399	ECJ2VB1H103K	CERAMIC	50V	10nF
C2400	ECA1VHG221B	ELECT	35V	220uF
C2401	ECOS2GA101B8	ELECT	400V	100uF
C2402	ECA1CM221GB	ELECT	16V	220uF
C2403	ECKC3D471JB	CERAMIC	2KV	470pF
C2404	ECA1CM221GB	ELECT	16V	220uF
C2405	ECQV1H333J	FILM	50V	33nF
C2408	ECQV1H683K	FILM	50V	68nF
C2407	ECKC2H103J	CERAMIC	50V	10nF
C2416	ECQV1H104J	FILM	50V	100nF
C2417	ECKC2H471J	CERAMIC	500V	470pF
C2418	ECKC2H471J	CERAMIC	500V	470pF
C2419	EEUFC1E331B	CERAMIC	25V	330pF
C2420	ECA1HHG102E	ELECT	50V	1nF
C2421	ECA1VM102GE	ELECT	35V	1nF
C2422	ECA1VM102GE	ELECT	35V	1nF
C2423	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2424	ECEA1CN100	ELECT	16V	10uF
C2425	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2426	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2427	ECQV1H474JZ	FILM	50V	470nF
C2428	ECQV1H474JZ	FILM	50V	470nF
C2429	ECQV1H474JZ	FILM	50V	470nF
C2432	ECJ2VF1C104Z	CERAMIC	16V	470nF
C2433	ECA1CM471GB	ELECT	16V	470uF
C2434	ECJ2VF1C104Z	CERAMIC	16V	470nF
C2436	ECJ2VB1H473K	CERAMIC	50V	47nF
C2437	ECJ2VB1H473K	CERAMIC	50V	47nF
C2438	ECJ2VB1H473K	CERAMIC	50V	47nF
C2444	ECJ2VB1H562K	CERAMIC	50V	5.6nF
C2446	ECJ2VC1H561J	CERAMIC	50V	560pF
C2447	ECJ2VB1H223K	CERAMIC	50V	2.2nF
C2448	ECJ2VB1H562K	CERAMIC	50V	5.6nF
C2449	ECJ2VC1H561J	CERAMIC	50V	560pF
C2450	ECJ2VC1H561J	CERAMIC	50V	560pF
C2452	ECA1HM330B	ELECT	50V	33uF
C2453	ECA1HM330B	ELECT	50V	33uF
C2454	ECA1HM330B	ELECT	50V	33uF
C2456	ECJ2VF1H103Z	CERAMIC	50V	10nF
C2457	ECJ2VF1H103Z	CERAMIC	50V	10nF
C2458	ECJ2VF1H103Z	CERAMIC	50V	10nF
C2460	ECEA1HU101	ELECT	50V	100uF
C2461	ECEA1HU101	ELECT	50V	100uF
C2462	ECEA1HU101	ELECT	50V	100uF
C2464	ECJ2VB1H223K	CERAMIC	50V	22nF
C2465	ECJ2VB1H223K	CERAMIC	50V	22nF
C2466	ECJ2VB1H223K	CERAMIC	50V	22nF
C2471	ECA1HHG101B	ELECT	50V	100uF
C2472	ECEA1HU101	ELECT	50V	100uF
C2473	ECEA1HU101	ELECT	50V	100uF
C2474	ECEA1HU101	ELECT	50V	100uF
C2476	ECJ2VF1H103Z	CERAMIC	50V	10nF
C2477	ECJ2VF1H103Z	CERAMIC	50V	10nF
C2478	ECJ2VF1H103Z	CERAMIC	50V	10nF

Cct Ref	Parts Number	Description		
C2480	ECQV1H474JZ	FILM	50V	470nF
C2481	ECQV1H474JZ	FILM	50V	470nF
C2482	ECQV1H474JZ	FILM	50V	470nF
C2483	ECJ2VB1H102K	CERAMIC	50V	1nF
C2485	ECJ2VB1H102K	CERAMIC	50V	1nF
C2486	ECJ2VB1H102K	CERAMIC	50V	1nF
C2487	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2488	ECA1VM471GB	ELECT	35V	470uF
C2489	ECEA1HU221	ELECT	50V	220uF
C2490	ECJ2VB1H563K	CERAMIC	50V	56nF
C2491	ECJ2VB1H333K	CERAMIC	50V	33nF
C2492	ECJ2VB1H333K	CERAMIC	50V	33nF
C2493	ECJ2VB1H563K	CERAMIC	50V	56nF
C2494	ECJ2VB1E563K	CERAMIC	25V	56nF
C2495	ECJ2VB1H103K	CERAMIC	50V	10nF
C2496	ECJ2VC1H470J	CERAMIC	50V	47pF
C2497	ECJ2VF1H103Z	CERAMIC	50V	10nF
C2498	ECJ2VC1H220J	CERAMIC	50V	22pF
C2499	ECJ2VB1H471K	CERAMIC	50V	470pF
C2500	ECQV1H334JL3	FILM	50V	330nF
C2575	TACCN0J105KT	CERAMIC	6.3V	1uF
C2576	TACCN0J105KT	CERAMIC	6.3V	1uF
C2577	TACCN0J105KT	CERAMIC	6.3V	1uF
C2578	TACCN0J105KT	CERAMIC	6.3V	1uF
C2579	TACCN0J105KT	CERAMIC	6.3V	1uF
C2580	ECEA1CKA470	ELECT	16V	47uF
C2590	ECA1CM471GB	ELECT	16V	470uF
C2592	ECJ2VB1H823K	CERAMIC	50V	82nF
C2593	ECJ2VB1E333K	CERAMIC	25V	33nF
C2594	ECJ2VB1H823K	CERAMIC	50V	82nF
C2595	ECJ2VB1E333K	CERAMIC	25V	33nF
C2596	ECJ2VB1H822K	CERAMIC	50V	8.2nF
C2597	ECJ2VB1H822K	CERAMIC	50V	8.2nF
C2602	ECEA1HN010UB	ELECT	50V	1uF
C2603	ECEA1HN010UB	ELECT	50V	1uF
C2604	ECEA1HN010UB	ELECT	50V	1uF
C2610	ECA1CM471GB	ELECT	16V	470uF
C2702	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2703	ECJ2VF1C104Z	CERAMIC	16V	470nF
C2704	ECA1CM471GB	ELECT	16V	470uF
C2707	ECA1CHG471B	ELECT	16V	470uF
C2708	EEUFC1A471B	CERAMIC	10V	470pF
C2711	ECJ2VF1C104Z	CERAMIC	16V	470nF
C2713	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2715	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2716	EEUFC1A471B	CERAMIC	10V	470pF
C2719	ECA1CM471GB	ELECT	16V	470uF
C2720	ECA1CM471GB	ELECT	16V	470uF
C2722	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2723	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2726	ECA1EHG102B	ELECT	25V	1000uF
C2730	ECA1CM471GB	ELECT	16V	470uF
C2731	ECA1CM471GB	ELECT	16V	470uF
C2732	EEUFC1A471B	CERAMIC	10V	470pF
C2733	ECJ2VF1H104Z	CERAMIC	50V	100nF
C2734	ECA1EM471GB	ELECT	25V	470uF
C2737	ECA1CM471GB	ELECT	16V	470uF
C2740	ECA1CM471GB	ELECT	16V	470uF
C2750	TACCN0J105KT	CERAMIC	6.3V	1uF
C2751	TACCN0J105KT	CERAMIC	6.3V	1uF
C3001	ECJ2VF1C104Z	CERAMIC	16V	470nF
C3003	ECEA1CN470	ELECT	16V	47uF
C3008	ECJ2VF1C104Z	CERAMIC	16V	470nF
C3007	ECJ2VB1E473K	CERAMIC	25V	47nF
C3008	ECJ2VB1E473K	CERAMIC	25V	47nF
C3009	ECJ2VB1E473K	CERAMIC	25V	47nF

Cct Ref	Parts Number	Description		
C3010	ECJ2VB1E473K	CERAMIC	25V	47nF
C3011	ECJ2VB1E473K	CERAMIC	25V	47nF
C3012	ECJ2VB1E473K	CERAMIC	25V	47nF
C3013	TACCN0J105KT	CERAMIC	6.3V	1uF
C3014	TACCN0J105KT	CERAMIC	6.3V	1uF
C3015	TACCN0J105KT	CERAMIC	6.3V	1uF
C3016	TACCN0J105KT	CERAMIC	6.3V	1uF
C3017	TACCN0J105KT	CERAMIC	6.3V	1uF
C3018	ECJ2VB1C104K	CERAMIC	16V	100nF
C3020	TACCN0J105KT	CERAMIC	6.3V	1uF
C3021	ECJ2VB1C104K	CERAMIC	16V	100nF
C3024	TACCN0J105KT	CERAMIC	6.3V	1uF
C3026	TACCN0J105KT	CERAMIC	6.3V	1uF
C3027	TACCN0J105KT	CERAMIC	6.3V	1uF
C3028	TACCN0J105KT	CERAMIC	6.3V	1uF
C3029	TACCN0J105KT	CERAMIC	6.3V	1uF
C3032	TACCN0J105KT	CERAMIC	6.3V	1uF
C3033	TACCN0J105KT	CERAMIC	6.3V	1uF
C3034	ECJ2VF1C104Z	CERAMIC	16V	470nF
C3035	ECA1HM101GB	ELECT	50V	100uF
C3043	TACCN0J105KT	CERAMIC	6.3V	1uF
C3044	TACCN0J105KT	CERAMIC	6.3V	1uF
C3045	TACCN0J105KT	CERAMIC	6.3V	1uF
C3046	ECA1HM101GB	ELECT	50V	100uF
C3047	TACCN0J105KT	CERAMIC	6.3V	1uF
C3048	TACCN0J105KT	CERAMIC	6.3V	1uF
C3049	TACCN0J105KT	CERAMIC	6.3V	1uF
C3050	ECA1CM221GB	ELECT	16V	220uF
C3051	TACCN0J105KT	CERAMIC	6.3V	1uF
C3053	ECA1HM100GB	ELECT	50V	10uF
C3054	ECA1HM100GB	ELECT	50V	10uF
C3055	ECEA1HN100UB	ELECT	50V	10uF
C3056	ECEA1HN100UB	ELECT	50V	10uF
C3057	TACCN0J105KT	CERAMIC	6.3V	1uF
C3058	TACCN0J105KT	CERAMIC	6.3V	1uF
C3065	TACCN0J105KT	CERAMIC	6.3V	1uF
C3066	TACCN0J105KT	CERAMIC	6.3V	1uF
C3068	TACCN0J105KT	CERAMIC	6.3V	1uF
C3071	ECJ2VC1H101J	CERAMIC	50V	100pF
C3072	ECJ2VC1H101J	CERAMIC	50V	100pF
C3073	ECJ2VC1H101J	CERAMIC	50V	100pF
C3077	ECJ2VF1C104Z	CERAMIC	16V	470nF
C3078	ECJ2VF1C104Z	CERAMIC	16V	470nF
C3079	ECEA1CN470	ELECT	16V	47uF
C3101	ECQB1H333J	FILM	50V	33nF
C3102	ECQB1H333J	FILM	50V	33nF
C3107	ECKC1H561J	CERAMIC	50V	560pF
C3109	ECKC1H561J	CERAMIC	50V	560pF
C3111	ECKC1H103J	CERAMIC	50V	100uF
C3112	ECJ2VC1H680J	CERAMIC	50V	68pF
C3113	ECA1CM470GB	ELECT	16V	47uF
C3114	ECEA1CKA470	ELECT	16V	47uF
C3115	ECEA1CN470	ELECT	16V	47uF
C3301	ECJ2VF1C104Z	CERAMIC	16V	470nF
C3302	ECJ2VF1C104Z	CERAMIC	16V	470nF
C3303	ECJ2VF1C104Z	CERAMIC	16V	470nF
C3322	ECJ2VC1H471J	CERAMIC	50V	470pF
C3323	ECA1HHG100B	ELECT	50V	10uF
C3324	ECA1HHG100B	ELECT	50V	10uF
C3401	ECJ2VC1H561J	CERAMIC	50V	560pF
C3404	ECJ2VC1H561J	CERAMIC	50V	560pF
C3407	ECJ2VC1H561J	CERAMIC	50V	560pF
C3408	ECJ2VC1H561J	CERAMIC	50V	560pF
C3409	ECJ2VC1H561J	CERAMIC	50V	560pF
C3410	ECJ2VC1H561J	CERAMIC	50V	560pF
C3415	ECJ2VC1H102J	CERAMIC	50V	100nF

Cct Ref	Parts Number	Description		
C3417	ECJ2VC1H561J	CERAMIC	50V	560pF
C3418	ECJ2VC1H561J	CERAMIC	50V	560pF
C3419	ECJ2VC1H561J	CERAMIC	50V	560pF
C3420	ECJ2VC1H561J	CERAMIC	50V	560pF
C3425	ECJ2VC1H102J	CERAMIC	50V	1nF
C3427	ECJ2VC1H561J	CERAMIC	50V	560pF
C3428	ECJ2VC1H561J	CERAMIC	50V	560pF
C3429	ECJ2VC1H561J	CERAMIC	50V	560pF
C3430	ECJ2VC1H561J	CERAMIC	50V	560pF
C3435	ECJ2VC1H102J	CERAMIC	50V	1nF
C3437	ECJ2VC1H561J	CERAMIC	50V	560pF
C3440	ECJ2VC1H561J	CERAMIC	50V	560pF
C3443	ECJ2VC1H561J	CERAMIC	50V	560pF
C3446	ECJ2VC1H561J	CERAMIC	50V	560pF
C3450	ECEA1AKA221B	ELECT	10V	220µF
C3451	ECEA1AKA221B	ELECT	10V	220µF
C3452	ECEA1CKA101	ELECT	16V	100µF
C3453	ECEA1CKA101	ELECT	16V	100µF
C3454	ECJ2VC1H220J	CERAMIC	50V	22pF
C3455	ECJ2VC1H220J	CERAMIC	50V	22pF
C3456	ECJ2VC1H220J	CERAMIC	50V	22pF
C3457	ECJ2VC1H221J	CERAMIC	50V	220pF
C3458	ECJ2VC1H221J	CERAMIC	50V	220pF
C3459	ECJ2VC1H221J	CERAMIC	50V	220pF
C4801	ECA1HM101GB	ELECT	50V	100µF
C4802	ECJ2VF1C104Z	CERAMIC	16V	470nF
C4803	ECQV1H334JL3	FILM	50V	330nF
C4804	ECQV1H334JL3	FILM	50V	330nF
C4805	ECJ2VF1C104Z	CERAMIC	16V	470nF
C4806	ECJ2VB1H103K	CERAMIC	50V	10nF
C4807	ECA1HM4R7GB	ELECT	50V	4.7µF
C4808	ECA1HM4R7GB	ELECT	50V	4.7µF
C4809	ECJ2VB1H103K	CERAMIC	50V	10nF

TERMINALS AND LINKS

JK2402	TORX1788	OPTICAL CONNECTOR	
JK2403	TJS59034	COAXIAL TERMINAL	
JK3401	0350536400	SCART SOCKET	
JK3402	0350536400	SCART SOCKET	
JK3403	0350536400	SCART SOCKET	
JK3405	TJB8E015	RCA TERMINAL(3P)	
JK3406	TJB8E015	RCA TERMINAL(3P)	
R868	TSF19252	FS LINK	△
R874	TSF19402	FS LINK	△
R2405	TSF19252	FS LINK	△
R2419	TSF19402	FS LINK	△
R2420	TSF19252	FS LINK	△

SWITCHES

S840	ESB92S11B	SWITCH	△
S1003	EVQ23405R	SWITCH	
S1004	EVQ23405R	SWITCH	
S1005	EVQ23405R	SWITCH	
S1006	EVQ23405R	SWITCH	
S1007	EVQ23405R	SWITCH	

RELAYS

RL801	K6B1ADA00010	RELAY	△
RL802	K6B2ADA00004	RELAY	△


Cct Ref	Parts Number	Description
---------	--------------	-------------

SCHEMATIC DIAGRAMS FOR MODEL




TX-36PG50

(EURO-7 CHASSIS)



IMPORTANT SAFETY NOTICE

Components identified by  mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

NOTE

- RESISTOR**
All resistors are carbon 1/4W resistor, unless marked otherwise.
Unit of resistance is OHM (Ω) (k=1,000, M=1,000,000)
- CAPACITORS**
All capacitors are ceramic 50V unless marked otherwise.
Unit of capacitance is µF unless otherwise stated.
- COIL**
Unit of inductance is µH, unless otherwise stated.
- TEST POINT**
 Test Point Position
- EARTH SYMBOL**
 Chassis Earth (Cold)
 Line Earth (Hot)
- VOLTAGE MEASUREMENT**
Voltage is measured by a d.c. voltmeter.
Measurement conditions are as follows:
Power source a.c. 220V-240V, 50Hz
Receiving Signal Colour Bar signal (RF)
All customer controls Maximum position

7.

-  Indicates the Video signal path
-  Indicates the Audio signal path

These schematic diagrams are the latest at time of printing and are subject to change without notice.


REMARKS


- Do not touch the hot part, or the hot and cold parts at the same time, as you are liable to a shock hazard.
- Do not short circuit the hot and cold circuits as electrical components may be damaged.
- Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously as this may cause fuse failure. Connect the earth of the instruments to the earth connection of the circuit being measured.
- Make sure to disconnect the power plug before removing the chassis.

NOTE

- The Power Supply Circuit contains a circuit area, which uses a separate power supply to isolate the earth connection. The circuit is defined by HOT and COLD indications in the schematic diagram. All circuits, except the Power Circuit, are COLD.


SCHEMA -K

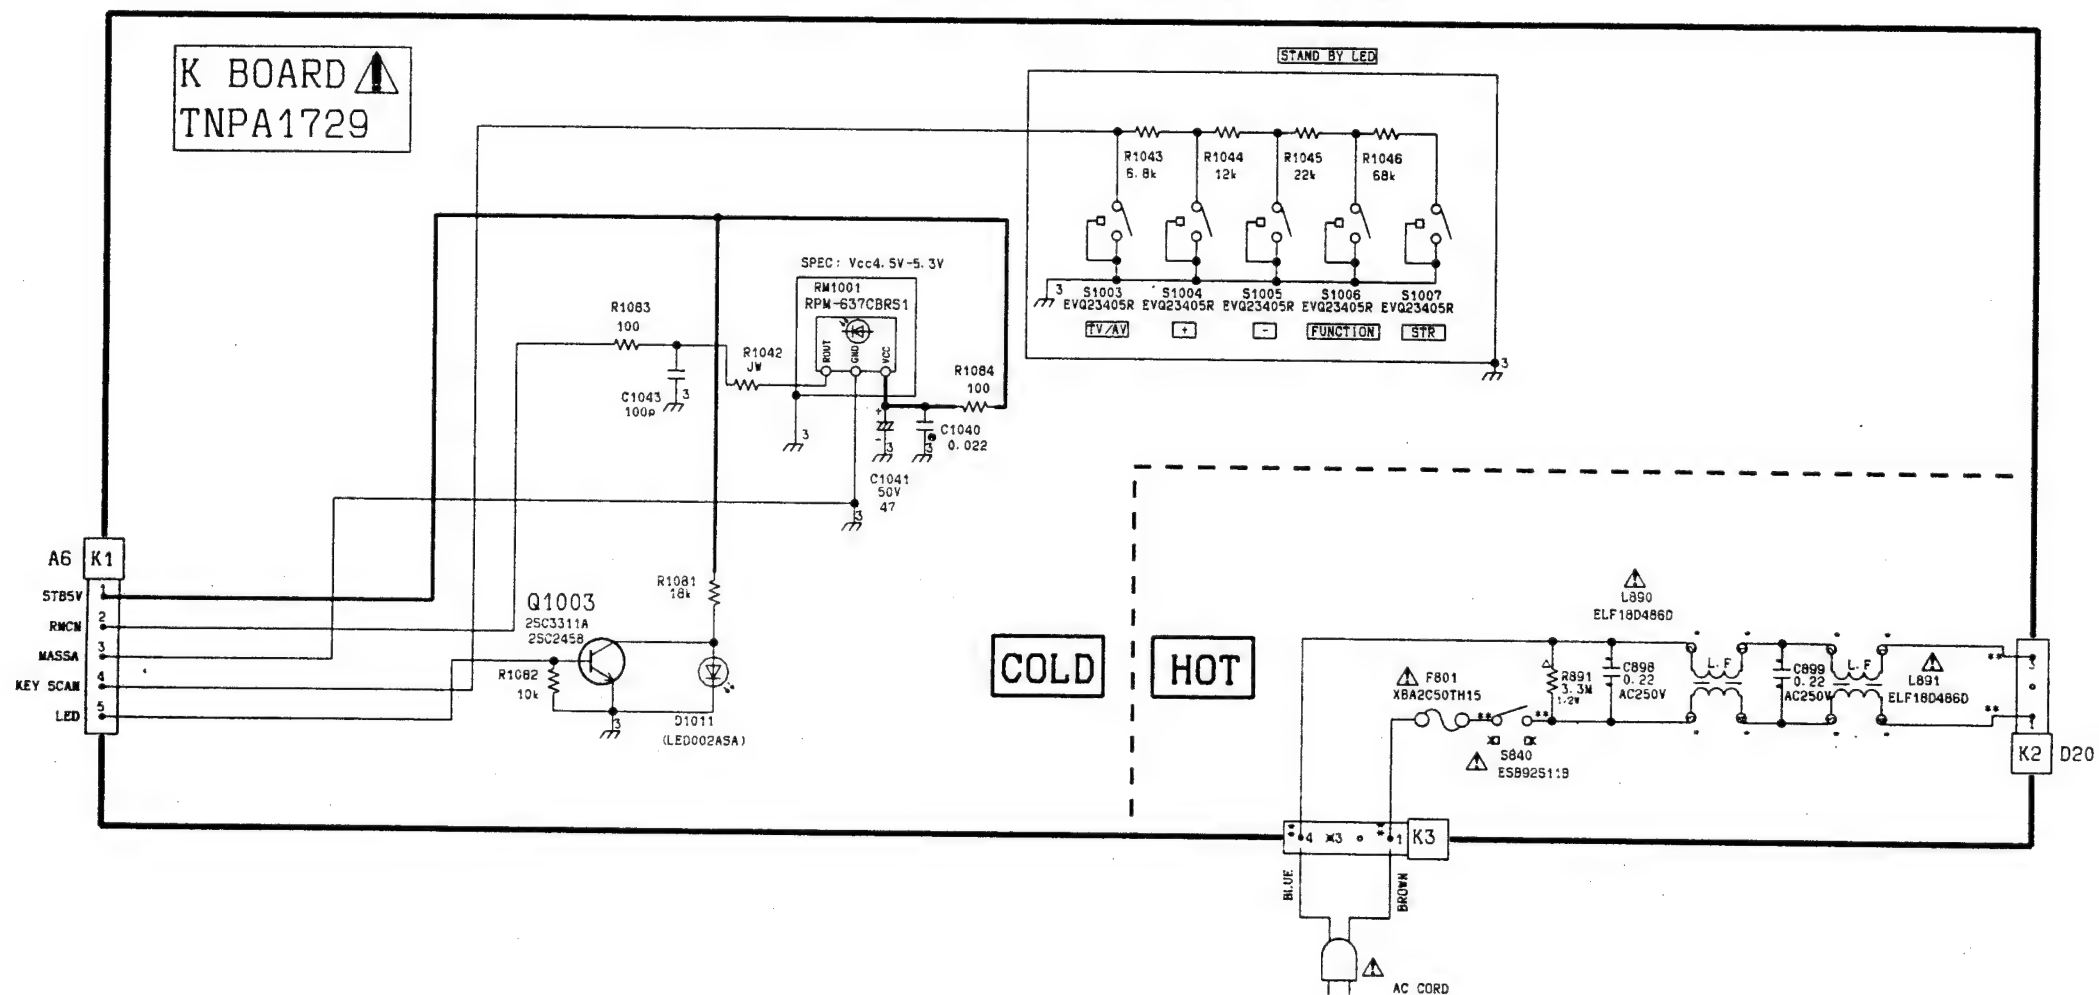


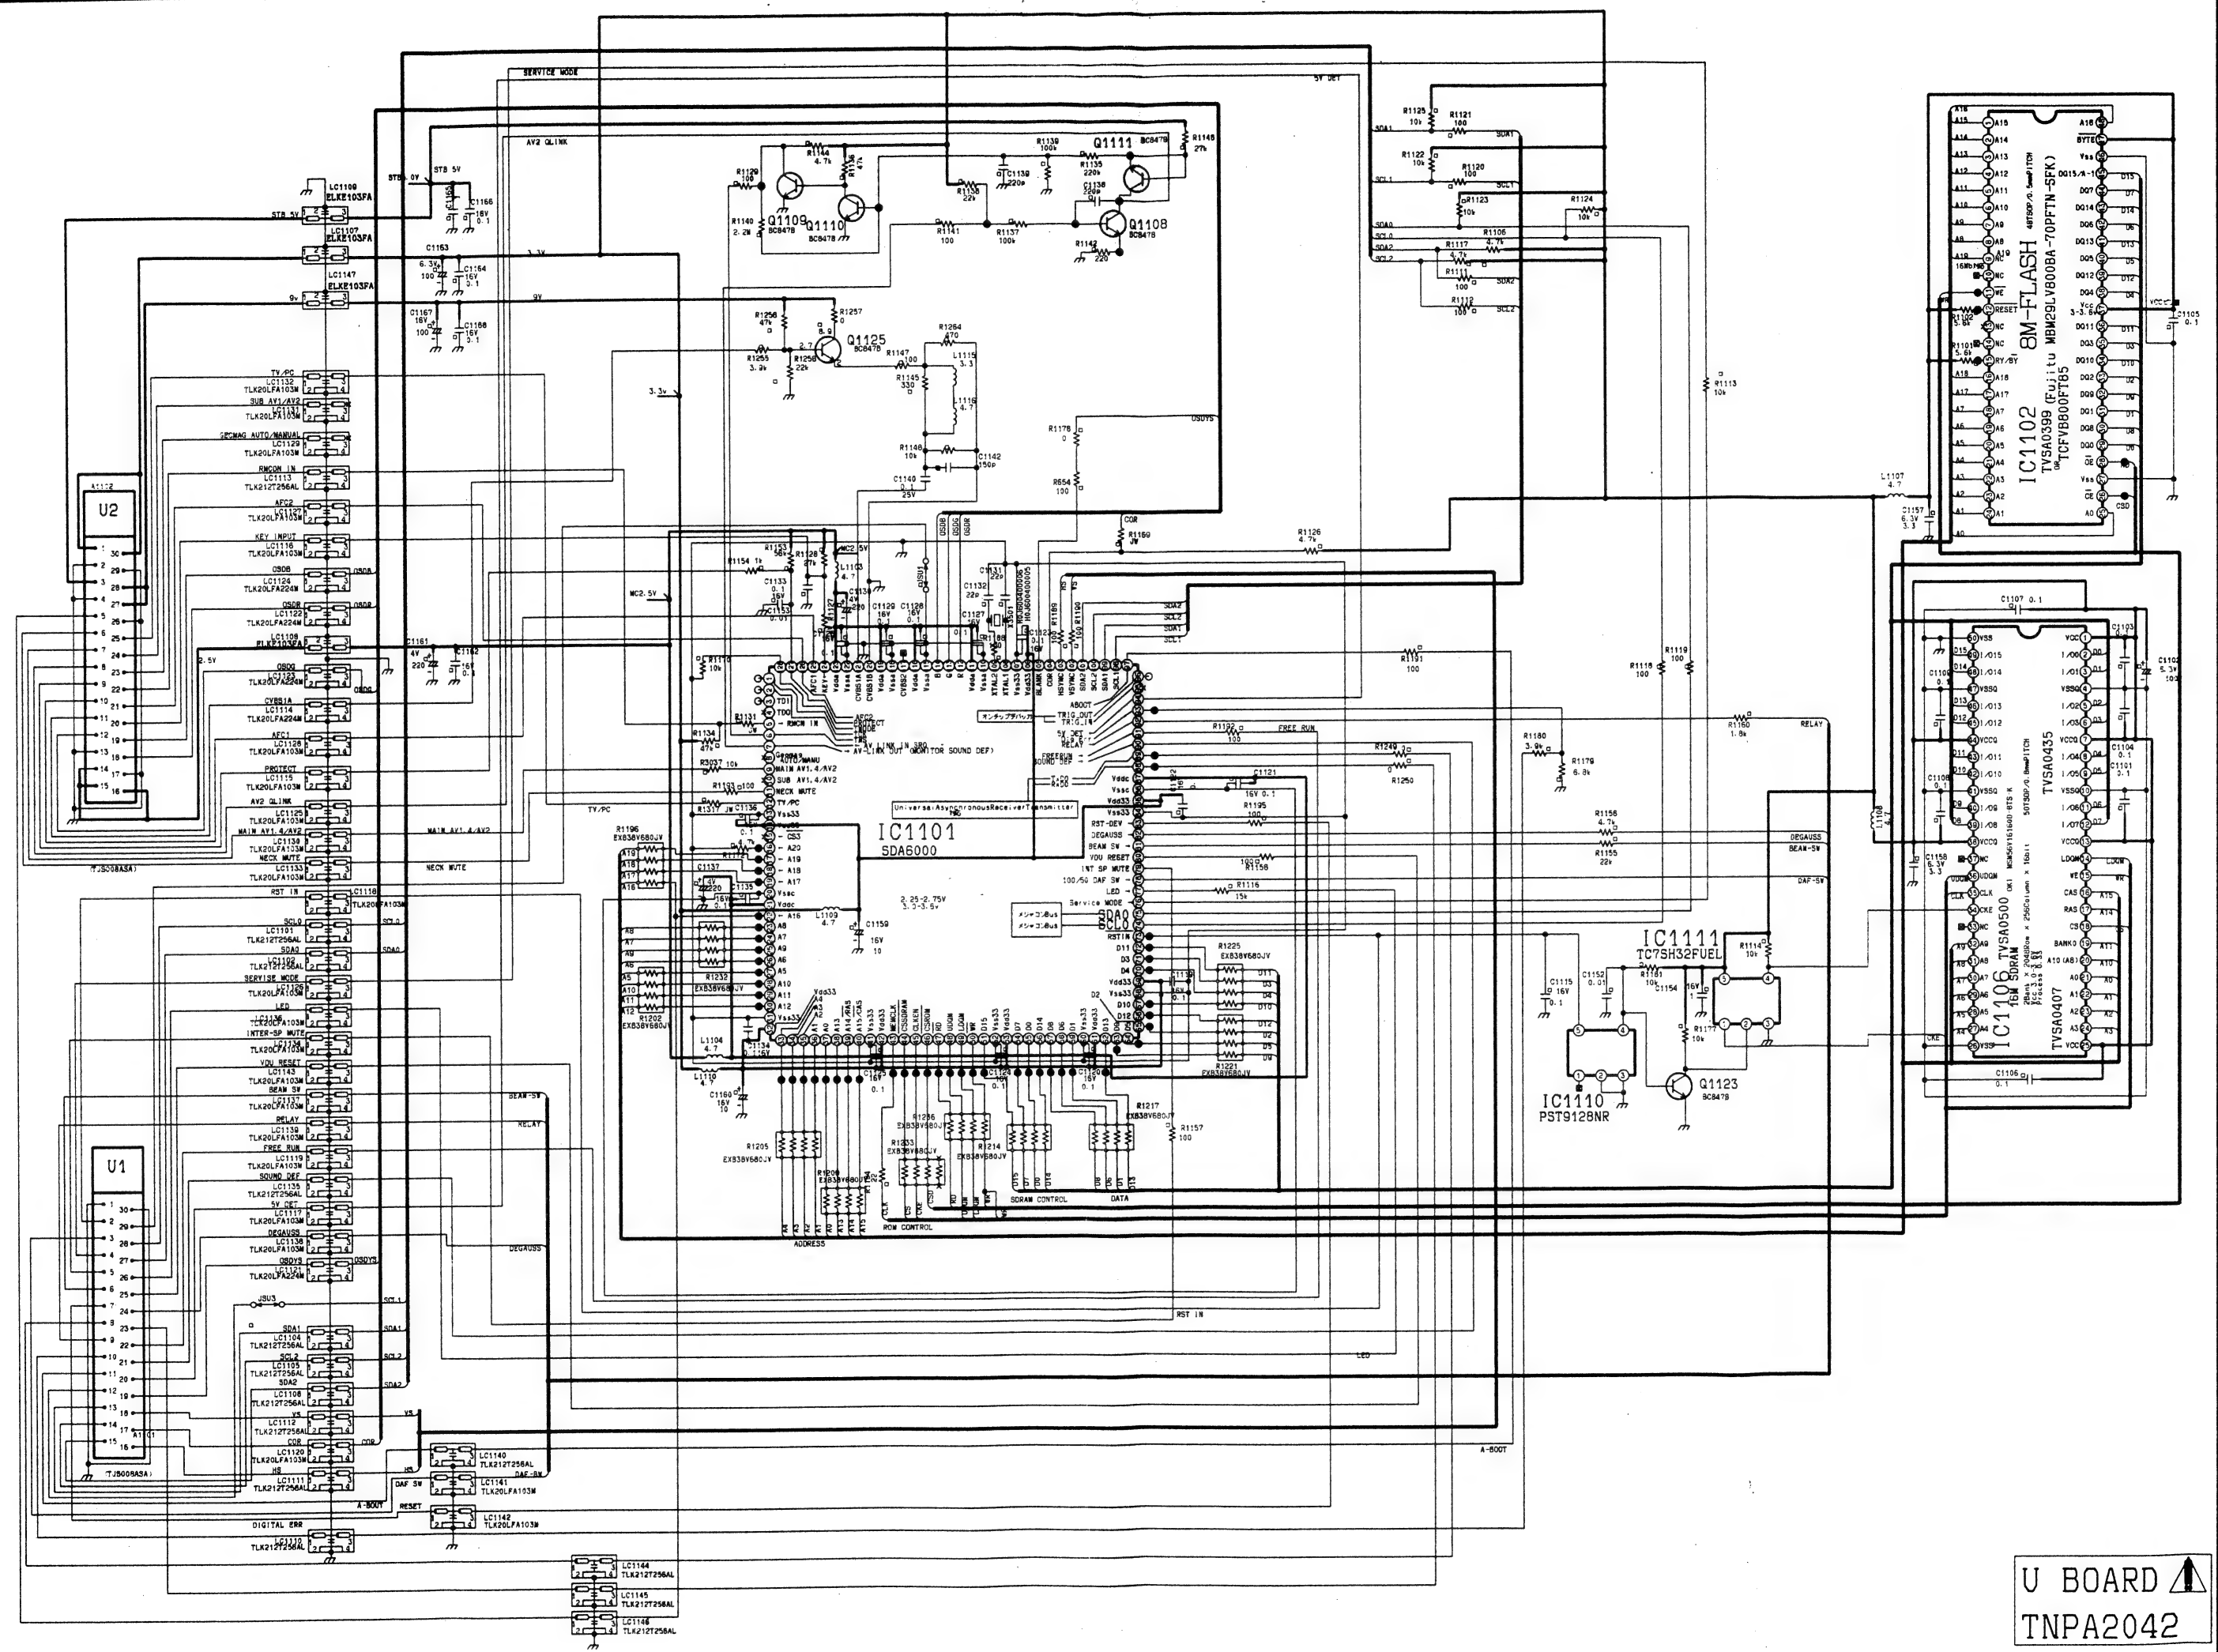



U BOARD ▲
TNPA2042


A BOARD
TNP0348

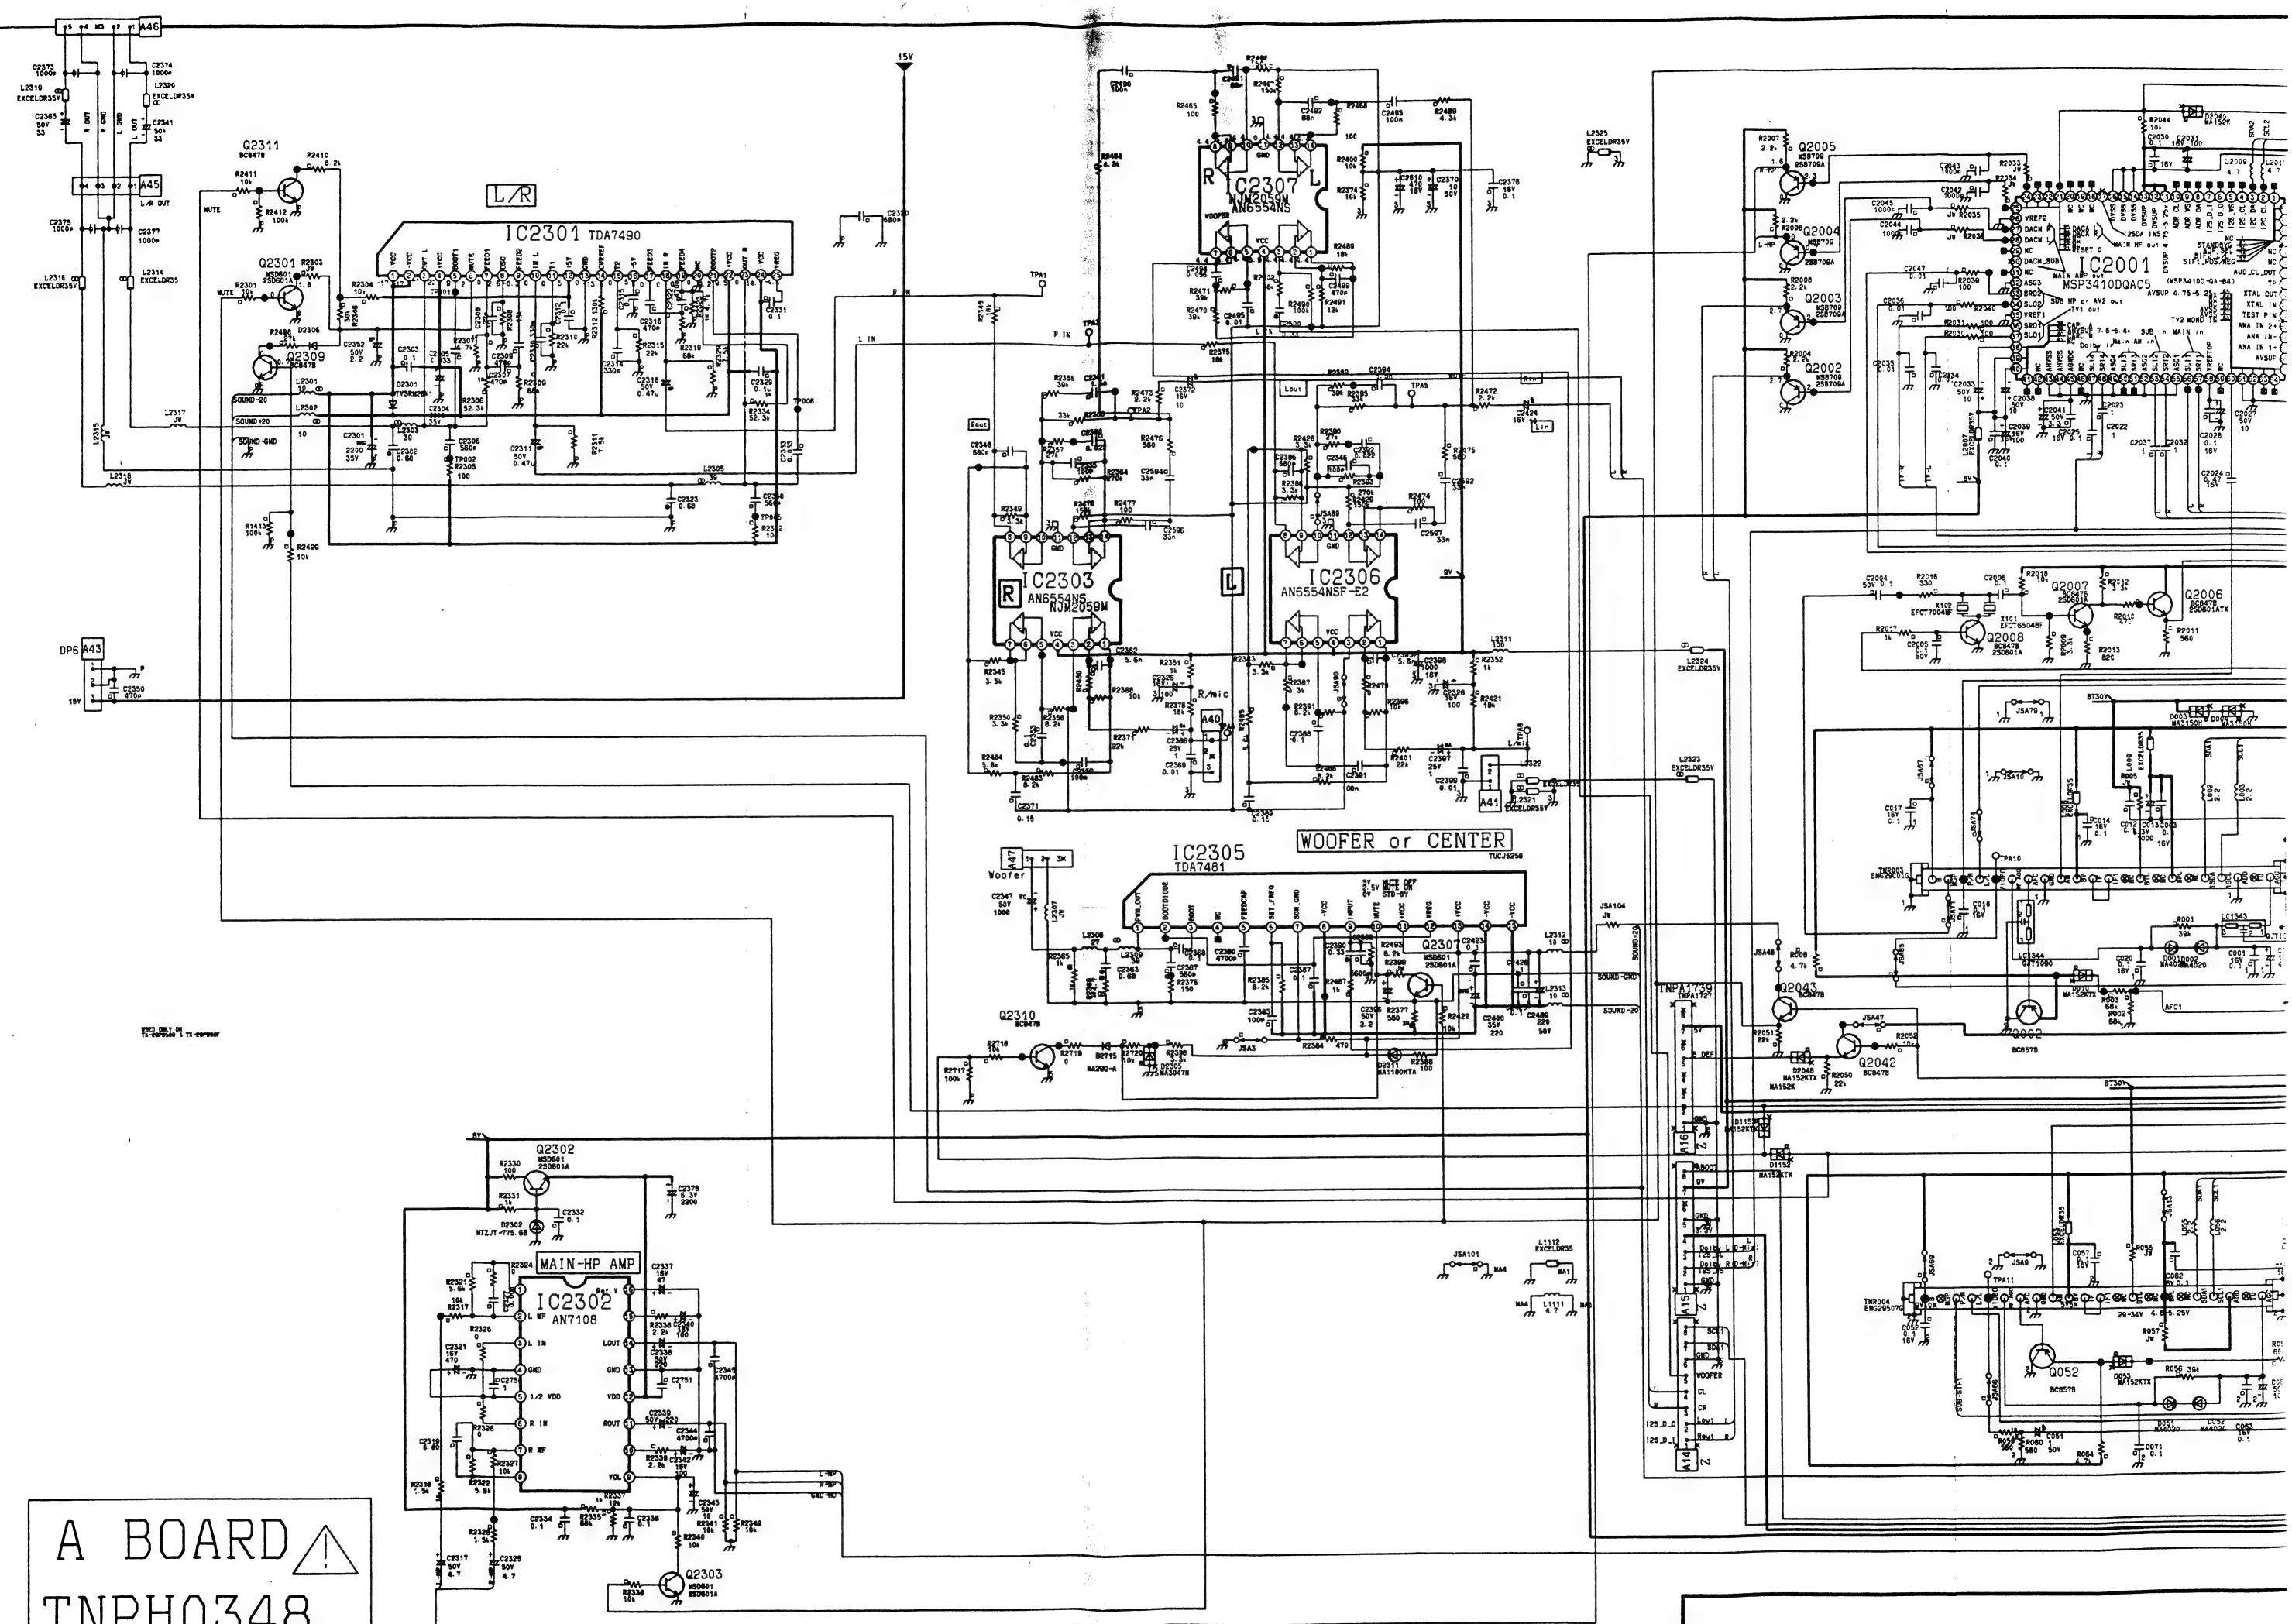

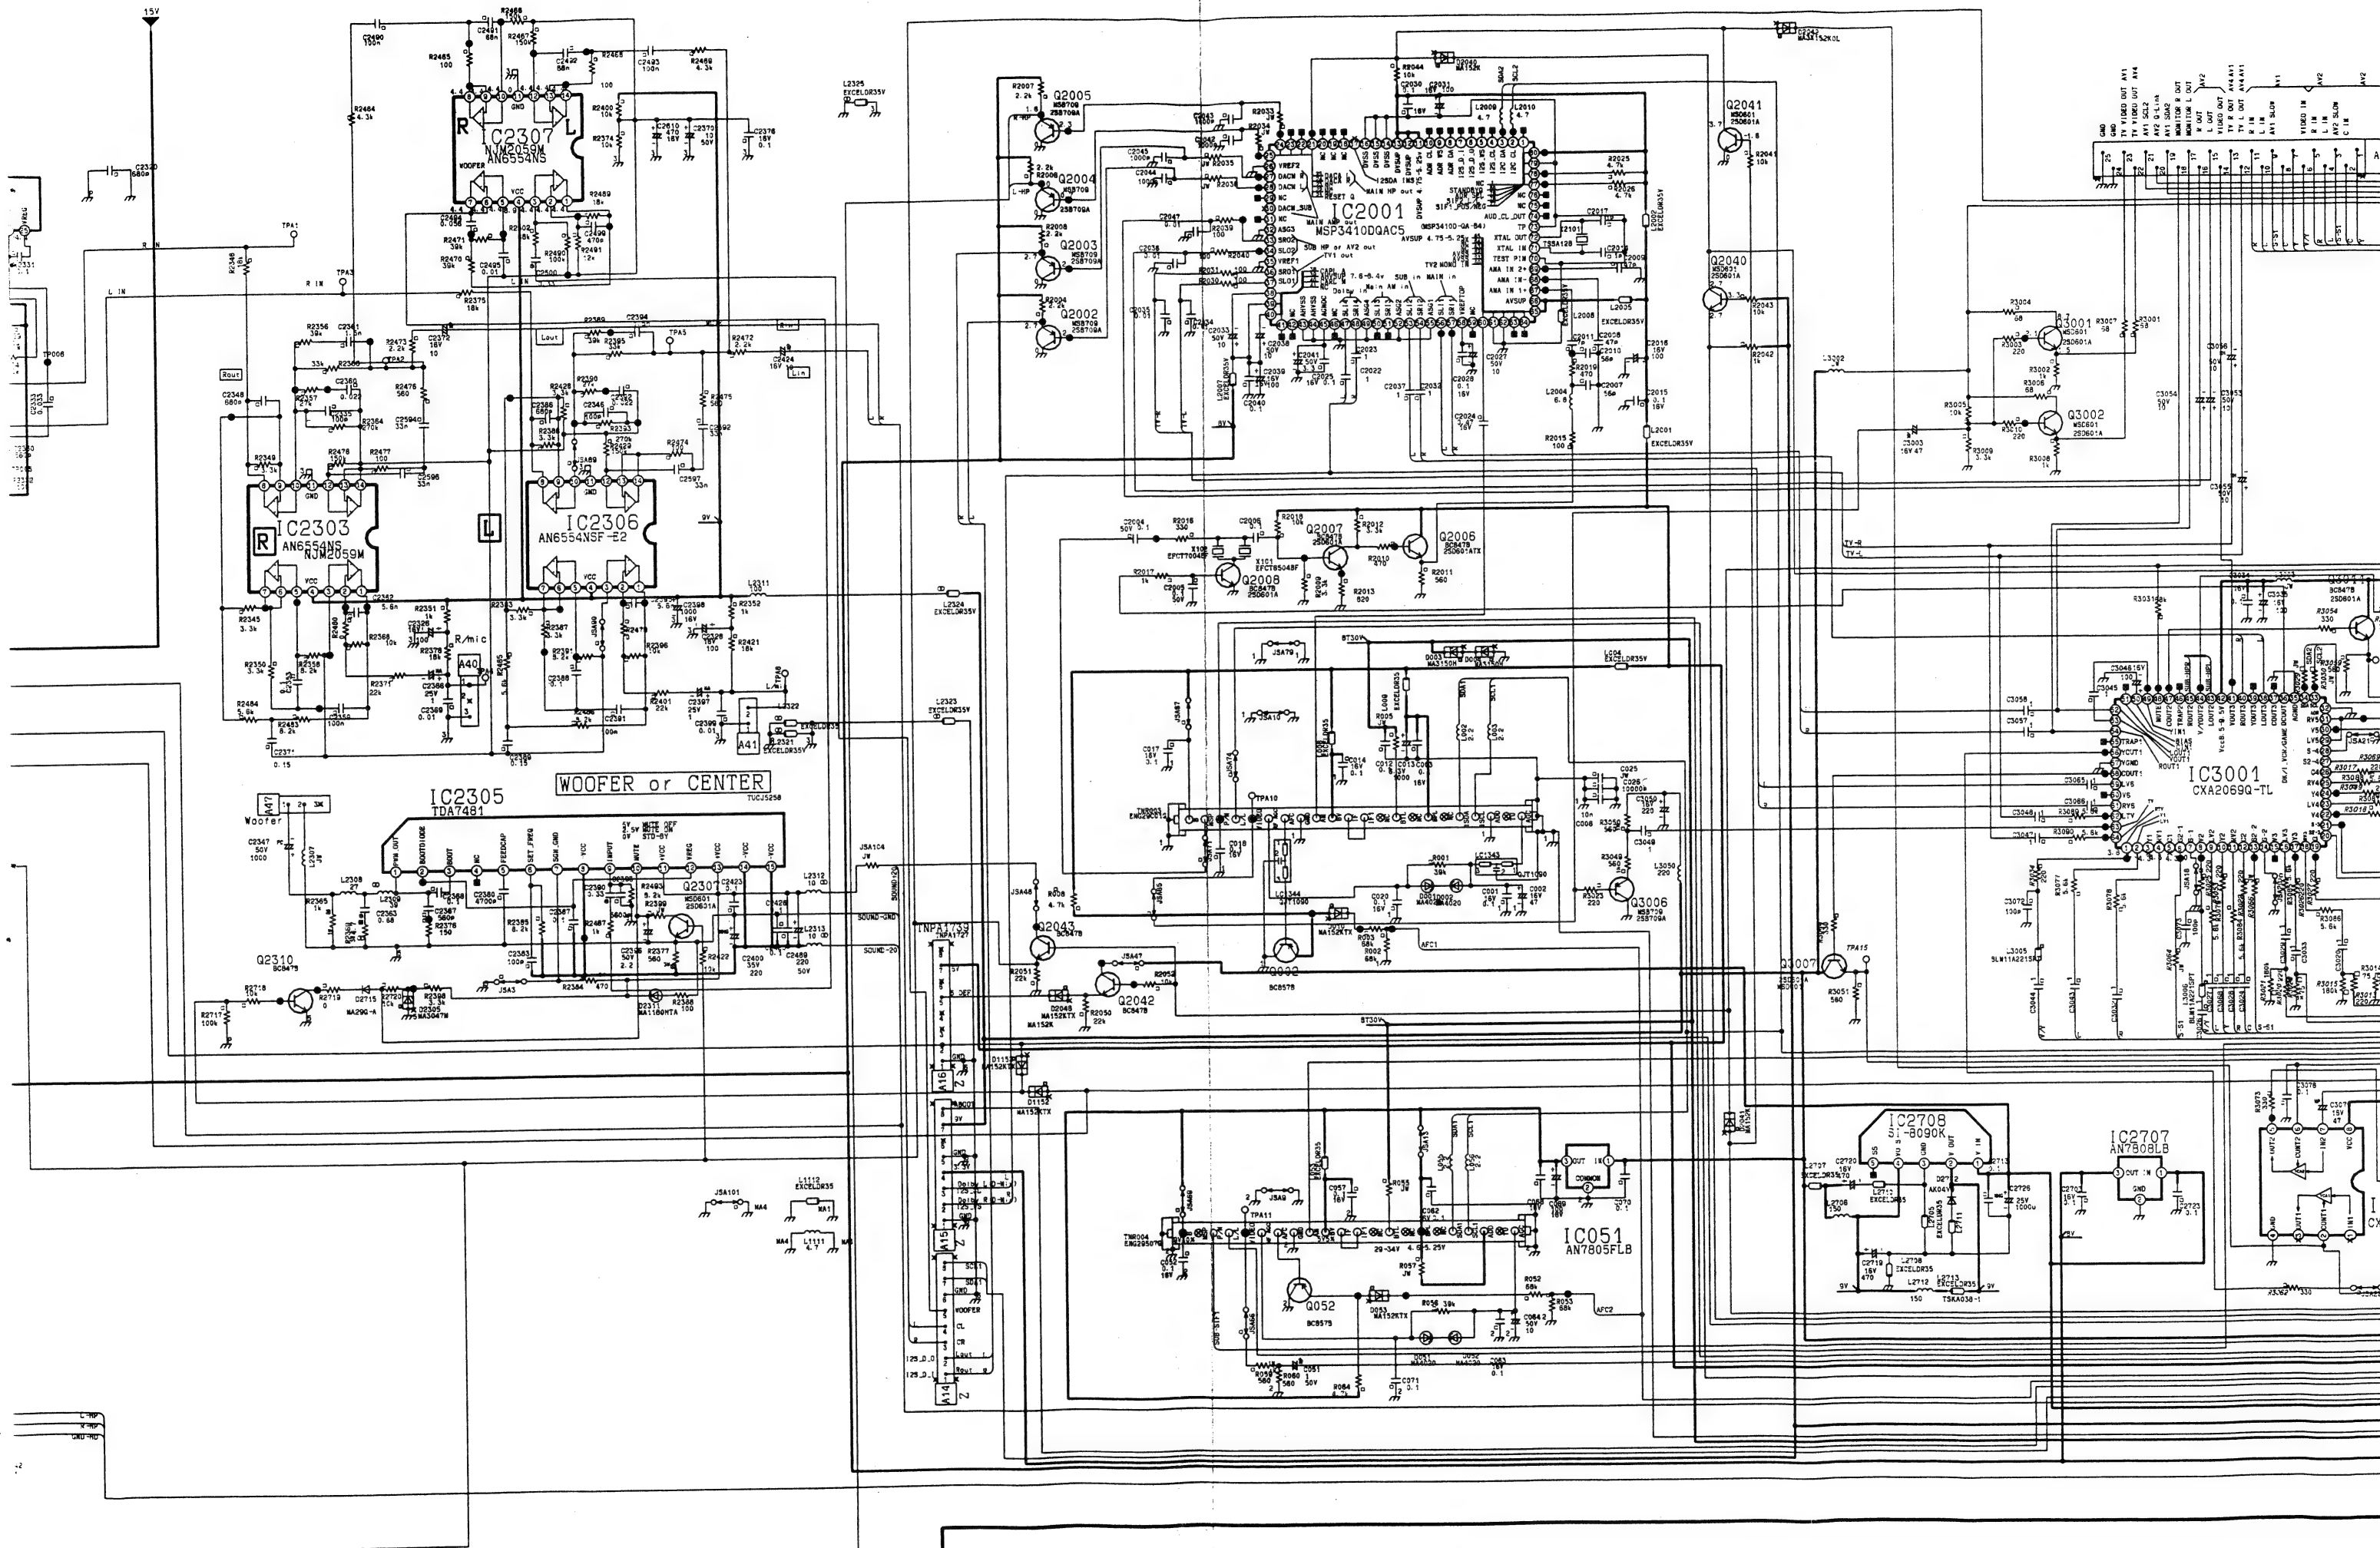

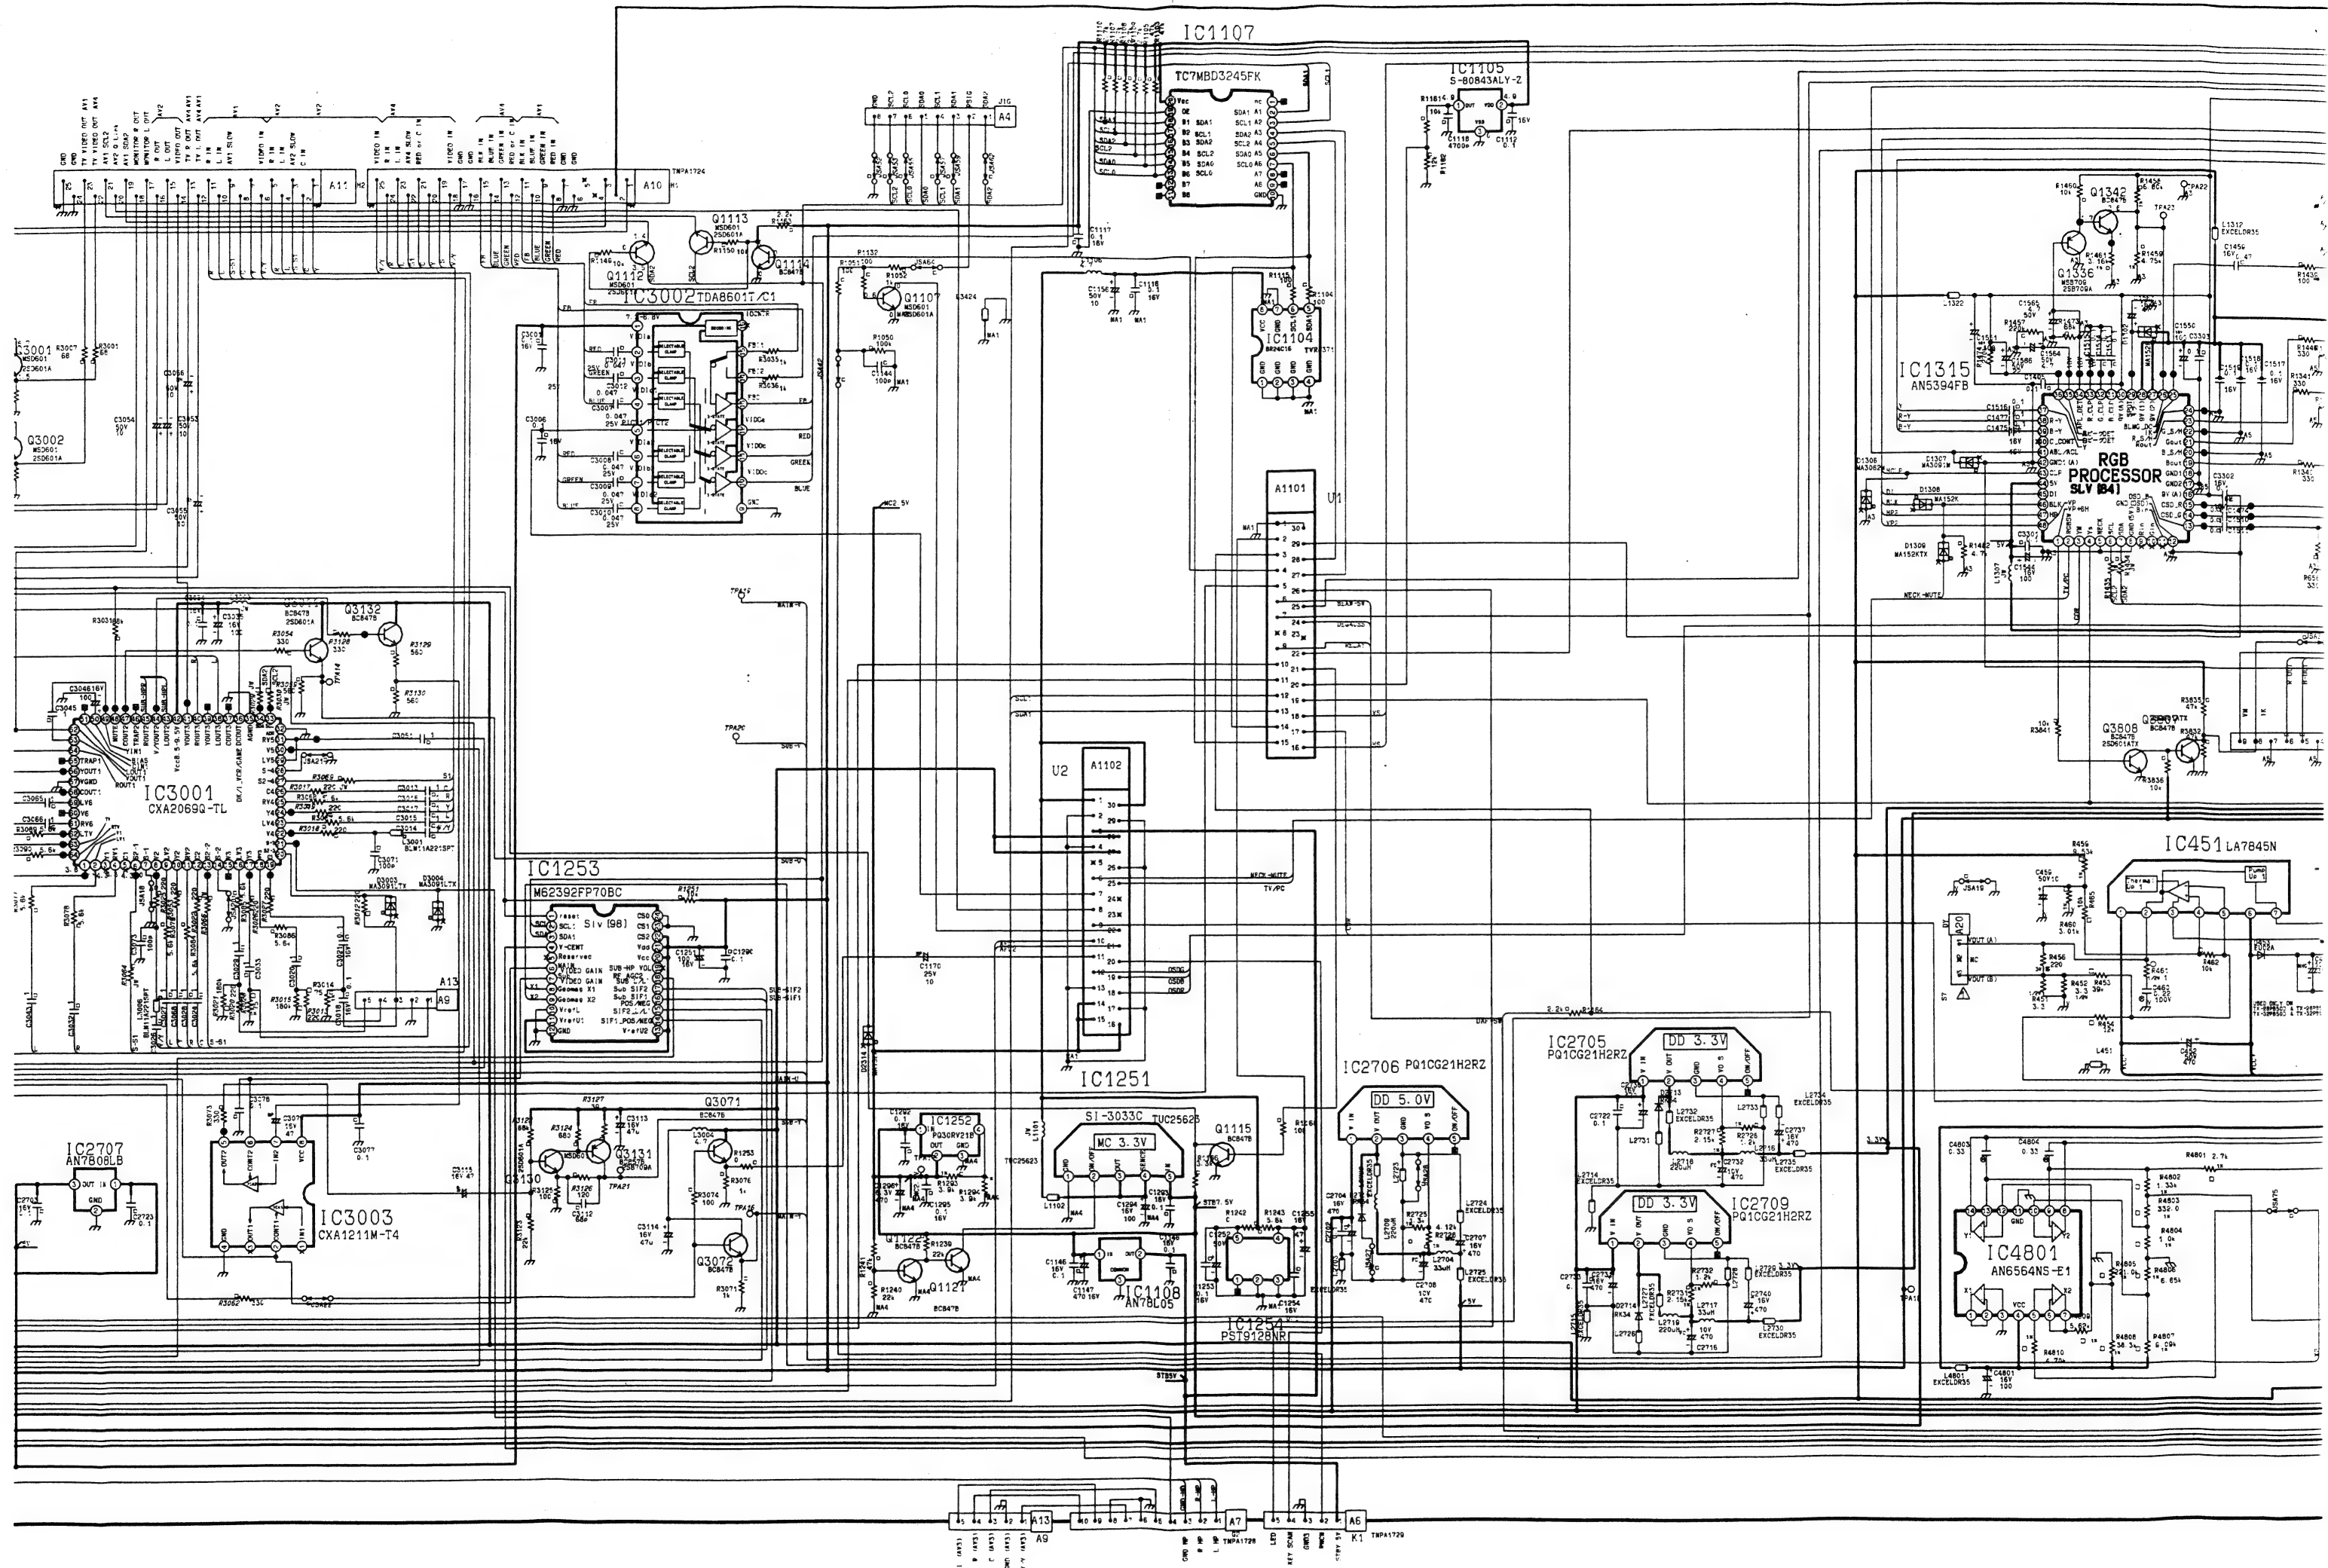

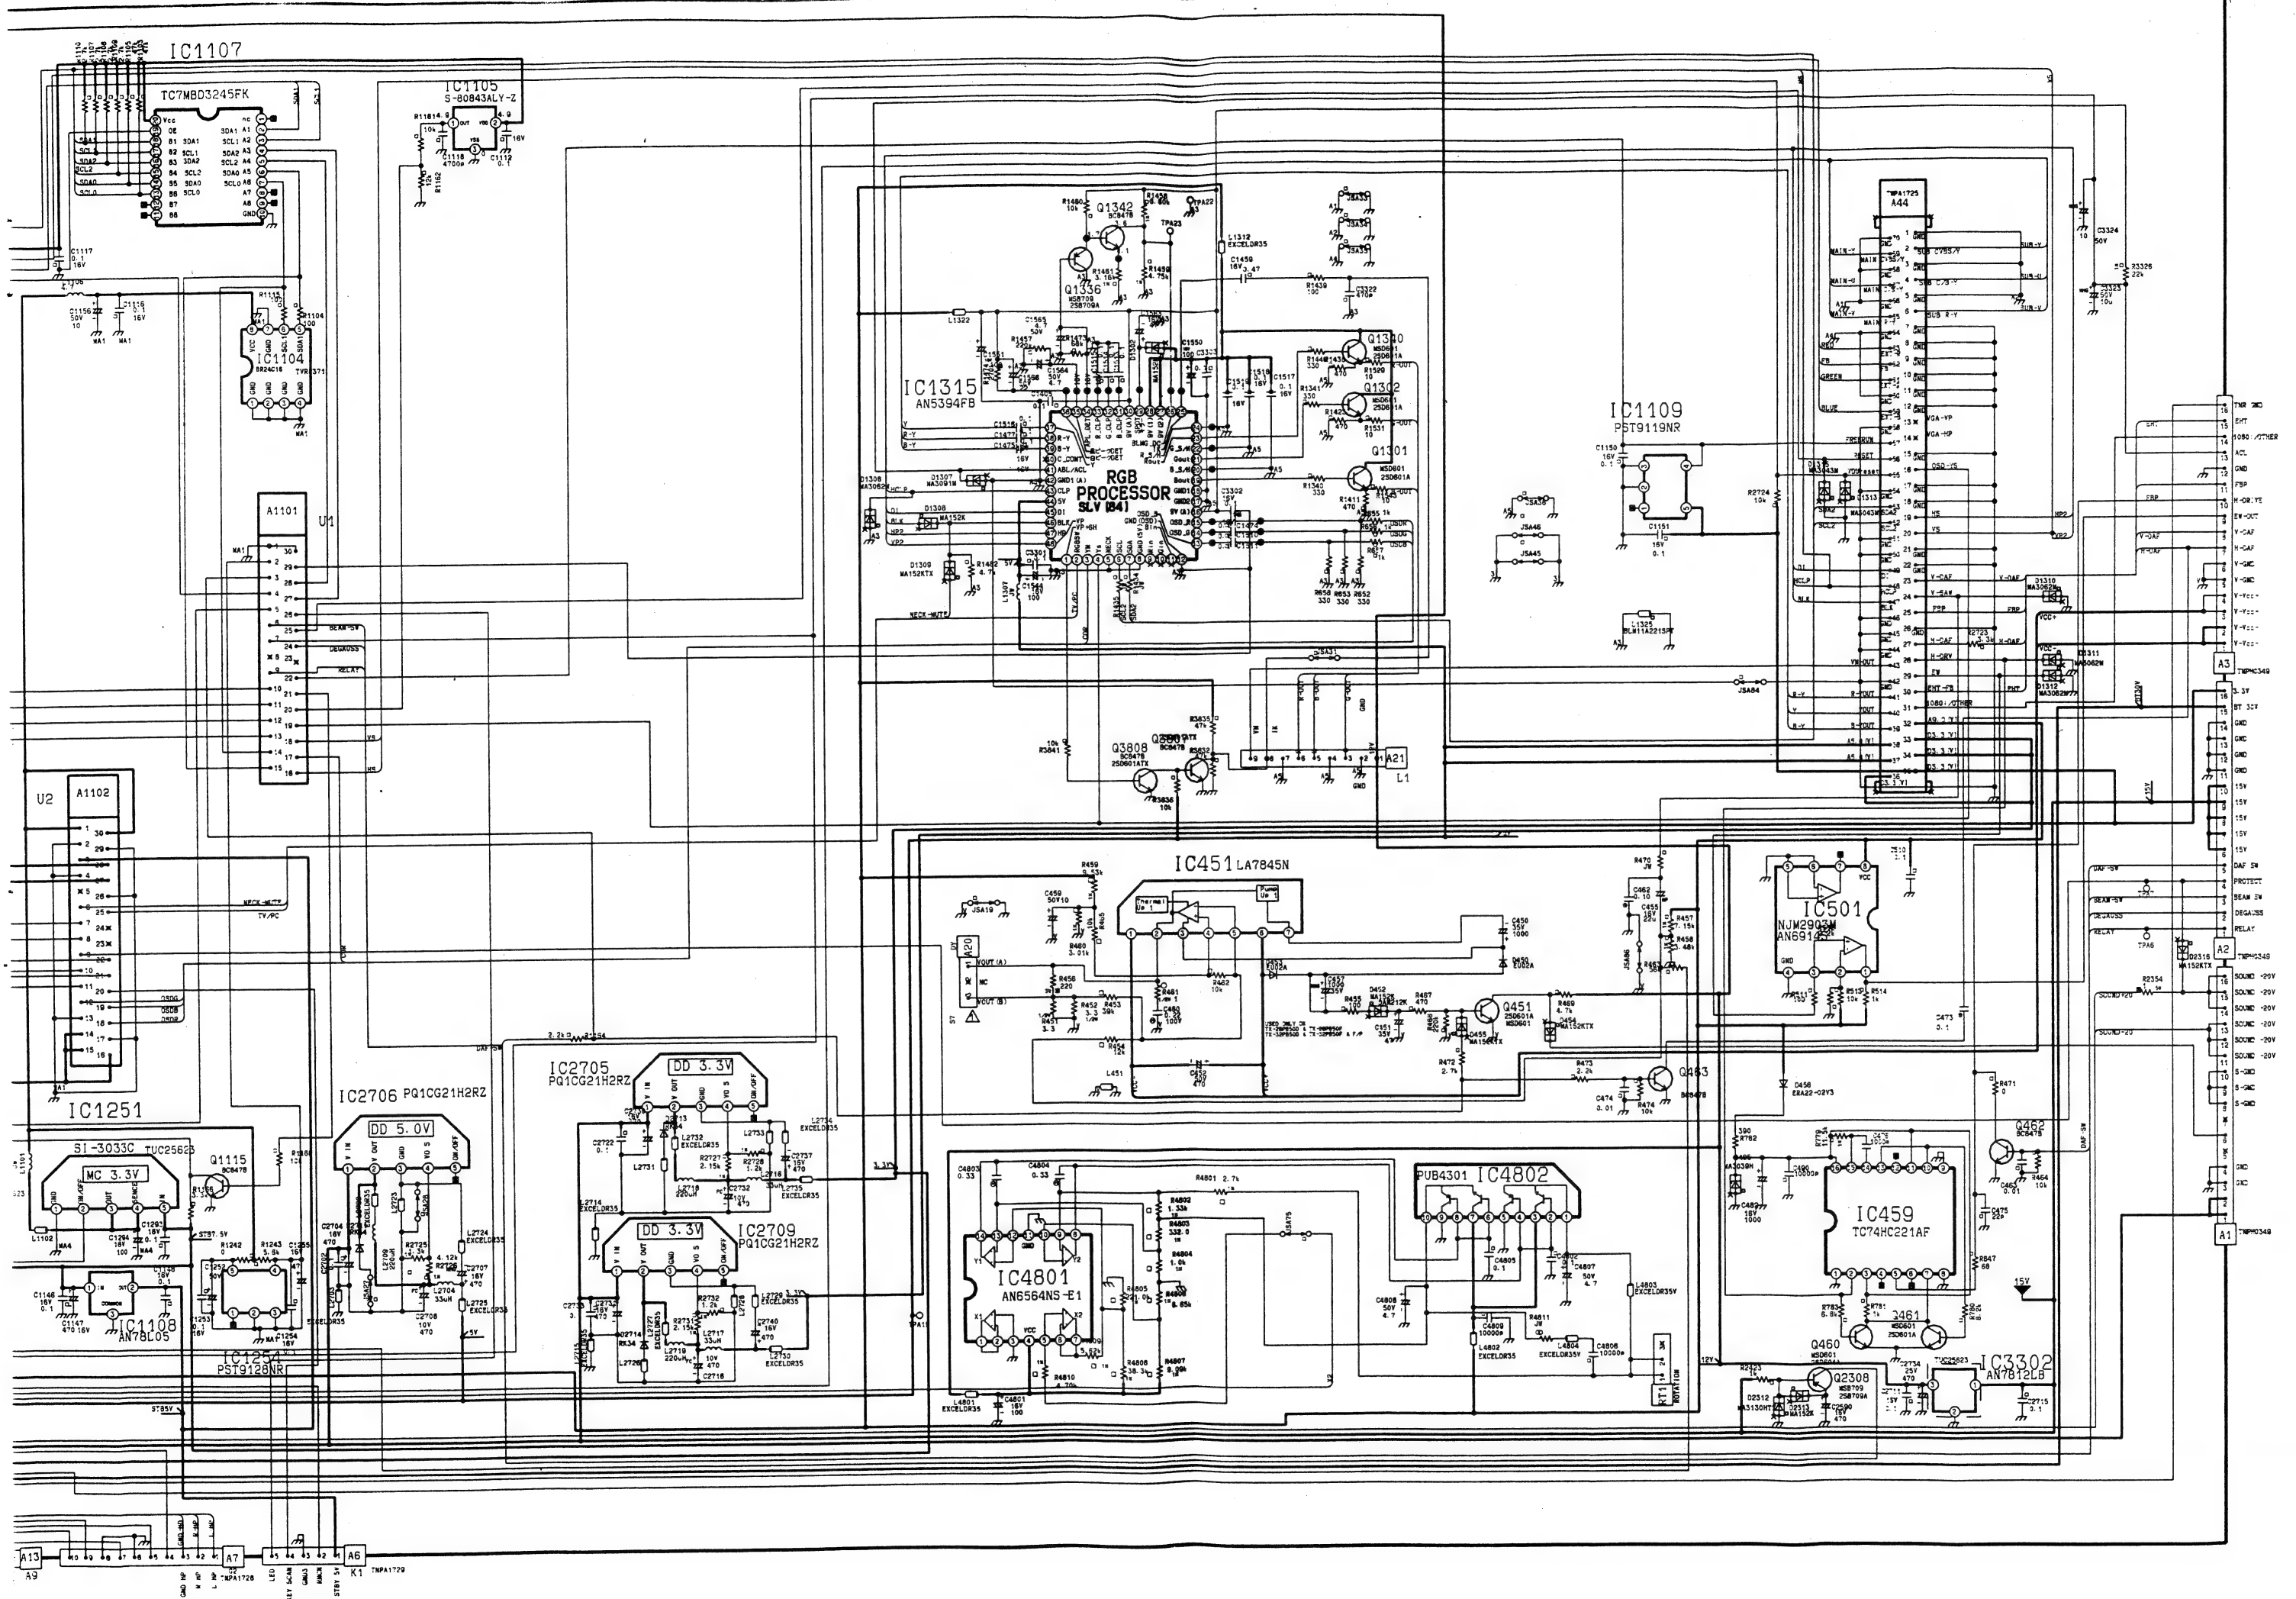

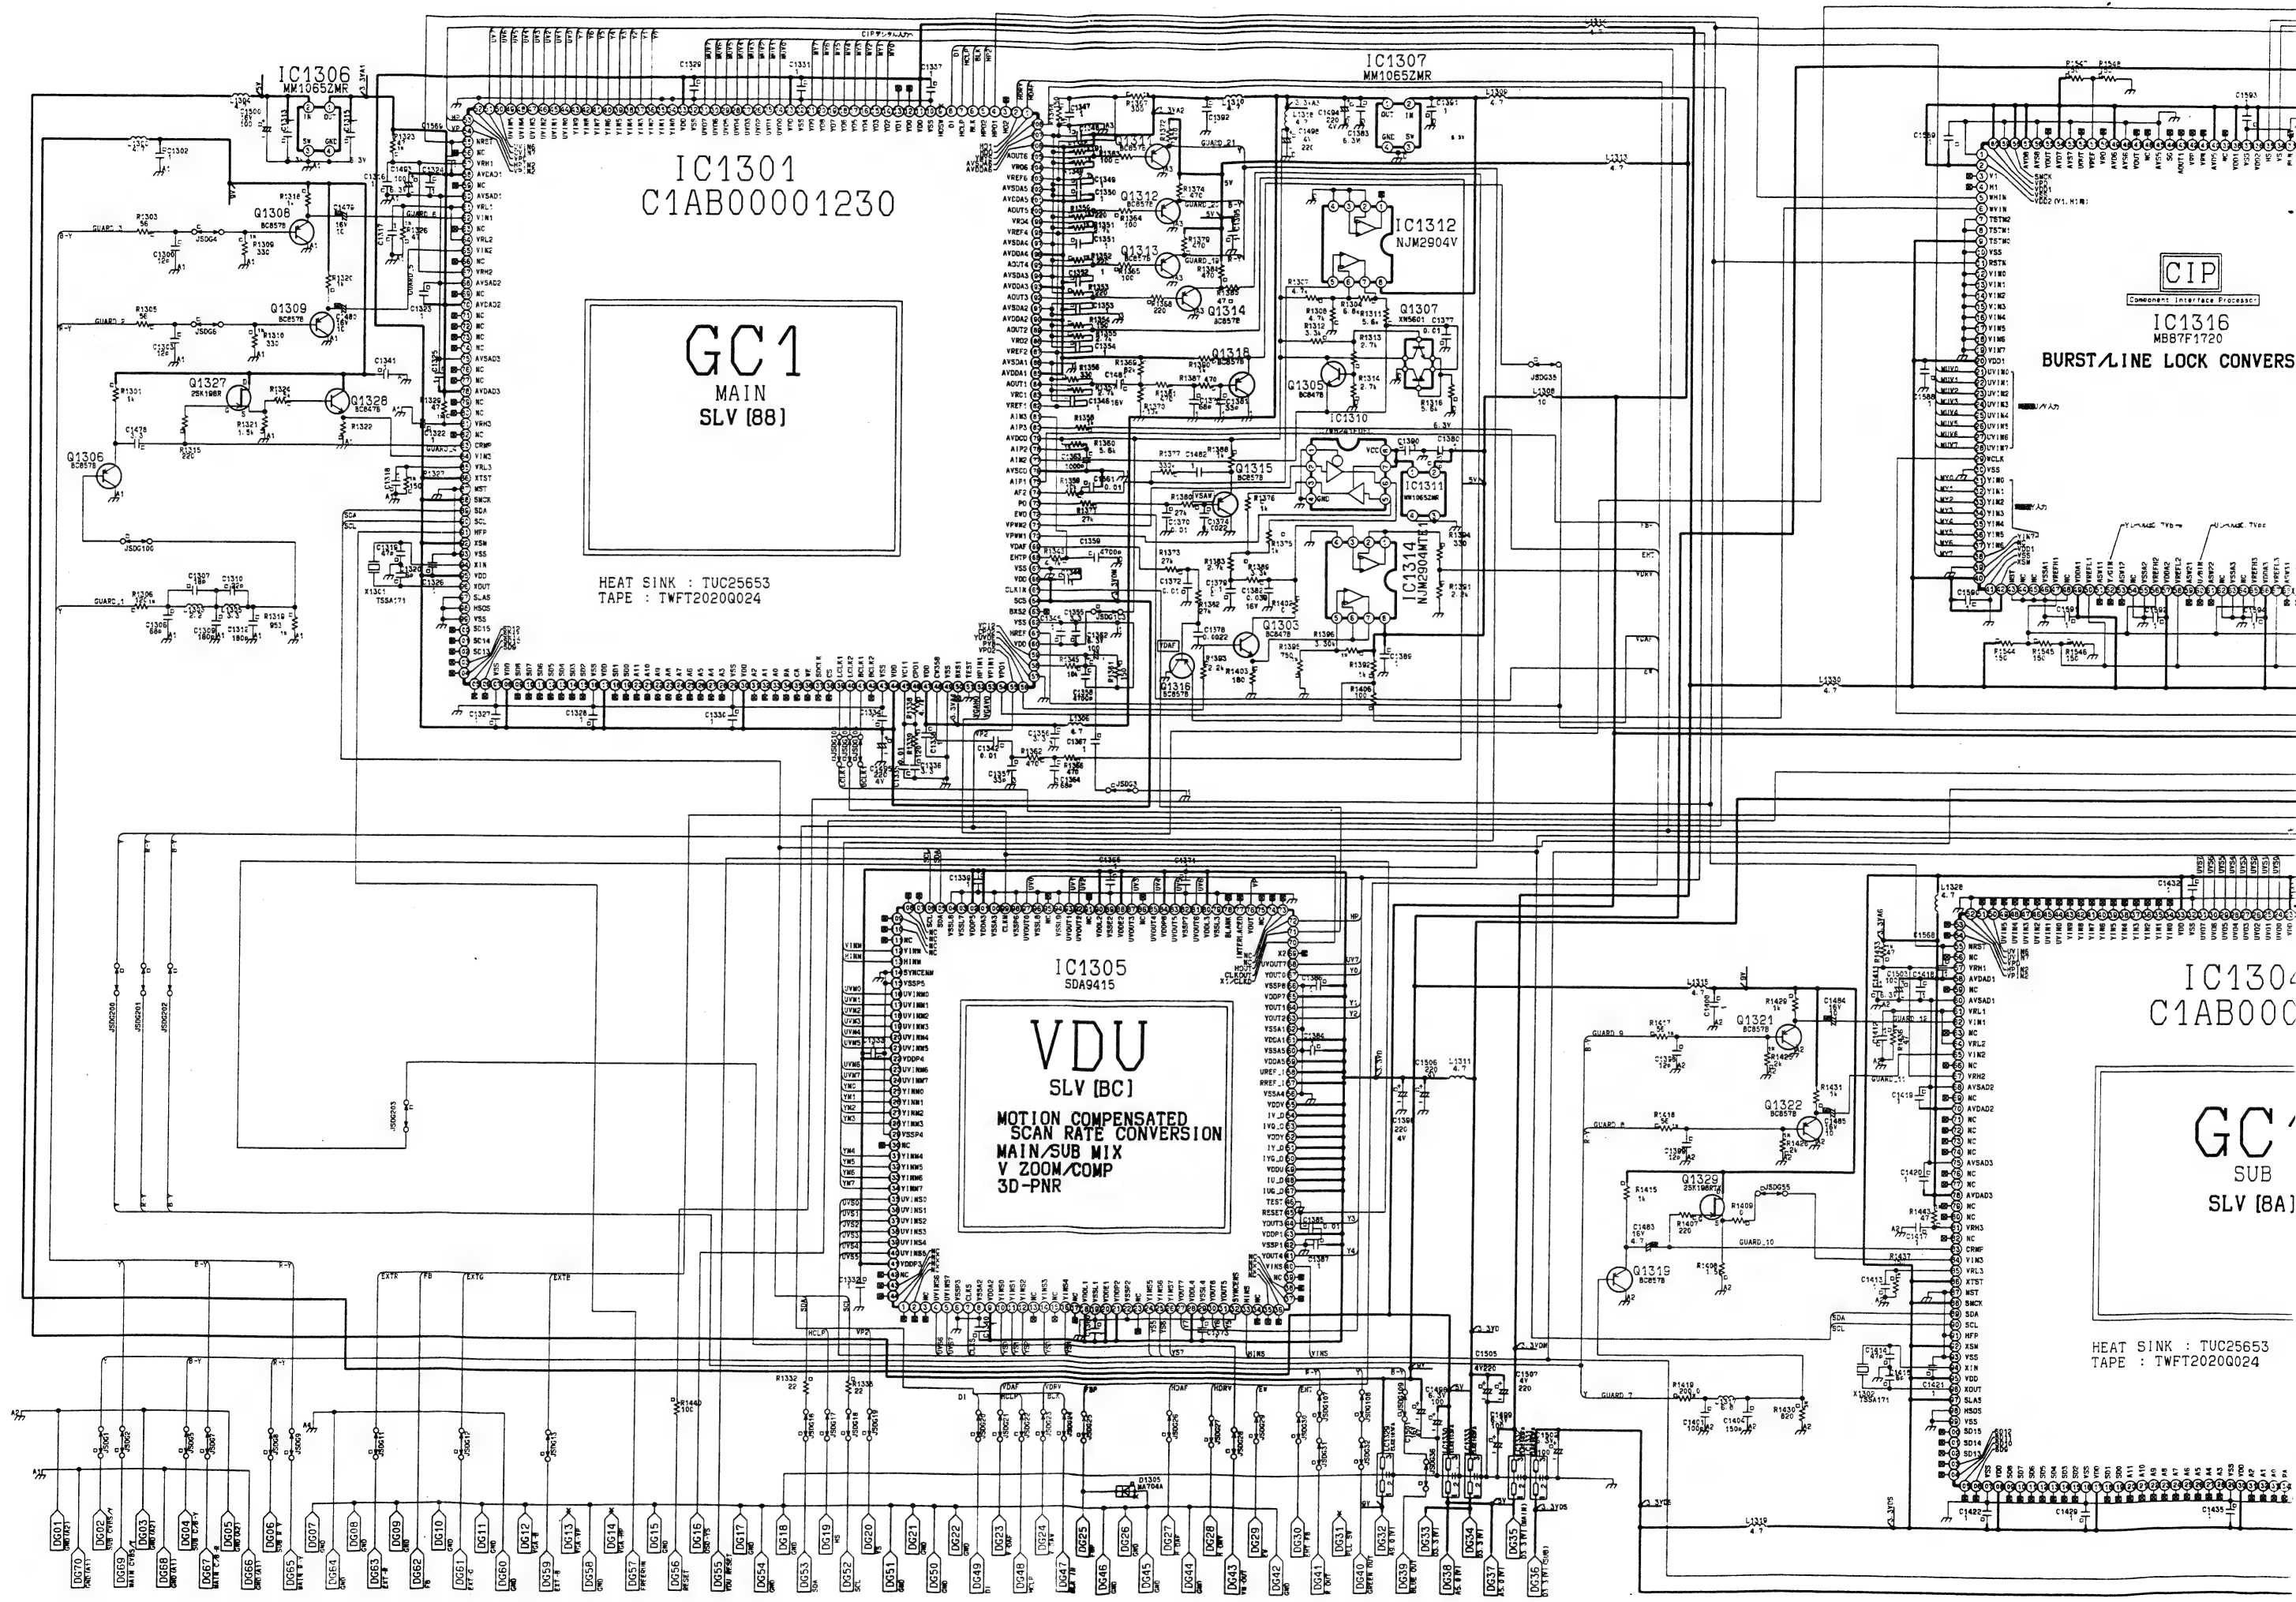

IC1301
C1AB00001230

GC1
MAIN
SLV [88]




HEAT SINK : TUC25653
TAPE : TWFT2020Q024

IC1305
SDA9415
VDU
SLV [BC]
MOTION COMPENSATED
SCAN RATE CONVERSION
MAIN/SUB MIX
V ZOOM/COMP
3D-PNR

CIP
COMMON INTERFACE PROCESSOR
IC1316
MB87F1720
BURST/LINE LOCK CONVERS


IC1304
C1AB00001230
GC
SUB
SLV [8A]


HEAT SINK : TUC25653
TAPE : TWFT2020Q024

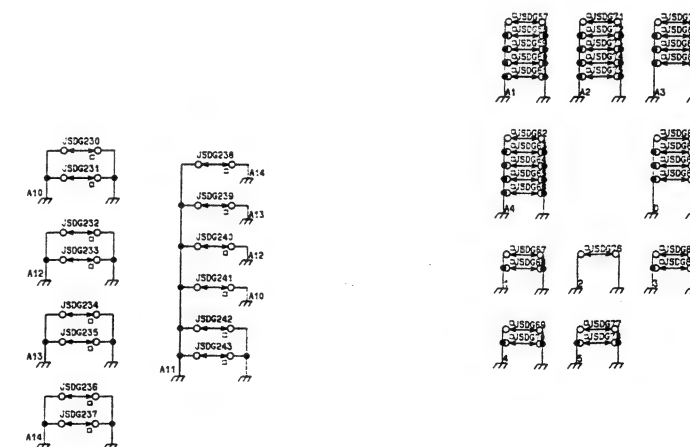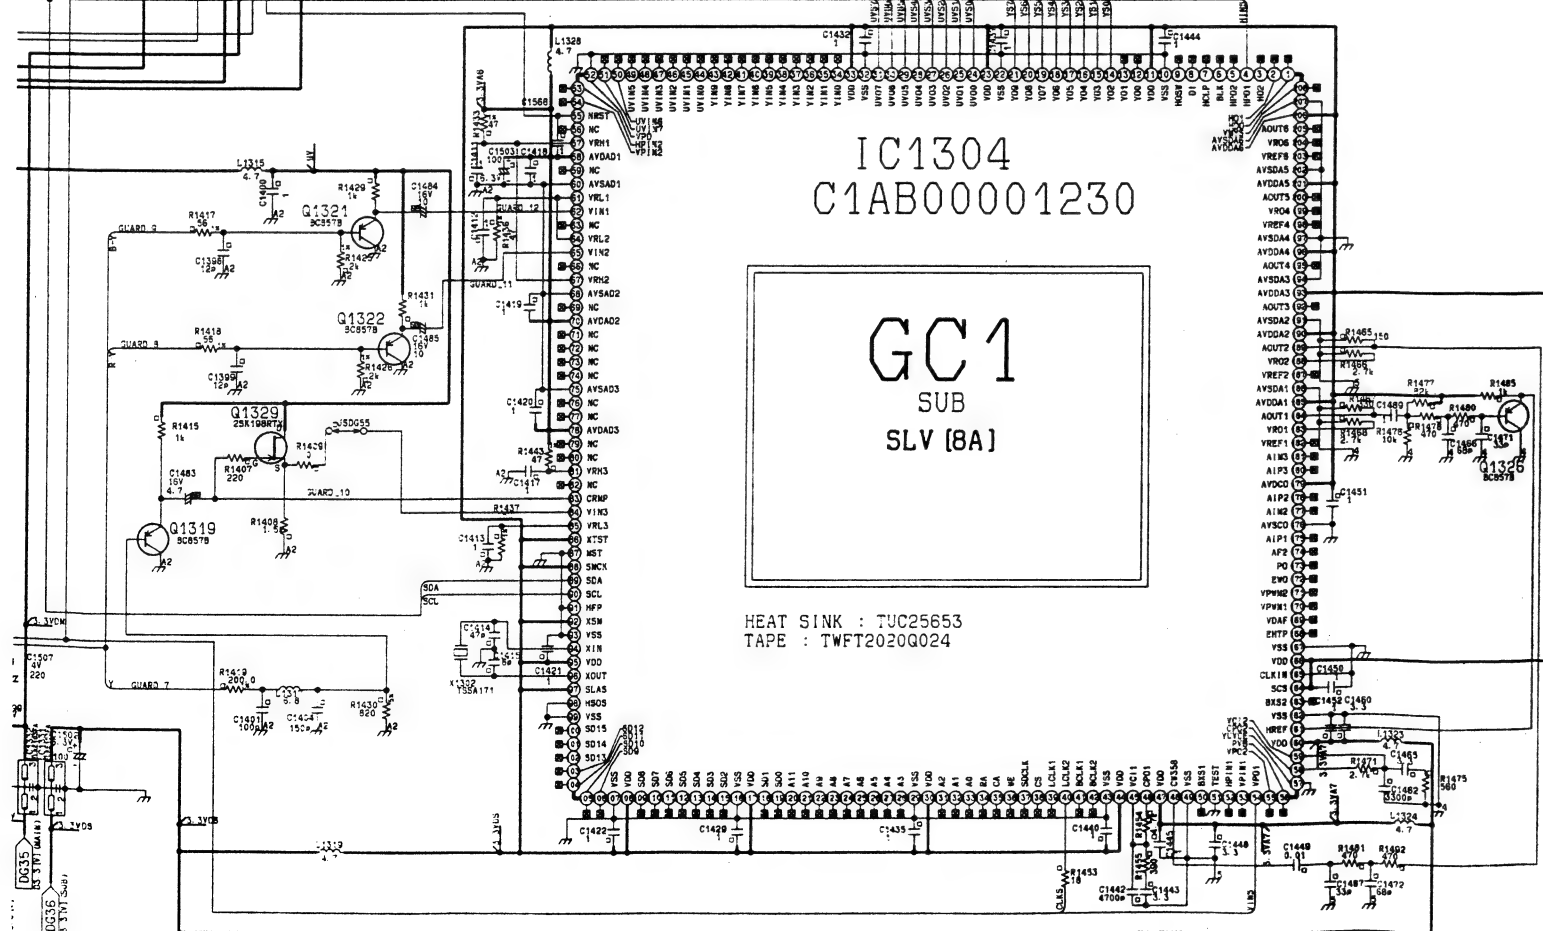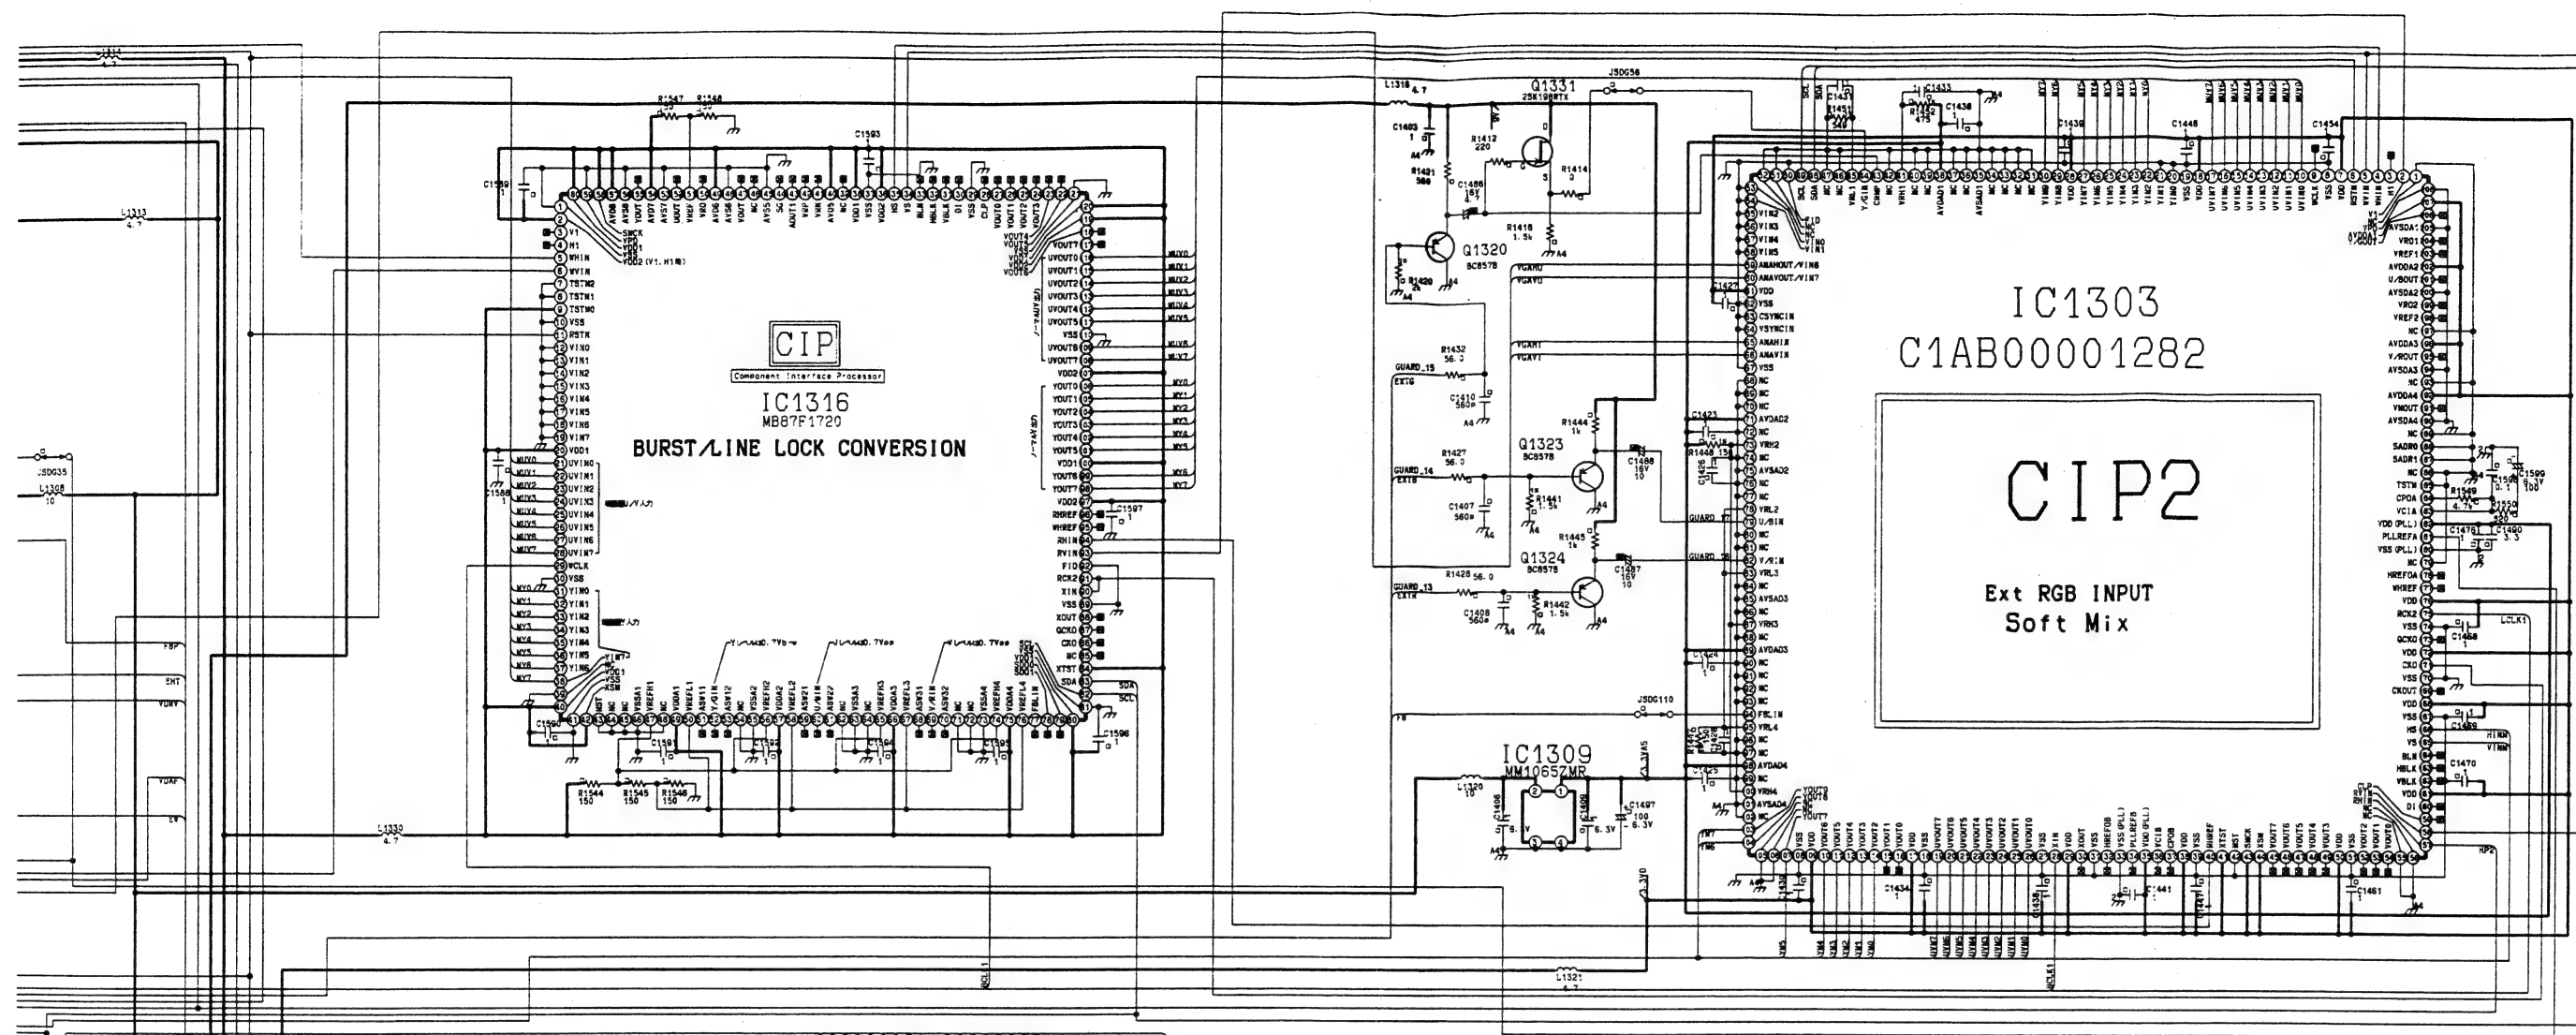



DG BOARD
TNPA1965

D BOARD
TNP0349

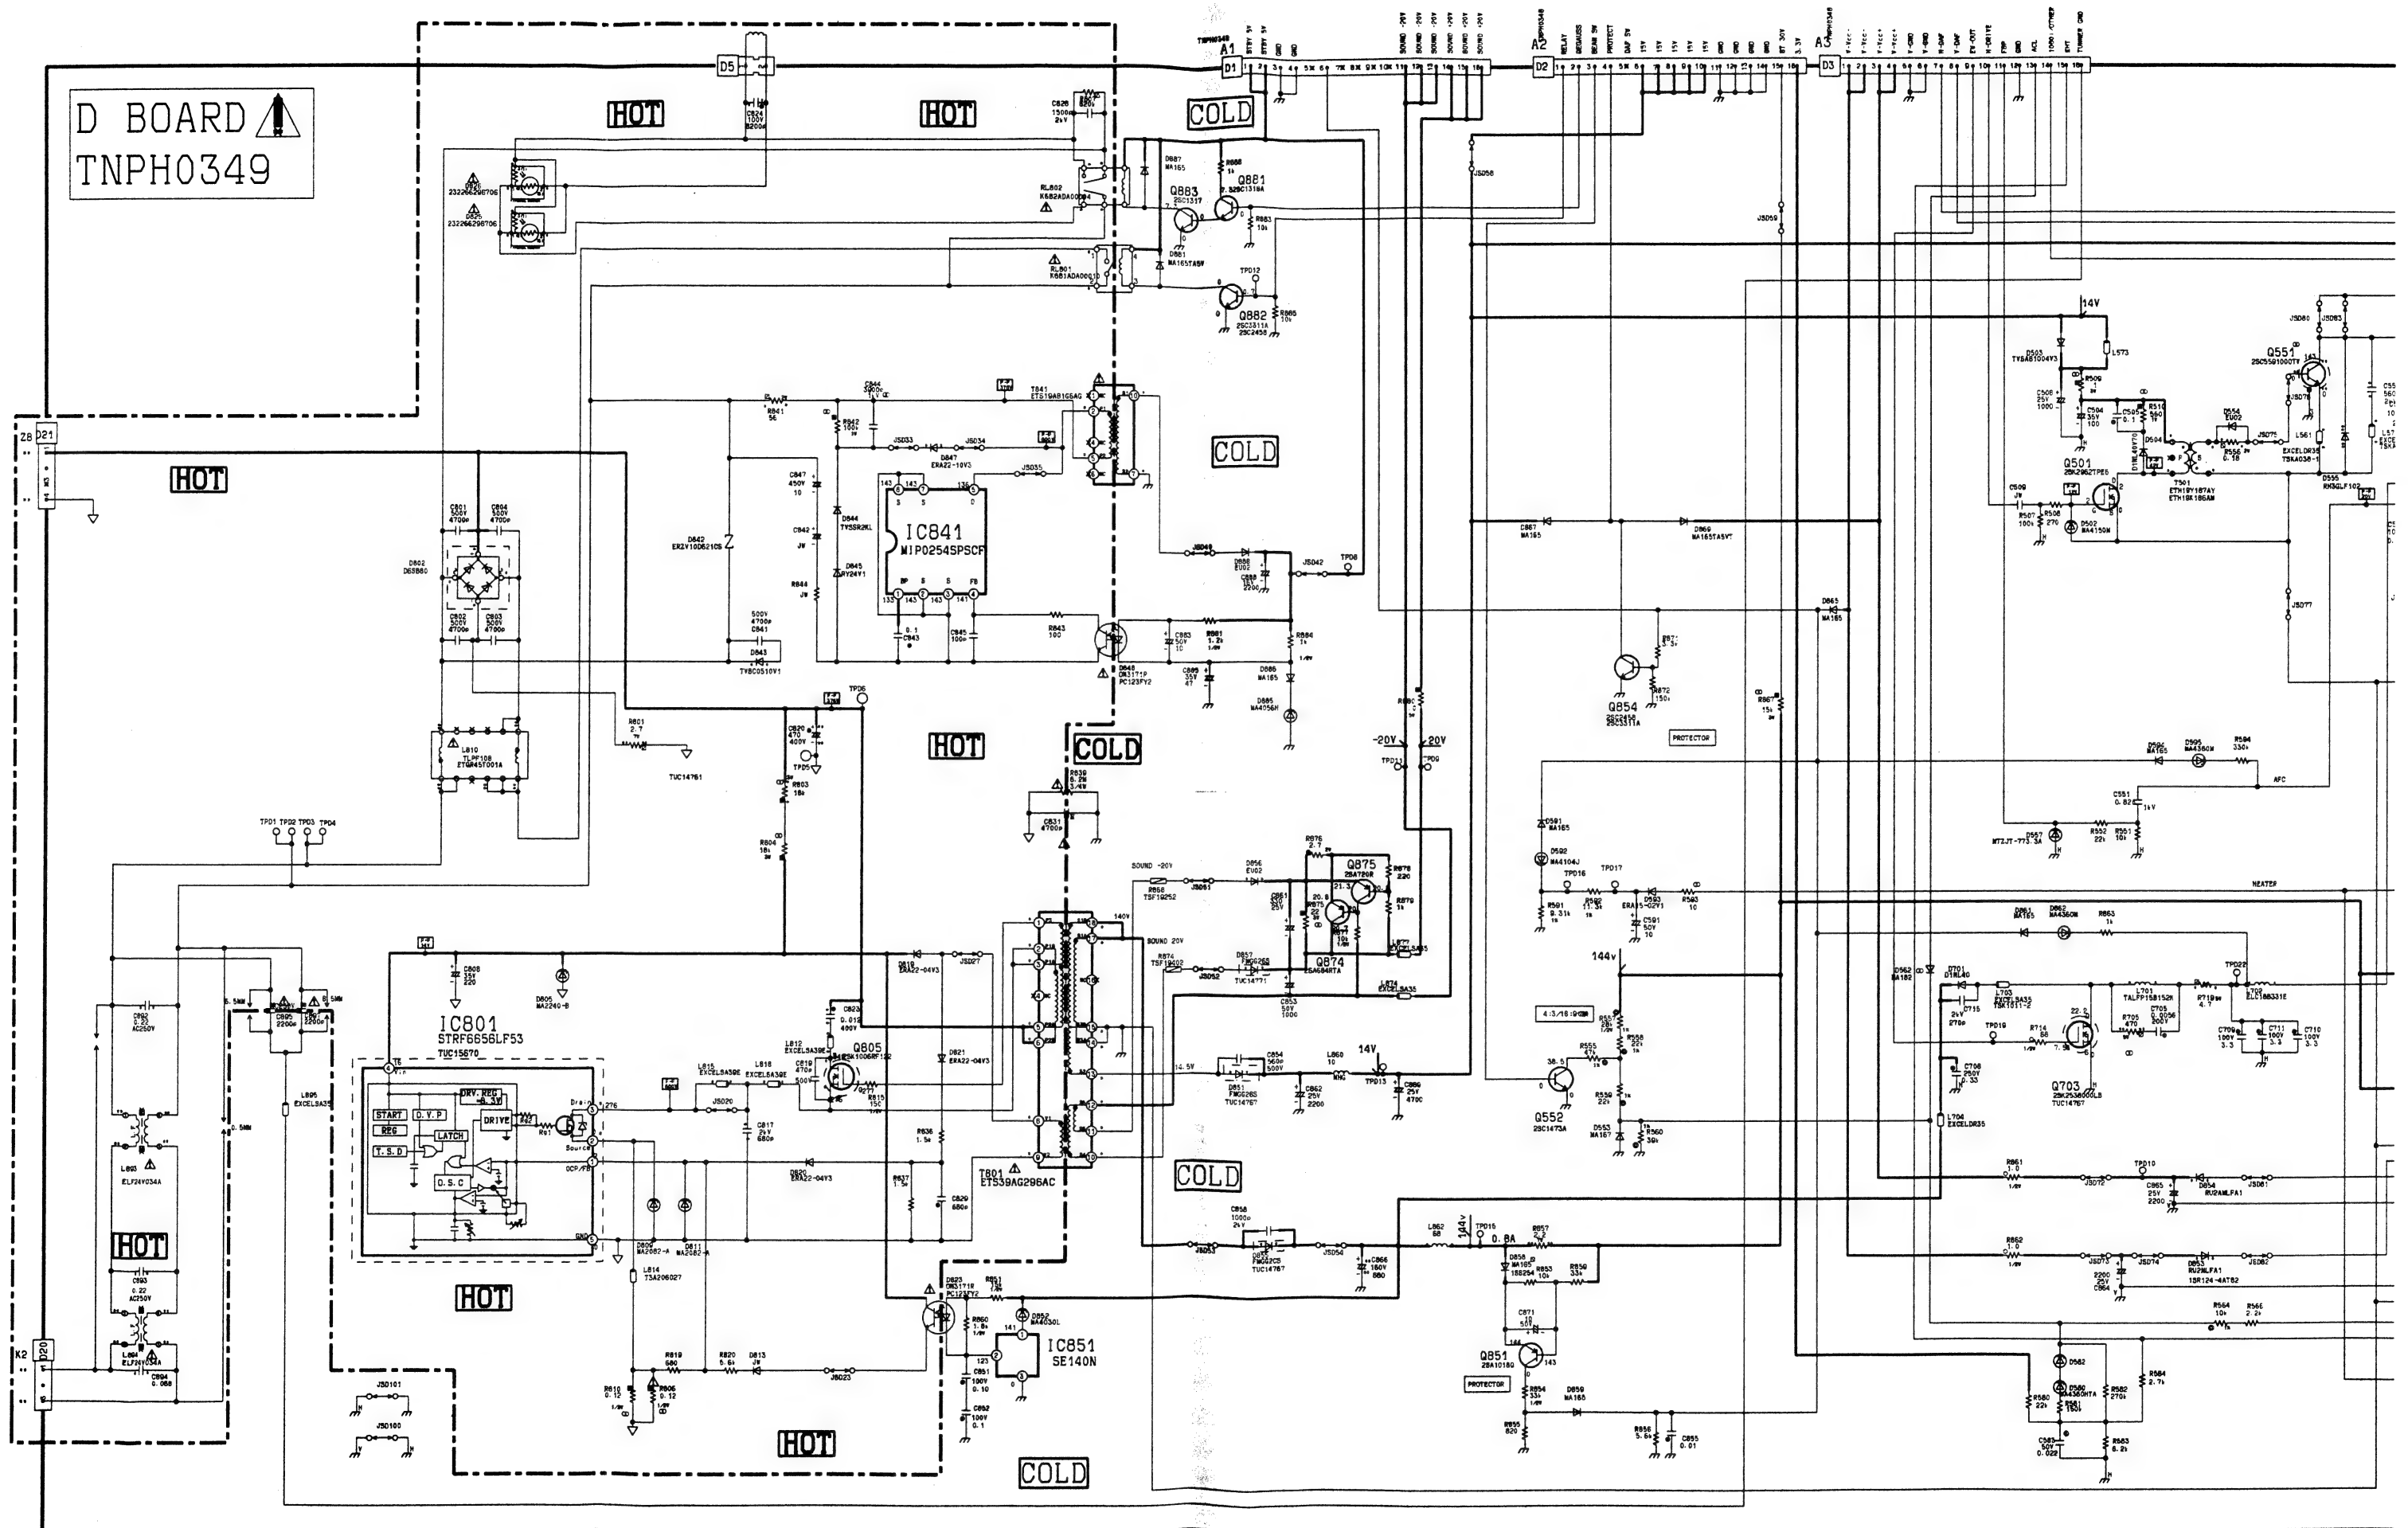

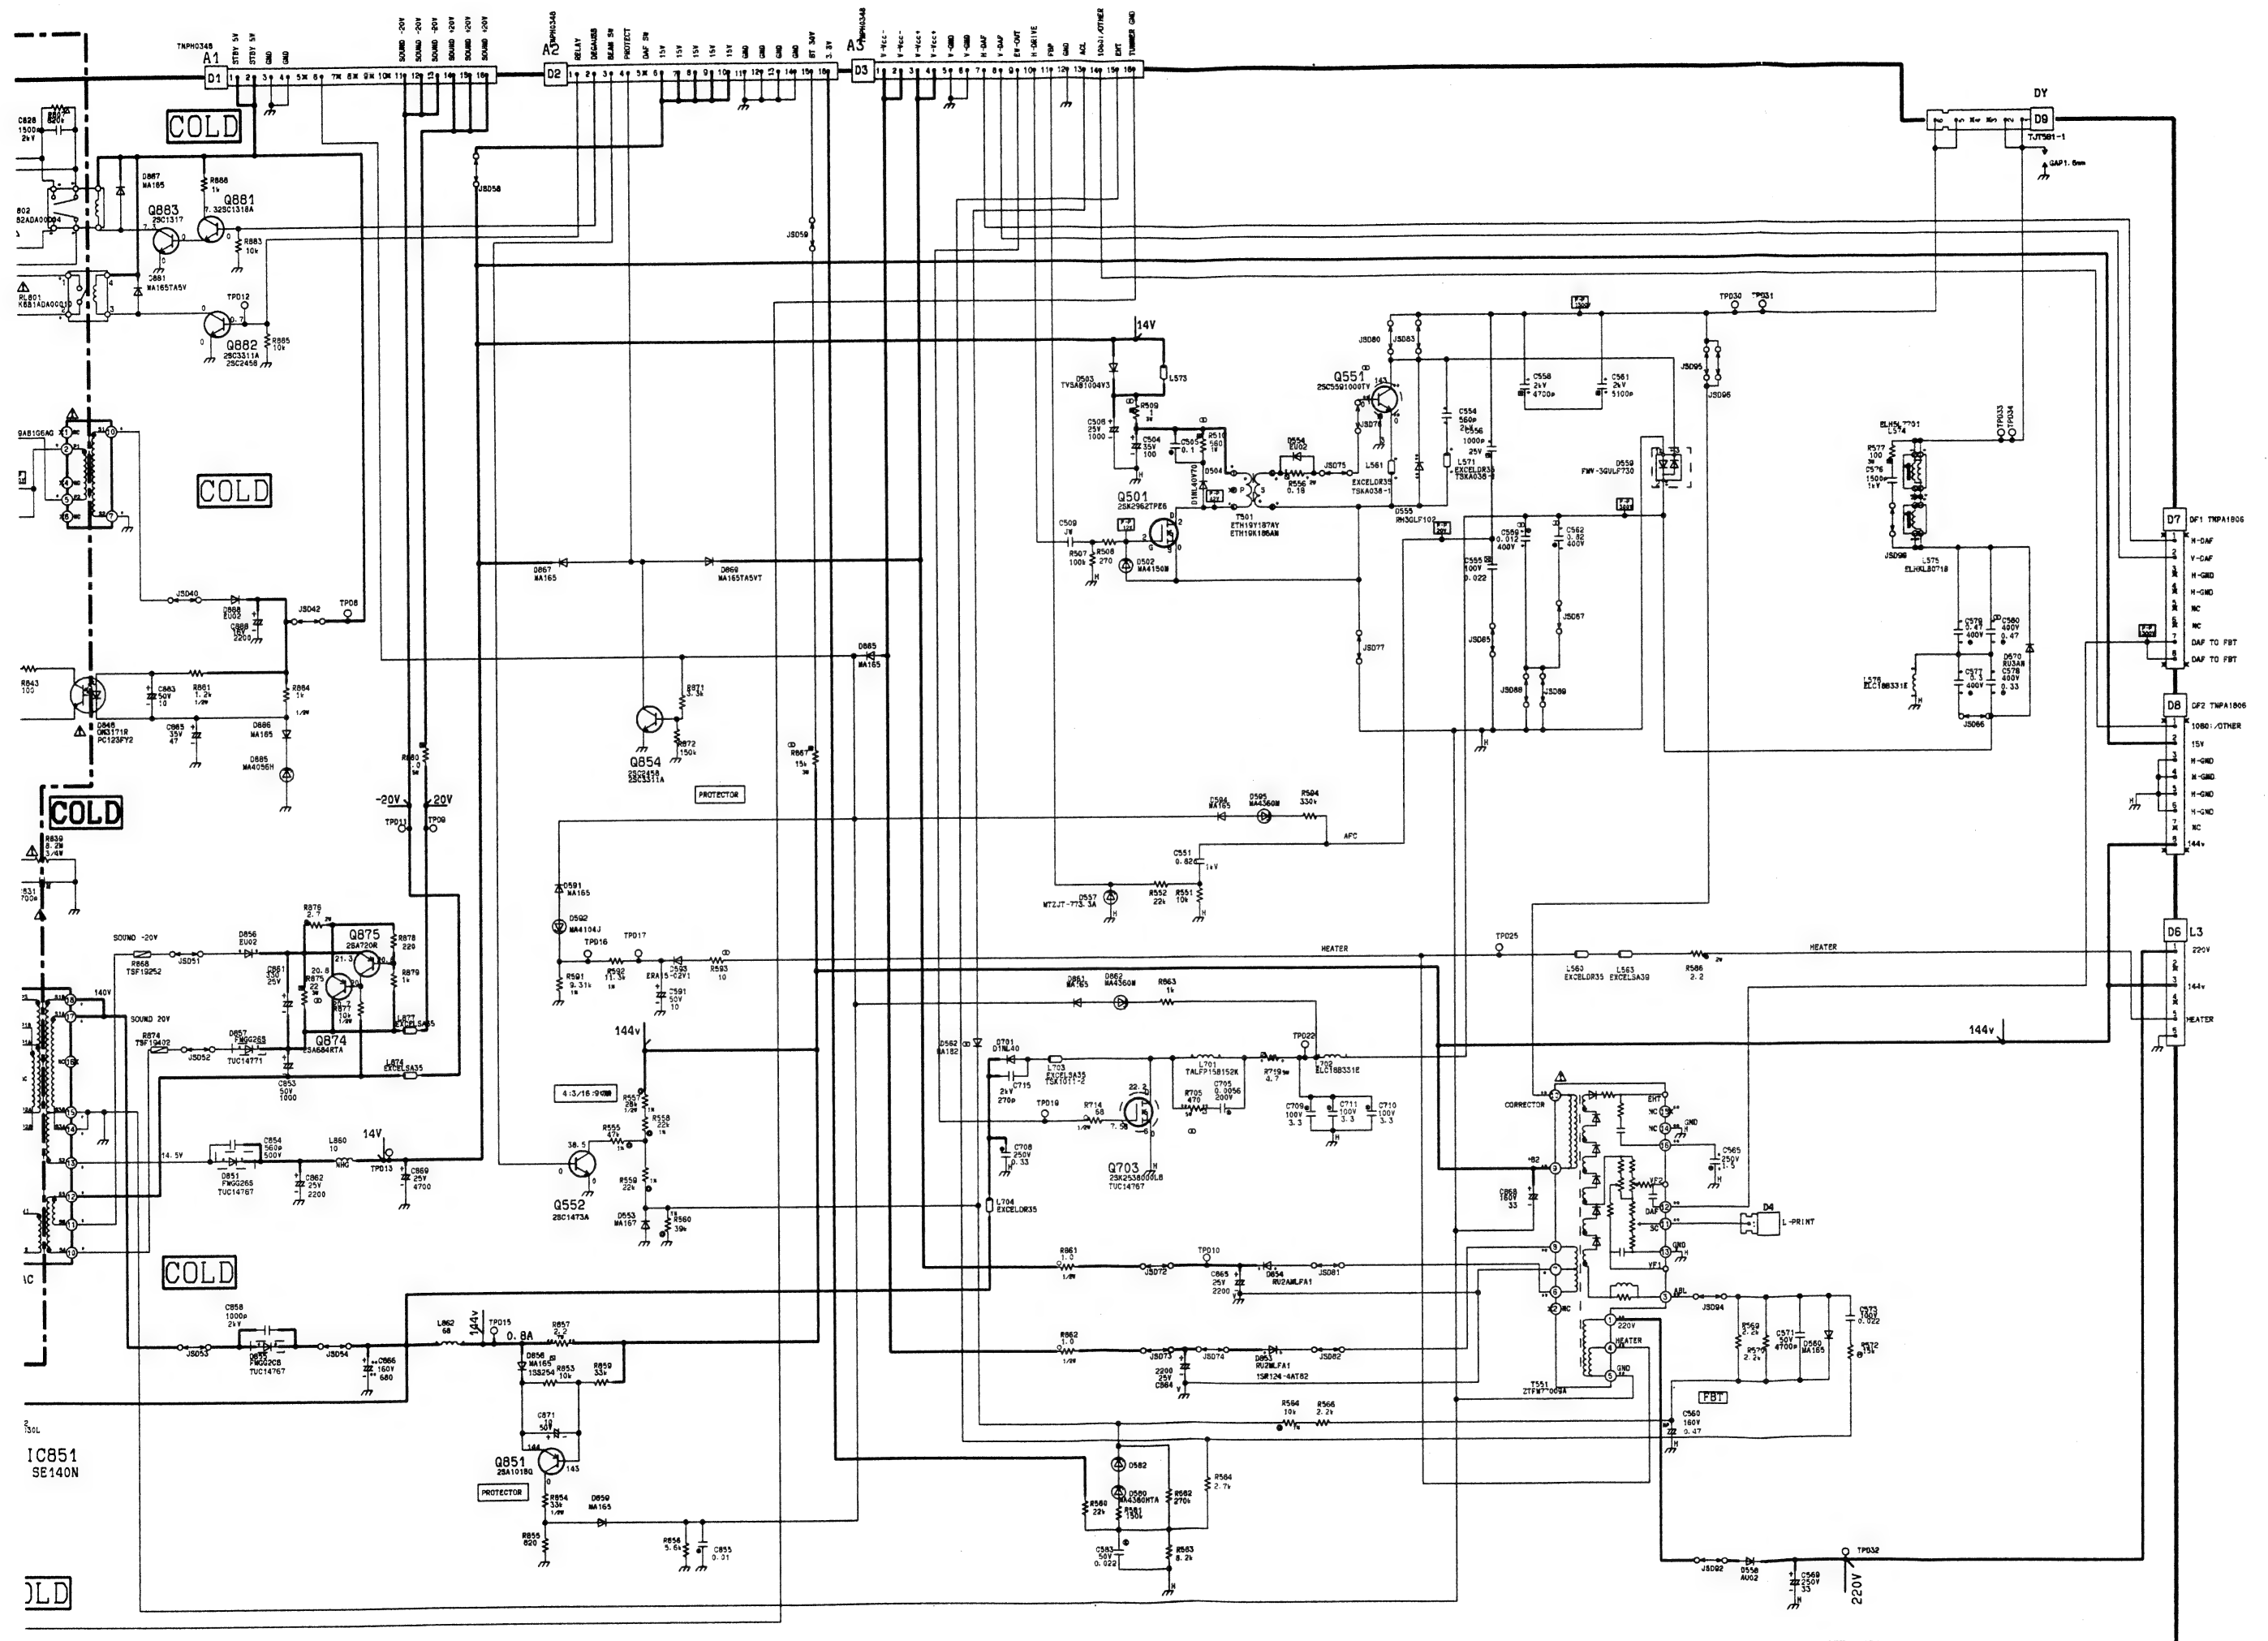


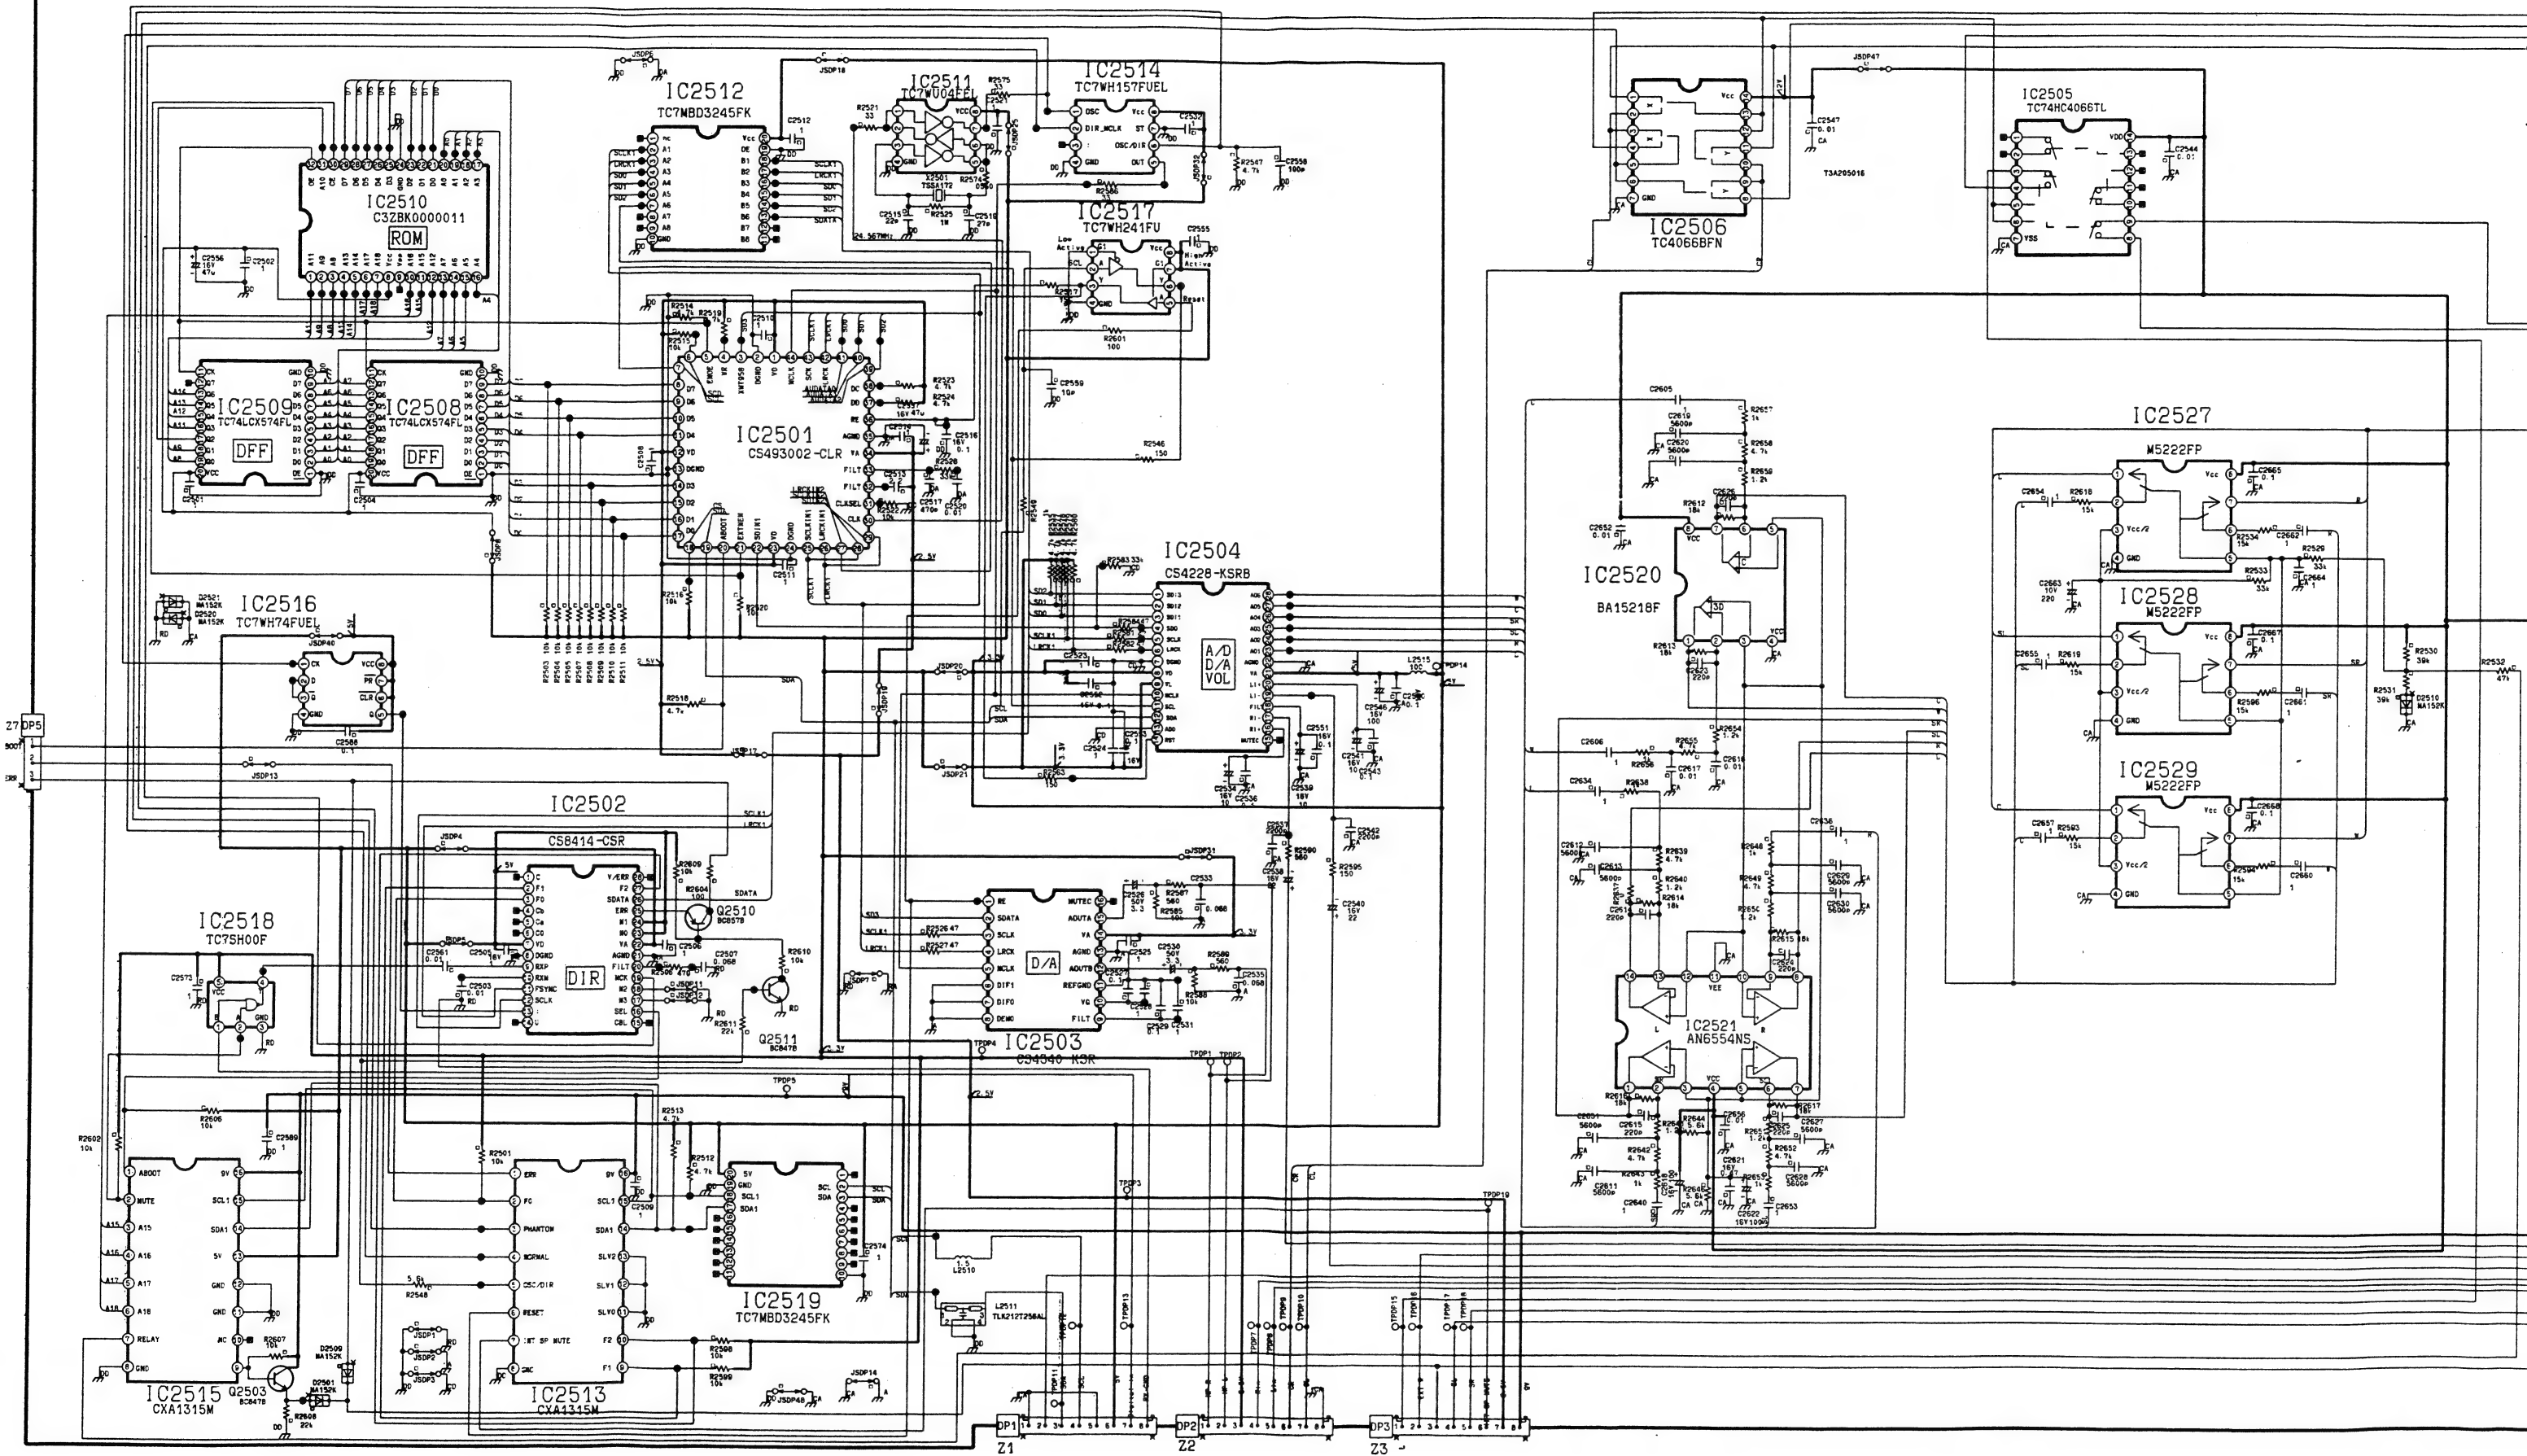

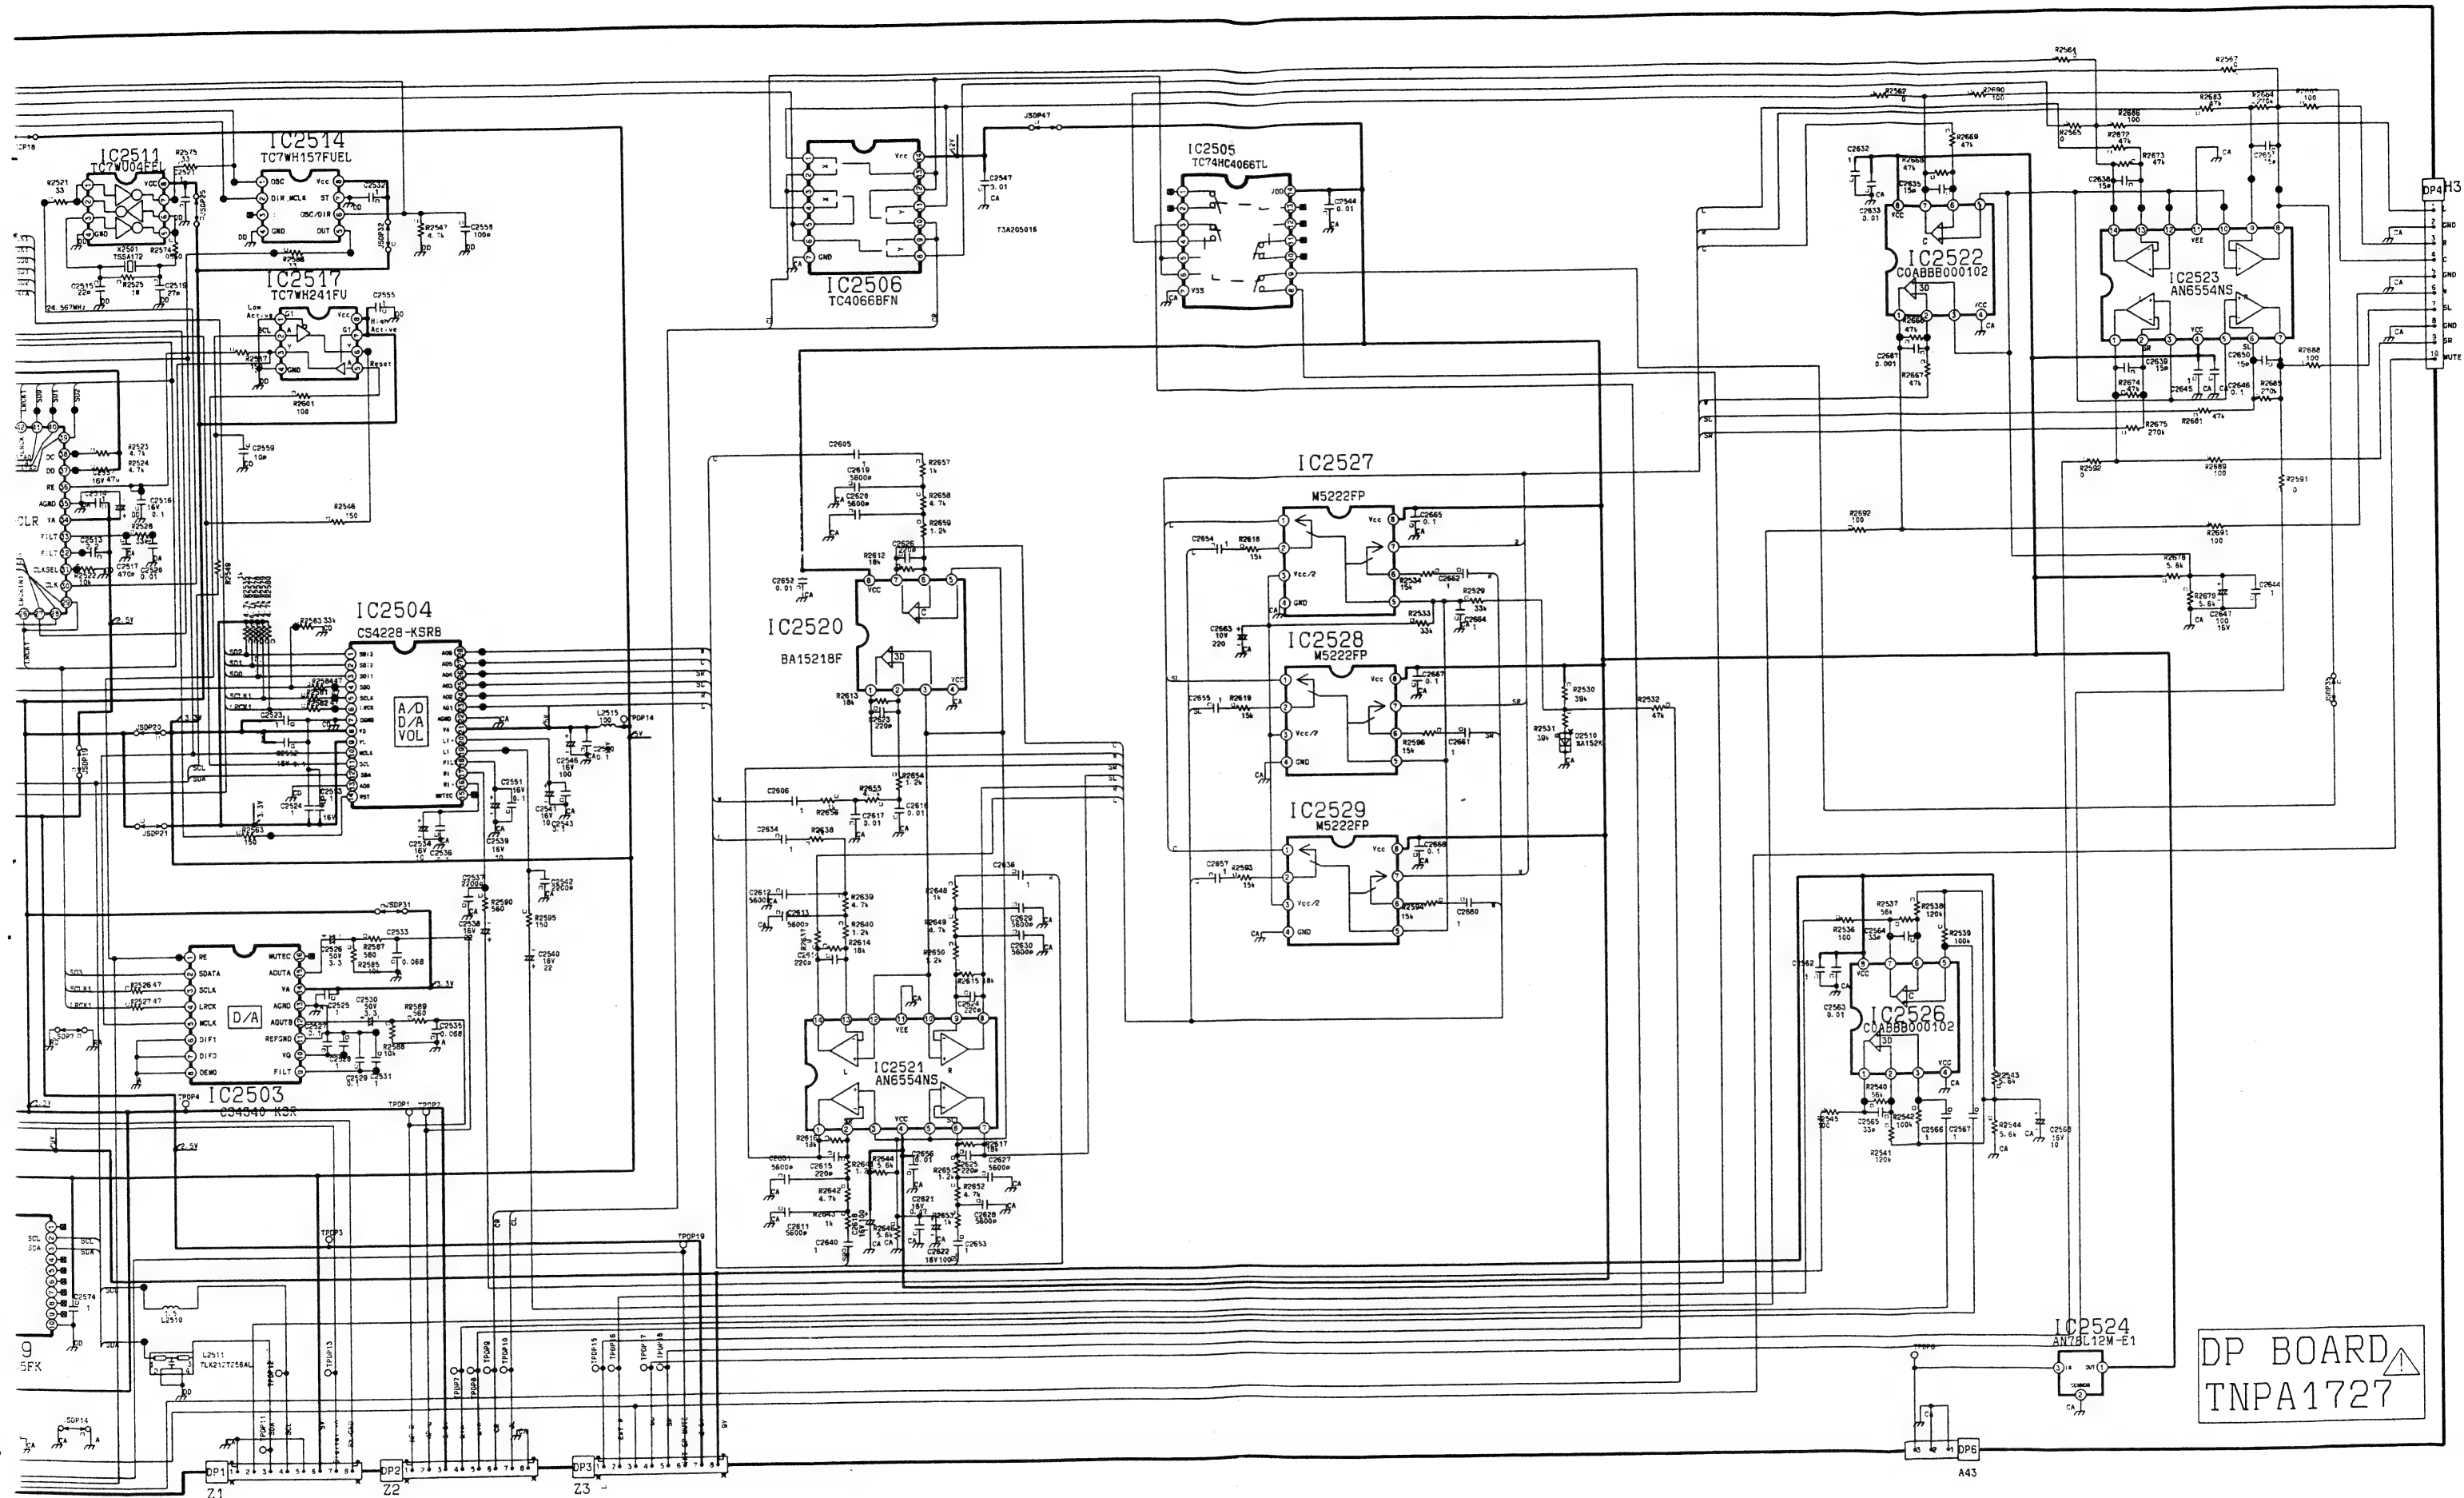


SCHEMA - Z


Z BOARD
TNPA1739

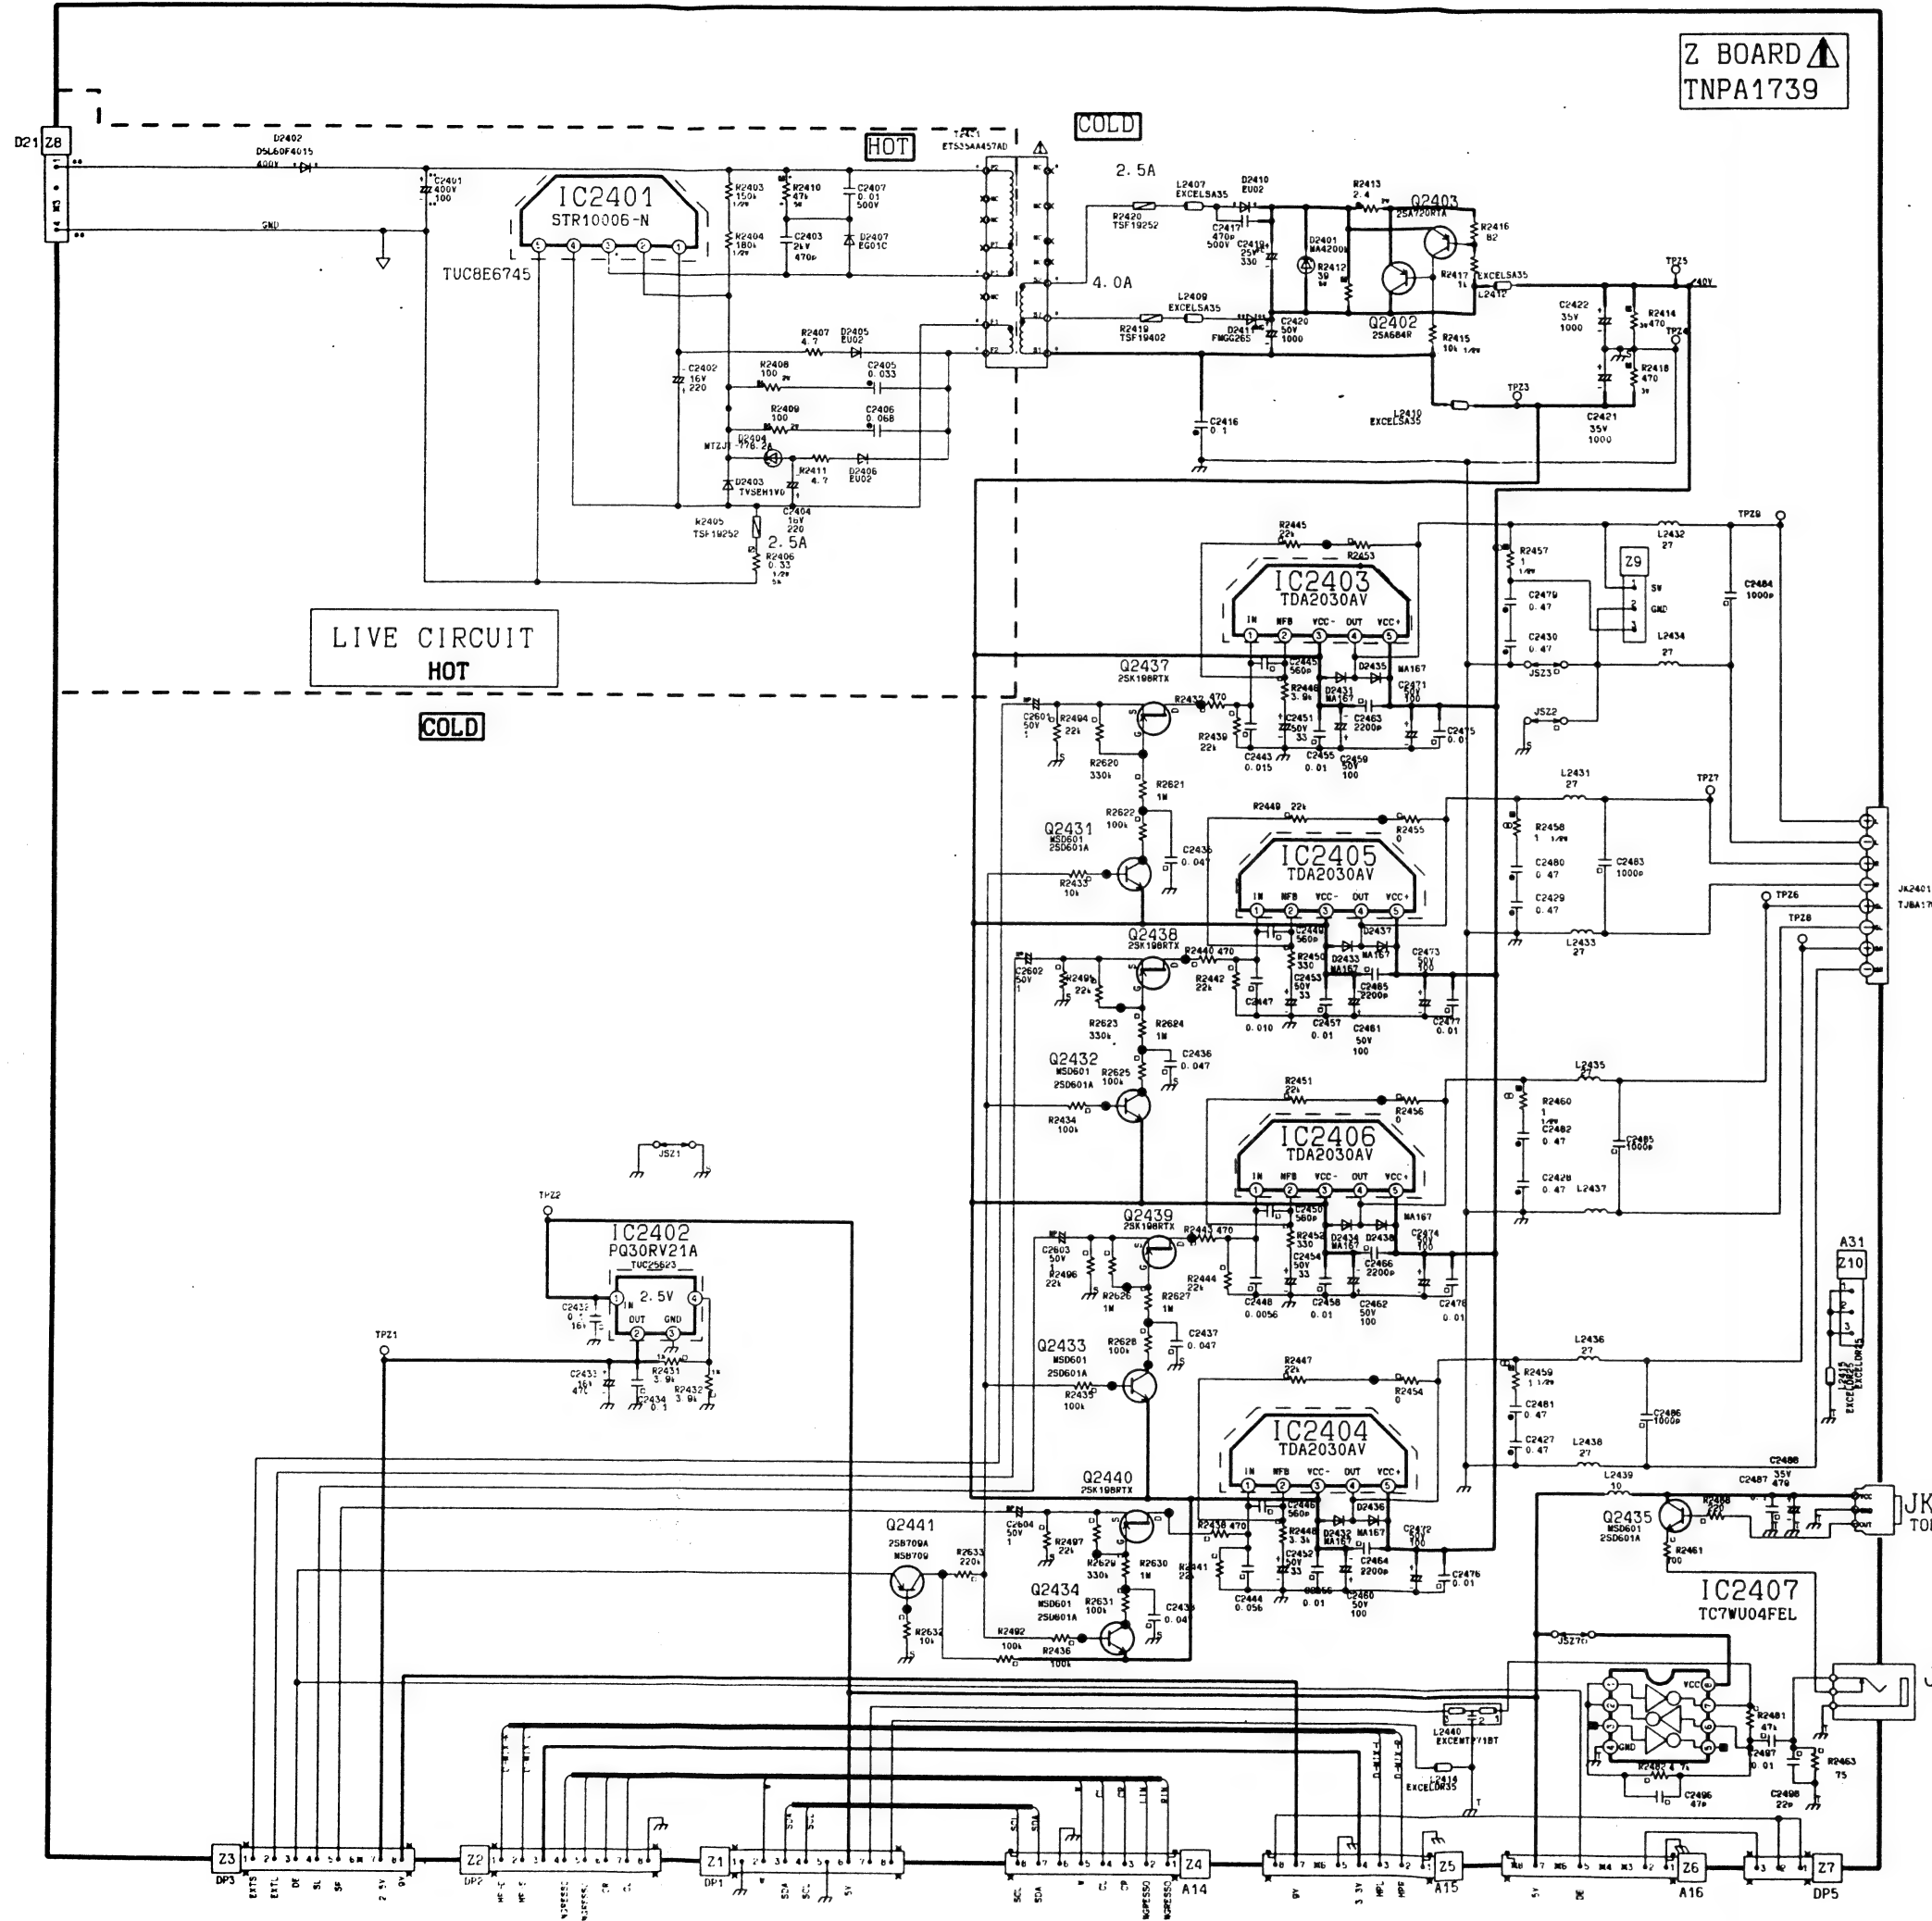


SCHEMA - L

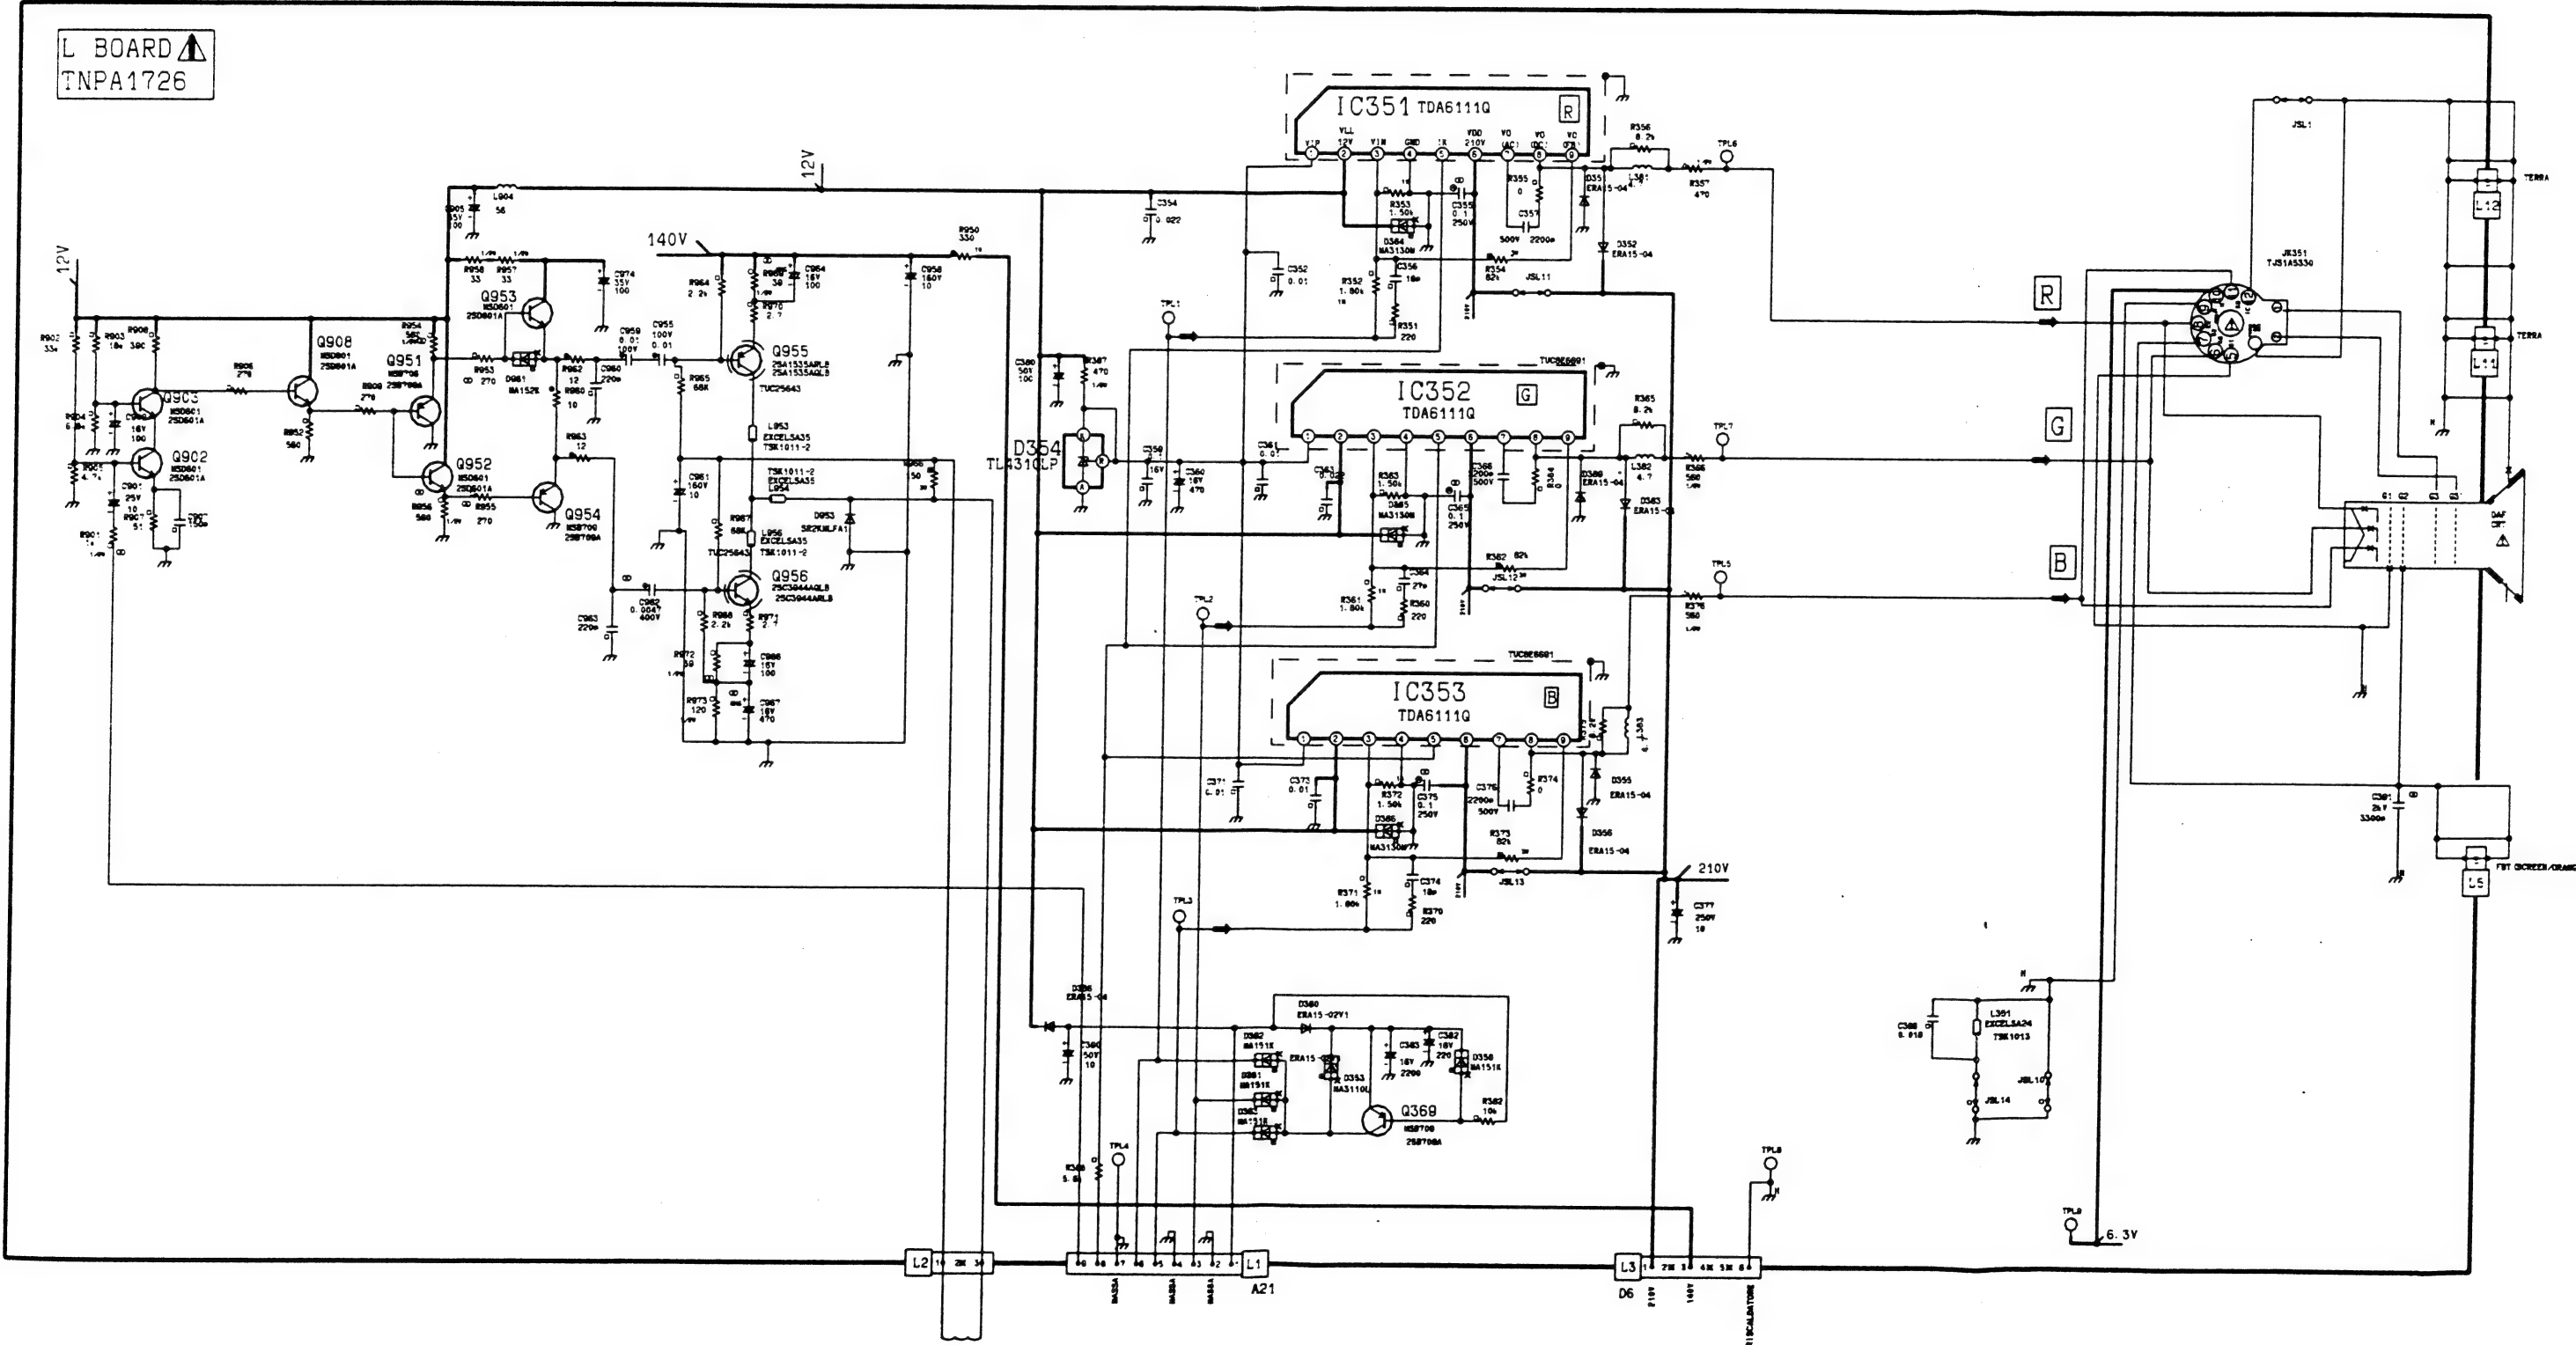



SCHEMA -H

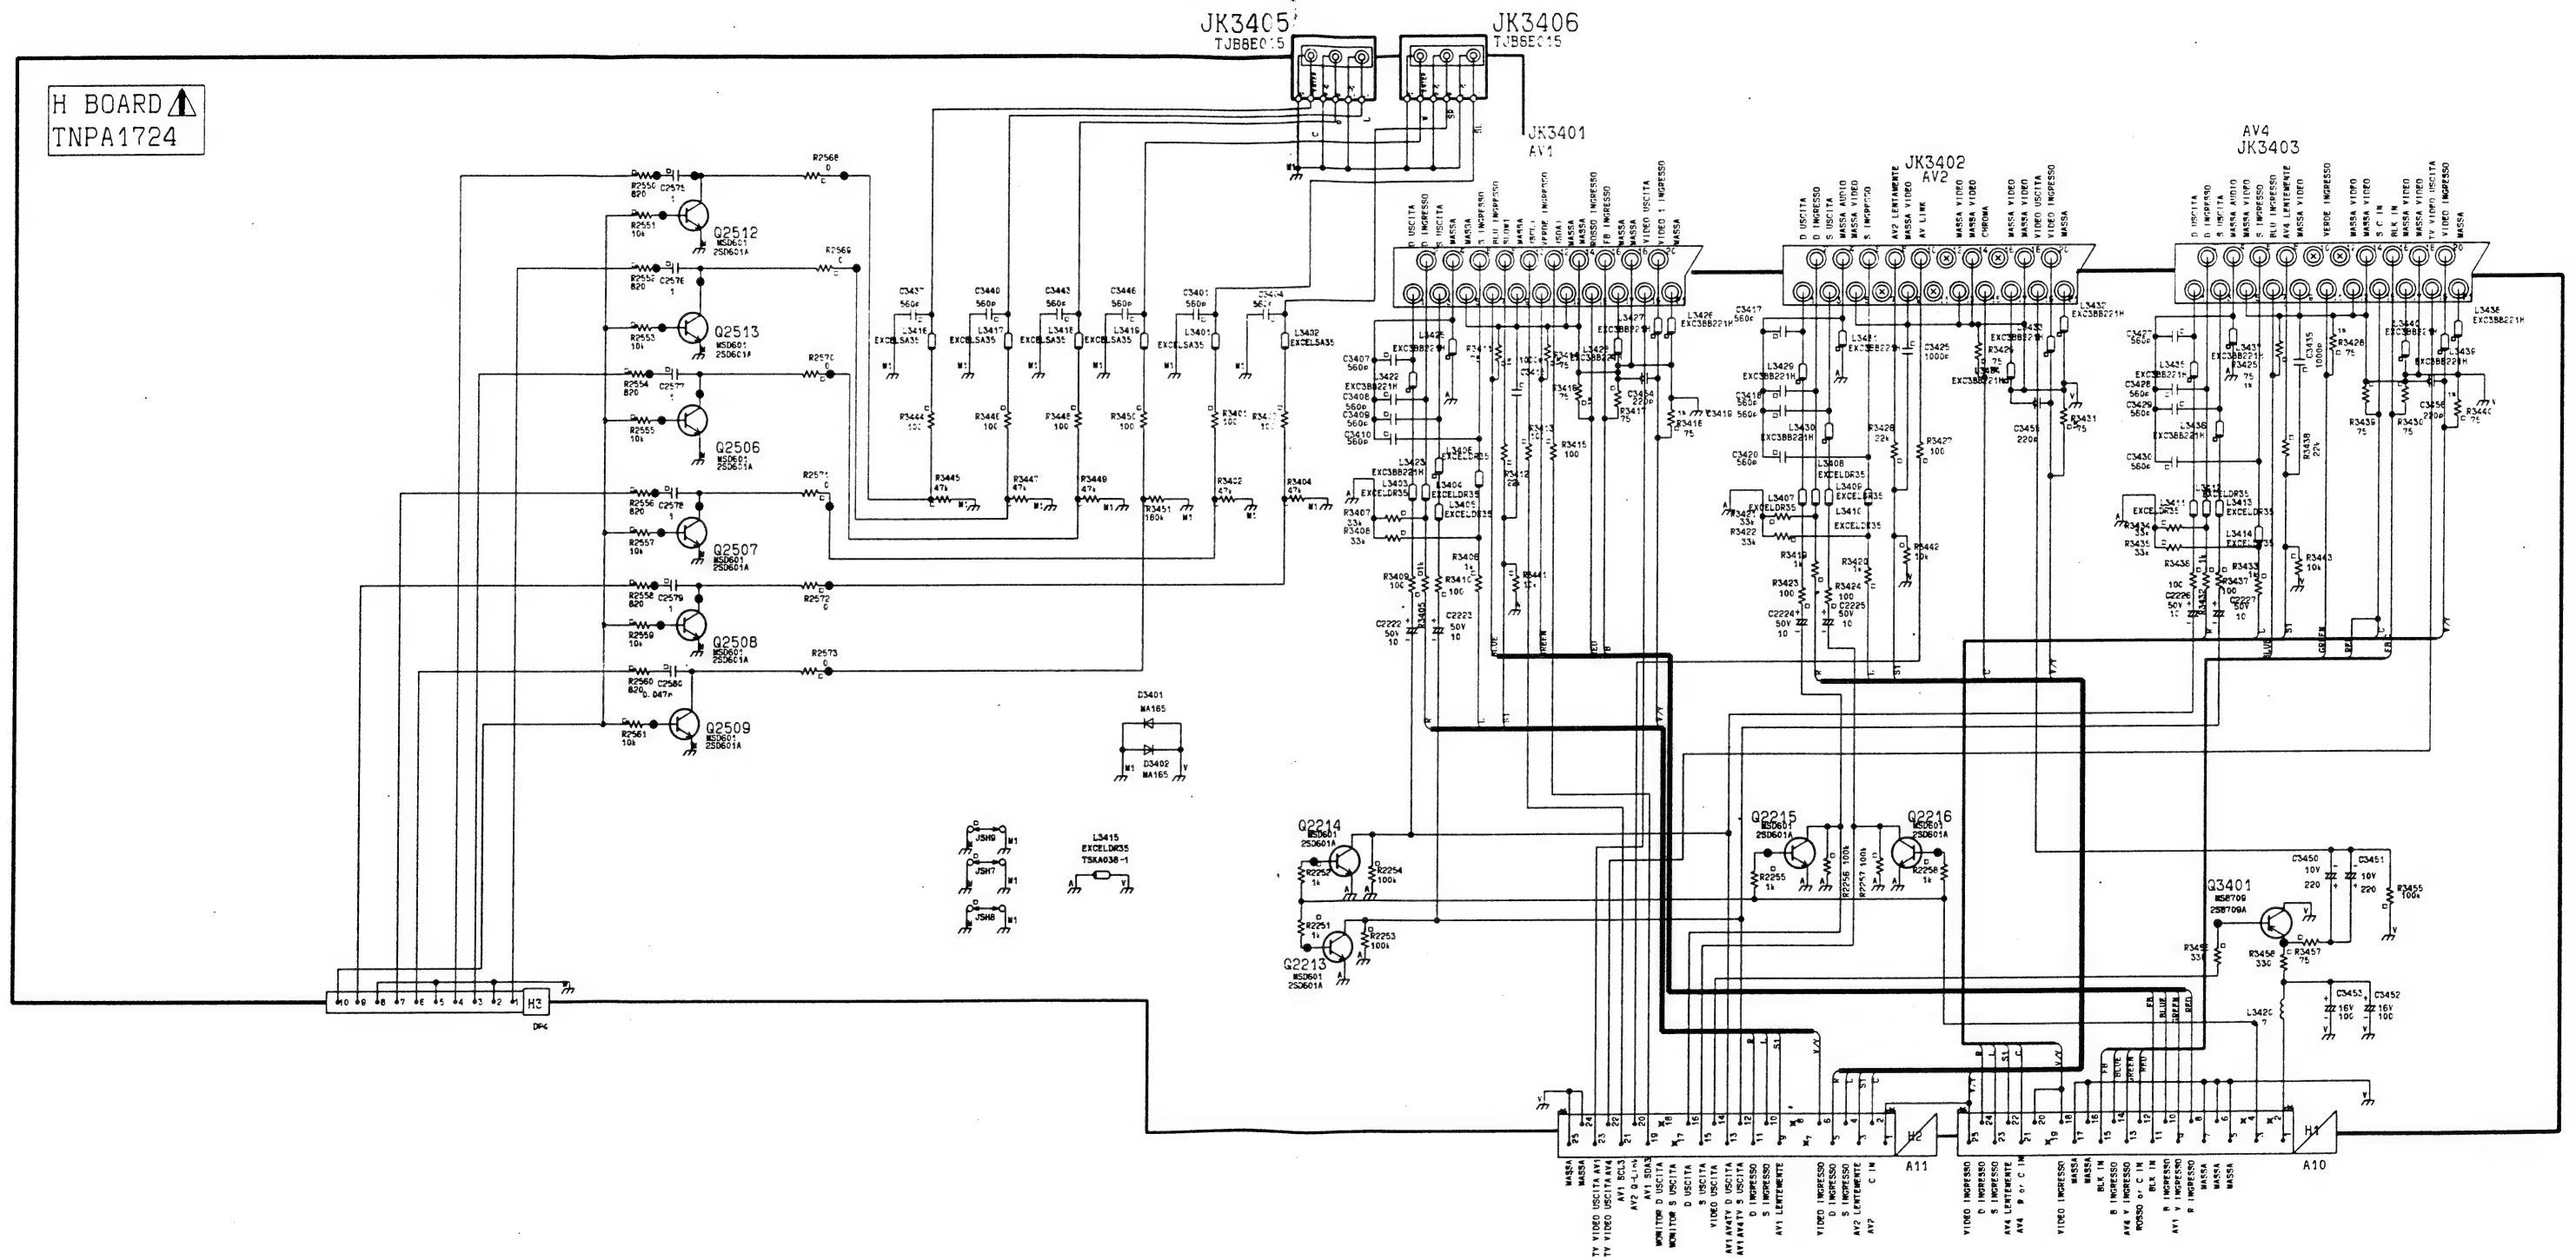

SCHEMA -G

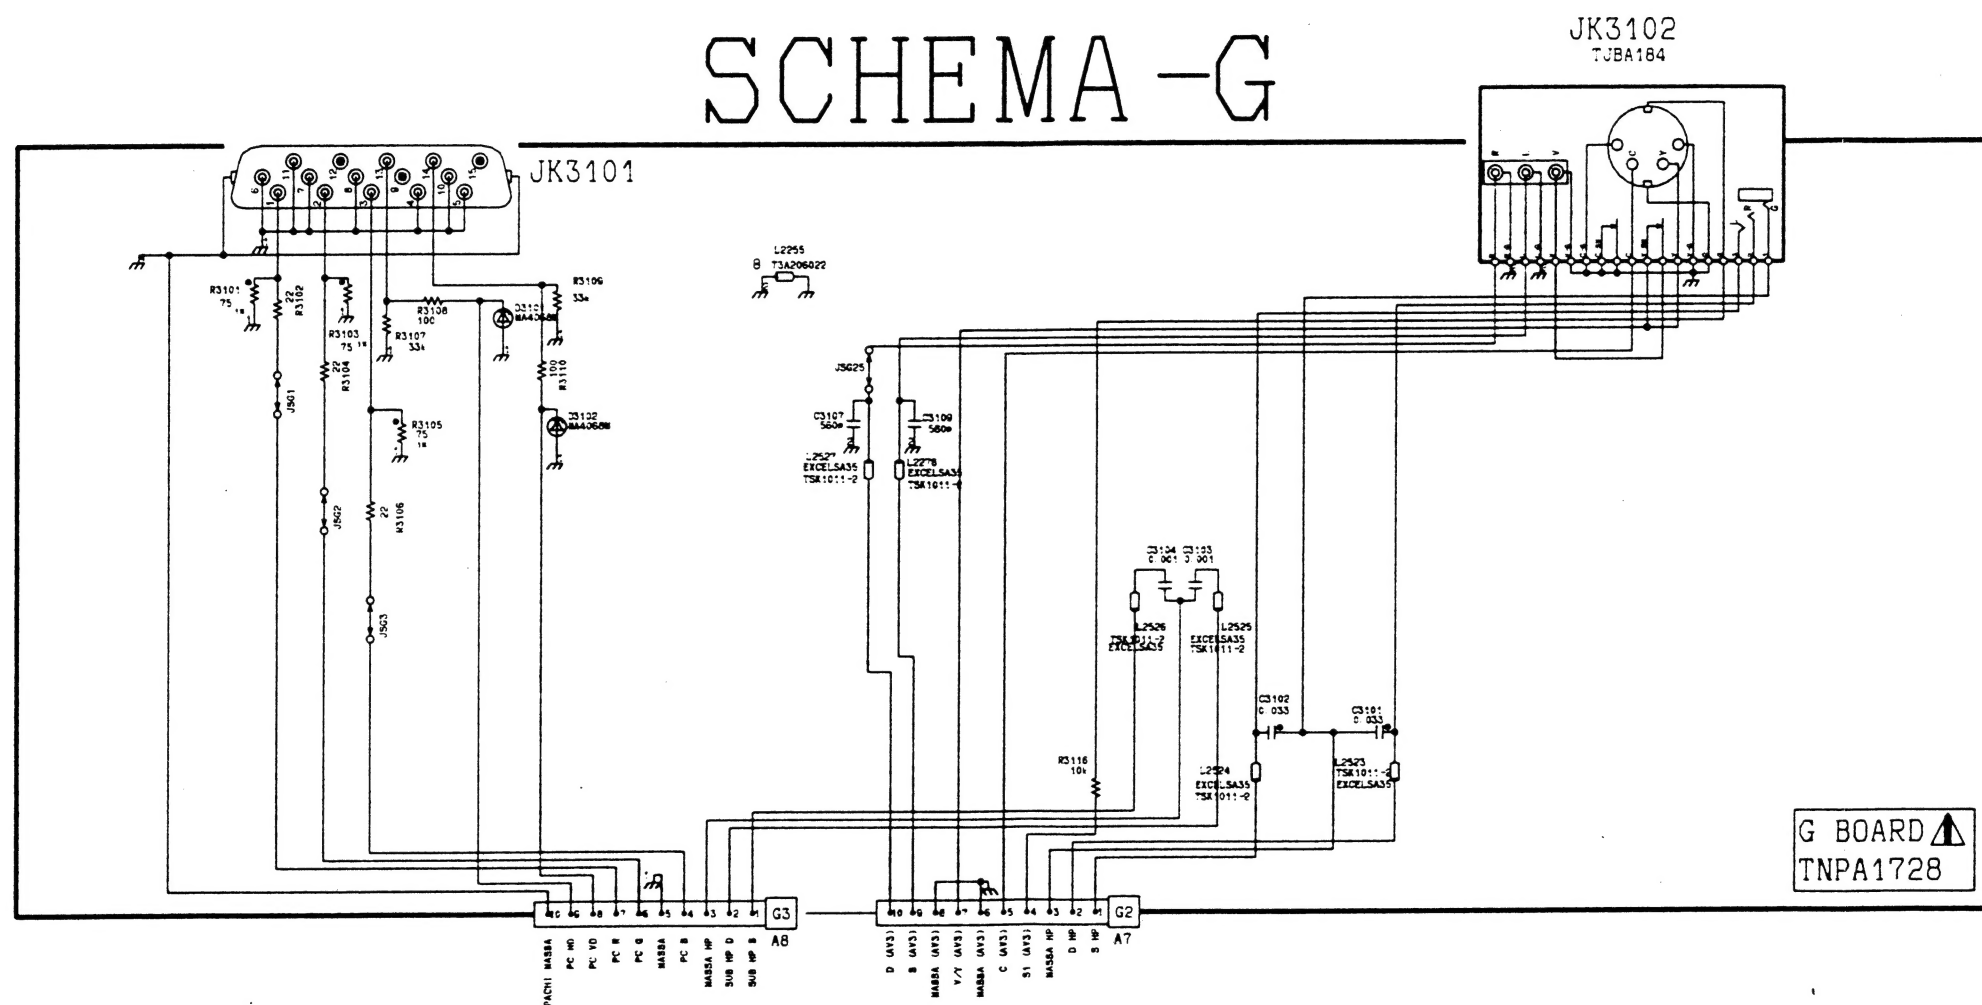


HOME 10 50 78 WELUX 508 SW2290010 3

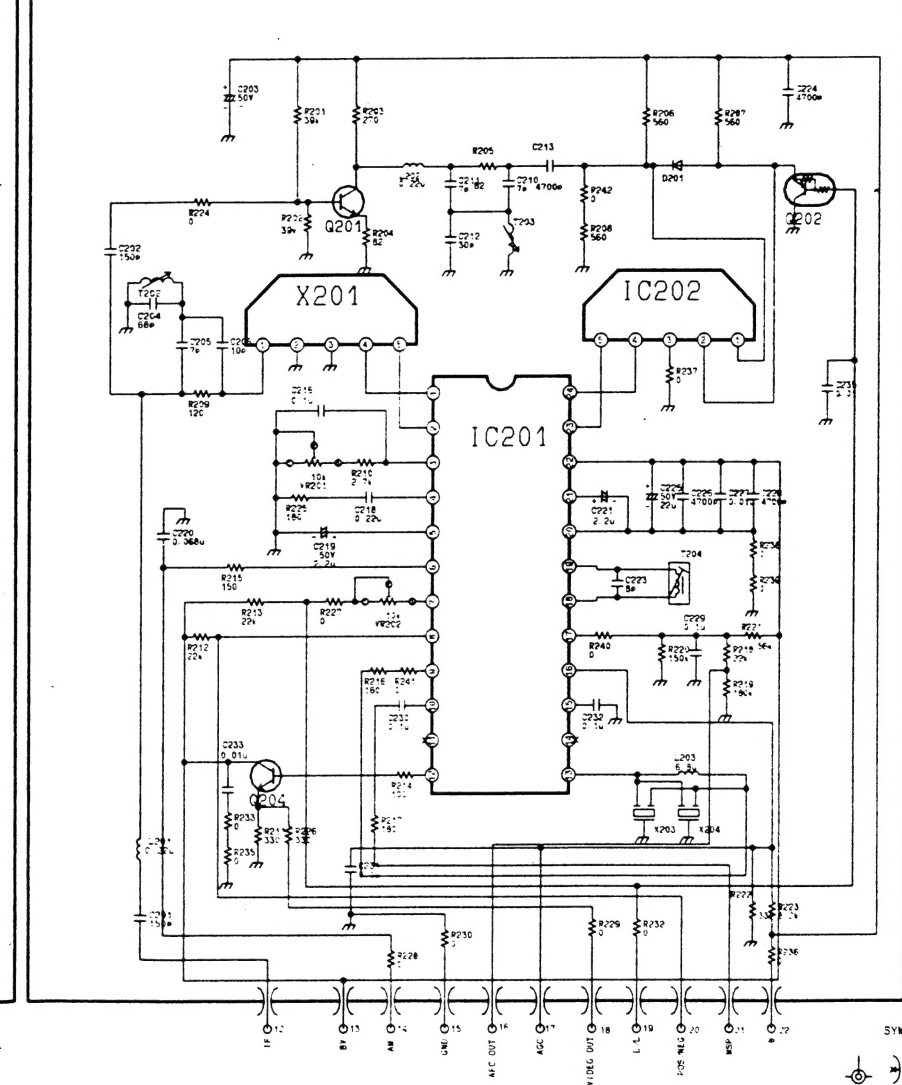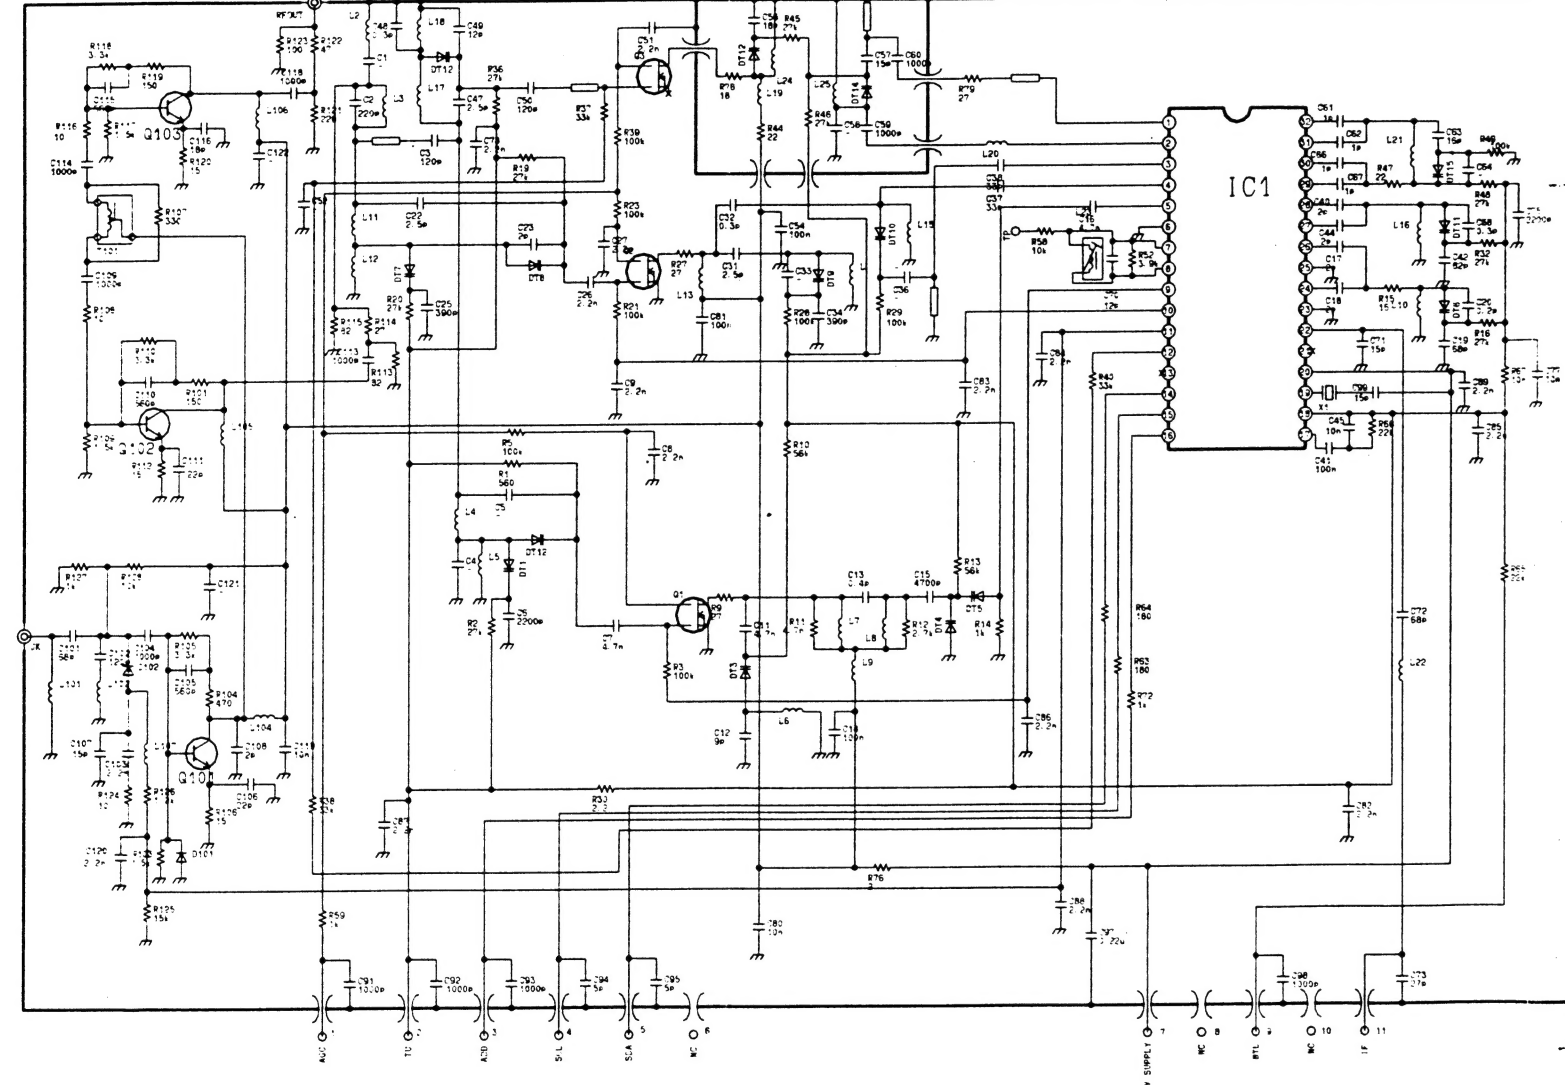

TERMINAL NO.	TERMINAL NAME	5.0VDC VOLTAGE	V
		POS	POS
		NEG	SUPPLY
1	AGC	0.0	MAX
2	TL	_____	
3	ADC	_____	
4	SL	_____	
5	SDA	_____	
6	MC	_____	
7	VDC	+5.0	
8	MC	_____	
9	BTX	+30.0	
10	MC	_____	
11	IF	_____	
12	IF	_____	
13	BY	+5.0	
14	AB	_____	
15	SLC	_____	
16	AFT OUT	_____	
17	ALC	_____	
18	VDC OUT	_____	
19	0.5	0.1V/0.10	
20	POS NEG	POS 1.0 NEG 1V	
21	NEG	_____	
22	B	5.0V	

SYMBOL		
SYMBOL	SYMBOL NO.	SEMICONDUCTOR
	R1-R79, R101-R128.	
	R201-R243	
	RESISTANCE	
	EXCEPT 4.0-11.5, 22, 24, 26, 31, 33, 35, 41, 43, 50, 51, 53-55, 60-62, 68, 71, 73, 75, 77, 102, 111	
	C1-C122, C201 - C235	
	CAPACITANCE	
	EXCEPT 10, 11, 24, 26, 30, 35, 36, 43, 46, 53, 55, 66, 68, 74, 75, 79, 80, 86, 106, 112, 117, 207-209, 214, 215, 217, 220, 234	
	L2-L25, L101-L107	
	L201-L203	
	DIODES	
	EXCEPT 153	
	DT1-4, 6	1A702, BA2537A, 15K290 HF2508, HF2509
	DT11-12, 14	1A704, BA2535, 15K298 HF2308, 15K283
	DT101-15, 5, 8	BA2573, 1A702, 15K278 HF2208
	DT16, 122, 122	BA2571
	2T-25	BD14, HF24, 58K6P1
	2T	BF404, BF405, HF2271
	2T1-120	BF7
	2T2	58K381
	2T-4	58K1728
	6X4	
	6X5	
	6X6	
	6X7	
	6X8	
	6X9	
	6X10	
	6X11	
	6X12	
	6X13	
	6X14	
	6X15	
	6X16	
	6X17	
	6X18	
	6X19	
	6X20	
	6X21	
	6X22	
	6X23	
	6X24	
	6X25	
	6X26	
	6X27	
	6X28	
	6X29	
	6X30	
	6X31	
	6X32	
	6X33	
	6X34	
	6X35	
	6X36	
	6X37	
	6X38	
	6X39	
	6X40	
	6X41	
	6X42	
	6X43	
	6X44	
	6X45	
	6X46	
	6X47	
	6X48	
	6X49	
	6X50	
	6X51	
	6X52	
	6X53	
	6X54	
	6X55	
	6X56	
	6X57	
	6X58	
	6X59	
	6X60	
	6X61	
	6X62	
	6X63	
	6X64	
	6X65	
	6X66	
	6X67	
	6X68	
	6X69	
	6X70	
	6X71	
	6X72	
	6X73	
	6X74	
	6X75	
	6X76	
	6X77	
	6X78	
	6X79	
	6X80	
	6X81	
	6X82	
	6X83	
	6X84	
	6X85	
	6X86	
	6X87	
	6X88	
	6X89	
	6X90	
	6X91	
	6X92	
	6X93	
	6X94	
	6X95	
	6X96	
	6X97	
	6X98	
	6X99	
	6X100	
	6X101	
	6X102	
	6X103	
	6X104	
	6X105	
	6X106	
	6X107	
	6X108	
	6X109	
	6X110	
	6X111	
	6X112	
	6X113	
	6X114	
	6X115	
	6X116	
	6X117	
	6X118	
	6X119	
	6X120	
	6X121	
	6X122	
	6X123	
	6X124	
	6X125	
	6X126	
	6X127	
	6X128	
	6X129	
	6X130	
	6X131	
	6X132	
	6X133	
	6X134	
	6X135	
	6X136	
	6X137	
	6X138	
	6X139	
	6X140	
	6X141	
	6X142	
	6X143	
	6X144	
	6X145	
	6X146	
	6X147	
	6X148	
	6X149	
	6X150	
	6X151	
	6X152	
	6X153	
	6X154	
	6X155	
	6X156	
	6X157	
	6X158	
	6X159	
	6X160	
	6X161	
	6X162	
	6X163	
	6X164	
	6X165	
	6X166	
	6X167	
	6X168	
	6X169	
	6X170	
	6X171	
	6X172	
	6X173	
	6X174	
	6X175	
	6X176	
	6X177	
	6X178	
	6X179	
	6X180	
	6X181	
	6X182	
	6X183	
	6X184	
	6X185	
	6X186	
	6X187	
	6X188	
	6X189	
	6X190	
	6X191	
	6X192	
	6X193	
	6X194	
	6X195	
	6X196	
	6X197	
	6X198	
	6X199	
	6X200	
	6X201	
	6X202	
	6X203	
	6X204	
	6X205	
	6X206	
	6X207	
	6X208	
	6X209	
	6X210	
	6X211	
	6X212	
	6X213	
	6X214	
	6X215	
	6X216	
	6X217	
	6X218	
	6X219	
	6X220	
	6X221	
	6X222	
	6X223	
	6X224	
	6X225	
	6X226	
	6X227	
	6X228	
	6X229	
	6X230	
	6X231	
	6X232	
	6X233	
	6X234	
	6X235	
	6X236	
	6X237	
	6X238	
	6X239	
	6X240	
	6X241	
	6X242	
	6X243	
	6X244	
	6X245	
	6X246	
	6X247	
	6X248	
	6X249	
	6X250	
	6X251	
	6X252	
	6X253	
	6X254	
	6X255	
	6X256	
	6X257	
	6X258	
	6X259	
	6X260	
	6X261	
	6X262	
	6X263	
	6X264	
	6X265	
	6X266	
	6X267	
	6X268	
	6X269	
	6X270	
	6X271	
	6X272	
	6X273	
	6X274	
	6X275	
	6X276	
	6X277	
	6X278	
	6X279	
	6X280	
	6X281	
	6X282	
	6X283	
	6X284	
	6X285	
	6X286	
	6X287	
	6X288	
	6X289	
	6X290	
	6X291	
	6X292	
	6X293	
	6X294	
	6X295	
	6X296	
	6X297	
	6X298	
	6X299	
	6X300	
	6X301	
	6X302	
	6X303	
	6X304	
	6X305	
	6X306	
	6X307	
	6X308	
	6X309	
	6X310	
	6X311	
	6X312	
	6X313	
	6X314	
	6X315	
	6X316	
	6X317	
	6X318	
	6X319	
	6X320	
	6X321	
	6X322	
	6X323	
	6X324	
	6X325	
	6X326	
	6X327	
	6X328	
	6X329	
	6X330	
	6X331	
	6X332	
	6X333	
	6X334	
	6X335	
	6X336	
	6X337	
	6X338	
	6X339	
	6X340	
	6X341	
	6X342	
	6X343	
	6X344	
	6X345	
	6X346	
	6X347	
	6X348	
	6X349	
	6X350	
	6X351	
	6X352	
	6X353	
	6X354	
	6X355	
	6X356	
	6X357	
	6X358	
	6X359	
	6X360	
	6X361	
	6X362	
	6X363	
	6X364	
	6X365	
	6X366	
	6X367	
	6X368	
	6X369	
	6X370	
	6X371	
	6X372	
	6X373	
	6X374	
	6X375	
	6X376	
	6X377	
	6X378	
	6X379	
	6X380	
	6X381	
	6X382	
	6X383	
	6X384	
	6X385	
	6X386	
	6X387	

SCHEMA-DF

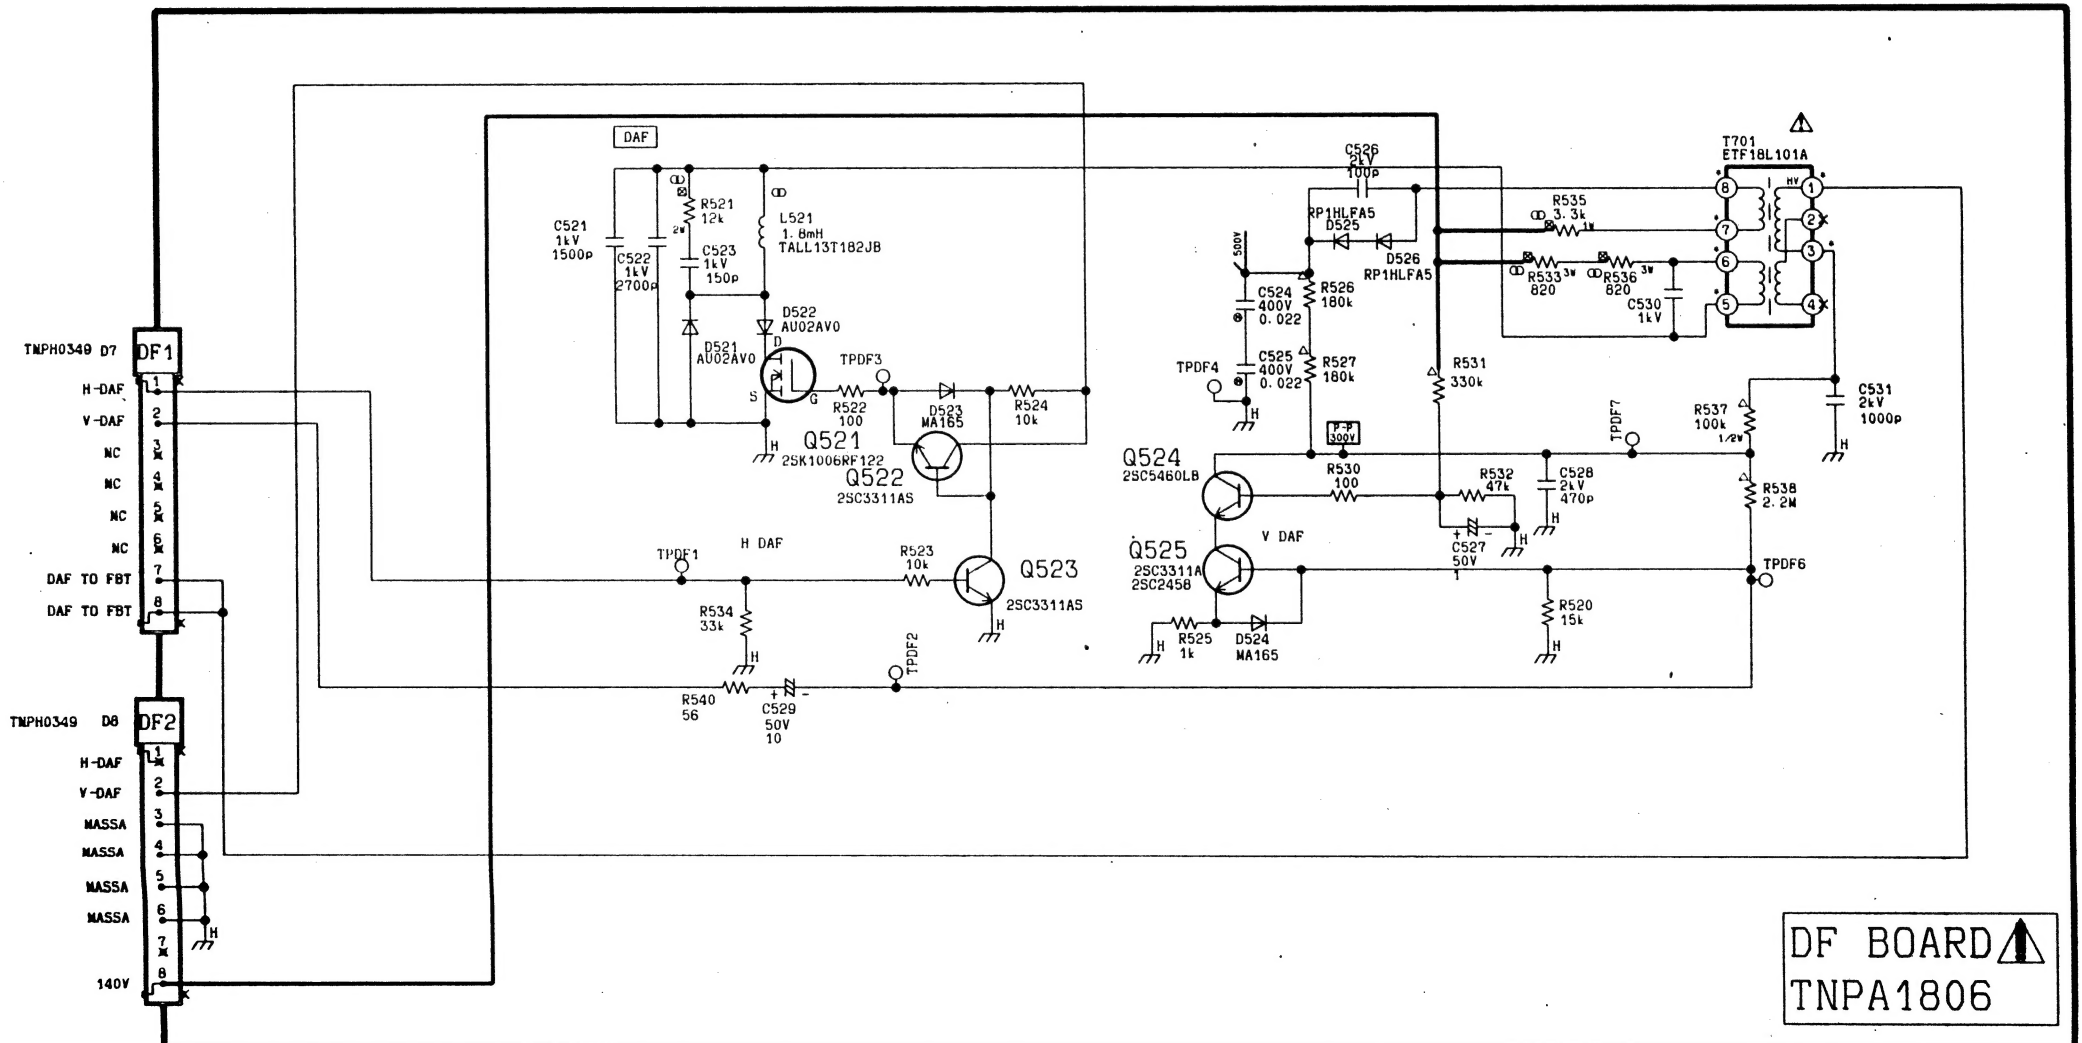

TELECOMANDO

